PPP-B-1088A
June 1, 1973
SUPERSEDING
Int. Fed. Spec. PPP-B-001088(GSA-FSS)
December 17, 1965

FEDERAL SPECIFICATION

BAG, COTTON DRILL

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE

1.1 This specification covers the requirements for cotton drill bags, of one type and size, with grommets or webbing, as specified (see 6.2), for suspension in waste receptacles.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issues in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

Federal Specifications:
V-T-276 - Thread, Cotton.
CCC-C-426 - Cloth, Drill, Cotton.
PPP-B-636 - Box, Shipping, Fiberboard.

Federal Standards:
Fed. Std. No. 123 - Marking for Domestic Shipment (Civil Agencies).
Fed. Std. No. 751 - Stitches, Seams and Stitchings.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington, DC 20402.

(Single copies of this specification and other Federal Specifications, required by activities outside the Federal Government for bidding purposes are available without charge from Business Service Centers at the General Services Administration Regional Offices in Boston, New York, Washington, DC, Atlanta, Chicago, Kansas City, Mo, Fort Worth, Denver, San Francisco, Los Angeles, and Seattle, WA.

(Federal Government activities may obtain copies of Federal Specifications, Standards and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Specifications:
MIL-G-16491 - Grommets, Metallic.
MIL-W-530 - Webbing, Textile, Cotton, General Purpose, Natural or in Colors.

Military Standards:
MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring agency or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:51Z
Check the source to verify that this is the current version before use.

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply.

National Motor Freight Traffic Association, Incorporated, Agent:
National Motor Freight Classification.

(Application for copies should be addressed to the American Trucking Associations, Inc., Tariff Order Section 1616 P Street, NW, Washington, DC 20036.)

Uniform Classification Committee, Agent:
Uniform Freight Classification.

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606.)

3. REQUIREMENTS

3.1 Preproduction sample. When specified (see 6.2), before production is commenced, a sample of the item covered by this specification, shall be submitted or made available to the contracting officer or his authorized representative for approval in accordance with 4.2. The approval of the preproduction sample authorizes the commencement of production, but does not relieve the supplier of responsibility for compliance with all applicable provisions of this specification. The preproduction sample shall be manufactured in the same facilities to be used for the manufacture of the production item.

3.2 Materials

3.2.1 Cloth, cotton drill. The cloth shall be of natural color, 7.7 ounces per square yard minimum, conforming to type 1, class 1, table 1 of CCC-C-426.

3.2.2 Webbing. Unless otherwise specified, the webbing shall be of natural color, 1-inch wide, plus or minus 1/16-inch, conforming to MIL-W-530, for type 1 of table I, or type II, table III.

3.2.3 Thread, cotton, machine. The thread shall conform to V-T-276 size 12/4, 24/4 or 30/4 for the applicable stitching operation at the option of the manufacturer.

3.2.4 Grommets. The grommets, when required, shall be brass, black chemical finish or bright finish, rolled flange, with spur washer No. 4. The grommets and washers shall conform to type III, class 1 or 3 of MIL-G-16491, (see 6.2).

3.2.5 Dimensions. The dimension of the end item, shall be 16 inches wide, by 16 inches in depth, by 22-1/2 inches long (see figure 1).

3.2.5.1 Dimensional tolerances: Dimensional tolerances shall be plus or minus 1/2-inch for length and plus or minus 1/4-inch for width or depth.

3.3 Construction. The construction, shall conform in all respect to the specifications listed in section 2, figure 1, and as specified herein.

3.3.1 Stitching. Unless otherwise specified, all stitching of seams shall conform to type 301 or 401 of Fed. Std. No. 751 at the option of the manufacturer. Thread breaks in stitching shall be overstitched not less than 1-inch at each break. Stitching shall be backstitched not less than 1-inch at the ends except where ends are turned under in a hem or held down by other stitching. Thread tension shall be maintained to avoid any loose stitching. All thread ends shall be trimmed.

3.3.1.1 Webbing attachment. To attach webbing at the corners, bartack stitches may be used at each edge of the webbing.

3.3.2 Seams. Seam allowances shall be maintained with seams properly sewn without runoffs, twists, pleats, puckers or open seams.

3.3.3 Setting of grommets. Holes, punched to receive the grommets, shall be smaller than the outside diameter of the grommet barrel, causing the barrel to be forced through the hole. The grommets shall be securely clinched without cutting the material.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:51Z
Check the source to verify that this is the current version before use.

3.4 Workmanship. The bags shall be uniformly constructed, free from holes, tears, cuts, splits or other defects which may impair their usefulness and shall conform to the levels of quality established herein.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspection are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Preproduction sample. Before production is begun, a sample, of the finished commodity conforming to the requirements of this specification, shall be submitted to the contracting officer for approval.

4.3 Sampling for inspection and acceptance. Except where otherwise indicated, sampling for inspection and acceptance shall be performed in accordance with the provisions of MIL-STD-105. For purpose of sampling, an inspection lot for examination and tests shall consist of all bags made by the same process from the same component material by one manufacturer, and submitted for delivery at one time.

4.3.1 Inspection of materials. In accordance with 4.1 above, the supplier is responsible for insuring that materials used were manufactured, tested and inspected in accordance with the requirements of referenced subsidiary specifications and standards to the extent specified, or, if none, in accordance with this specification. In the event of conflict, this specification shall govern.

4.3.2 In-process inspection. Inspection shall be made at any point or during any phase of the manufacturing process, to determine whether operations or assemblies are in accordance with requirements indicated herein and on the drawing. Care shall be taken, to see, that cut dimensions of webbing and body components are as specified. Whenever nonconformance is noted, correction shall be made to the items affected and lot in process. Failure to make immediate correction, shall be cause for rejection of end item lot.

4.3.3 Examination of the end item. An examination shall be made of the completely fabricated end item for defects in construction, design finish, workmanship and dimensions. Defects shall be classified as outlined in 4.3.3.1 and 4.3.3.2. The inspection levels and acceptable quality levels (AQL's) shall be as specified in 4.3.3.3. The sample unit shall be one completely fabricated bag. The inspection lot shall consist of all completely fabricated bags offered for acceptance at one time.

4.3.3.1 Examination of visual characteristics.

Examine	Defect	Classification	
		Major	Minor
Material	Holes, cuts or tears.	X	
Grommets	Malformed, omitted, burrs or sharp edges.	X	
Webbing	Size or type not as specified.		X
	Frayed or scalloped edges.	X	
	Not securely attached.	X	
	Misplaced or omitted.	X	
Seams and stitching open seams	More than 1/2 inch.		X
	More than 1 inch.	X	
Raw edges	Any raw edge not secured in stitching.	X	

Source: https://assist.dla.mil -- Downloaded: 20260-26T12:51Z
Check the source to verify that this is the current version before use.

CONTINUED

Examine	Defect	Classification Major	Minor
Seam and stitch type	Wrong seam and stitch type.	X	
Stitch tension	Loosely exposed bobbin or top thread.		X
	Excessive tightness or puckering of material.		X
Thread breaks	Backstitch less than 1 inch.		X
Number of stitches	Less than minimum specified.	X	
Stitching ends	Not backstitched as specified.		X
Hem	Formed on outside of bag.	X	
	Width less than specified.		X
	Twisted or pleated.		X
Cleanness	Grease or oil stains.		X

4.3.3.2 Examination for dimensional characteristics.

Examine	Defect	Classification Major	Minor
Dimensions	Smaller than specified.	X	
	Larger than specified.		X
Components	Other than specified.		X

4.3.3.3 Inspection levels and AQL's. The inspection levels and AQL's expressed in terms of defects per hundred units shall be as follows:

Examination	Inspection level	AQL's
For defects applicable to paragraph 4.3.3.1.	II	2.5 Major 6.5 Major and Minor 15.0 Total
For defects applicable to paragraph 4.3.3.2	S-3	10.0 one class

4.3.4 Inspection of preparation for delivery requirements. An inspection shall be made to determine that the packaging, packing and marking comply with the requirements in section 5 of this specification. Defects shall be scored in accordance with table I. For examination of interior packaging the sample unit shall be one shipping container fully prepared for delivery, selected at random just prior to the closing operations. Sampling shall be in accordance with MIL-STD-105. Defects of closure listed shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 with an acceptable quality level (AQL) of 4.0 defects per hundred units.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:51Z
Check the source to verify that this is the current version before use.

Table I Classification of preparation for delivery defects

Examine	Defects
Markings (exterior and interior)	Omitted; incorrect; illegible; improper size, location, sequence, or method of application.
Materials	Any component missing or damaged.
Workmanship	Inadequate application of components such as incomplete closure of container flaps, loose strapping, inadequate stapling. Distortion of container.
Contents (exterior and interior container)	Number per container is more or less than required.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A, B or C, as specified (see 6.2).

5.1.1 Level A. Bags, in quantities as specified (see 6.2), shall be compactly folded, packaged in reverse order and securely tied with cord, twine or tape.

5.1.2 Level B. Twelve (12) bags shall be compactly folded and packaged in reverse order in a close-fitting box conforming to PPP-B-636, class domestic.

5.1.3 Level C. The bags shall be packaged to afford adequate protection against deterioration and physical damage during shipment from the supply source to the receiving activity.

5.2 Packing. Packing shall be level A, B or C, as specified (see 6.2).

5.2.1 Level A. Bags, in quantities as specified (see 6.2), shall be packed in a box conforming to PPP-B-636, class weather-resistant. The box shall be closed, waterproof sealed and strapped in accordance with the appendix to the box specification.

5.2.2 Level B. Six (6) unit packages of bags, shall be packed in a box conforming to PPP-B-636, class domestic. The box shall be closed in accordance with the appendix to the box specification.

5.2.3 Level C. The bags shall be packed to afford adequate protection against physical and environmental damage during shipment, handling and limited storage. Containers shall be in accordance with Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

5.3 Marking. In addition to markings required by the contract or order, the packages and shipping containers, shall be marked in accordance with Fed. Std. No. 123 or MIL-STD-129, as applicable.

6. NOTES

6.1 Intended use. The bags covered by this specification are intended for use in waste receptacles.


6.2 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents.

(a) Title, number and date of this specification.
(b) If preproduction sample is required (see 3.1).
(c) Grommets if required and number (see 3.2.4).
(d) Level of packaging and packing (see 5.1 and 5.2).

Preparing activity:
GSA-FSS

Civil Agencies Coordinating Activities:
HEW VA
JUS GSA-FSS
FAA

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:51Z
Check the source to verify that this is the current version before use.

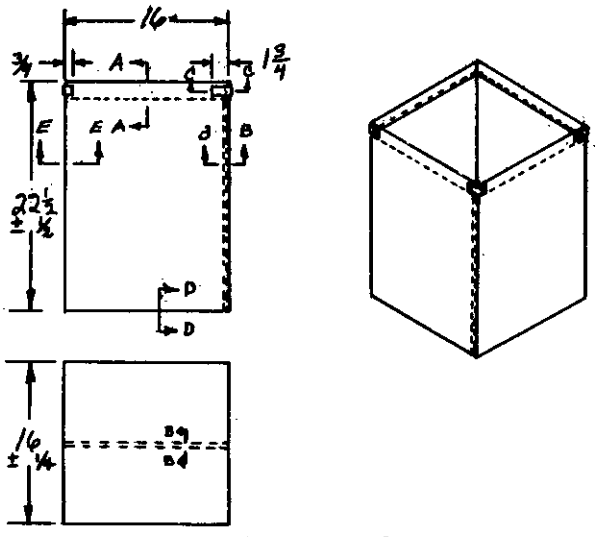

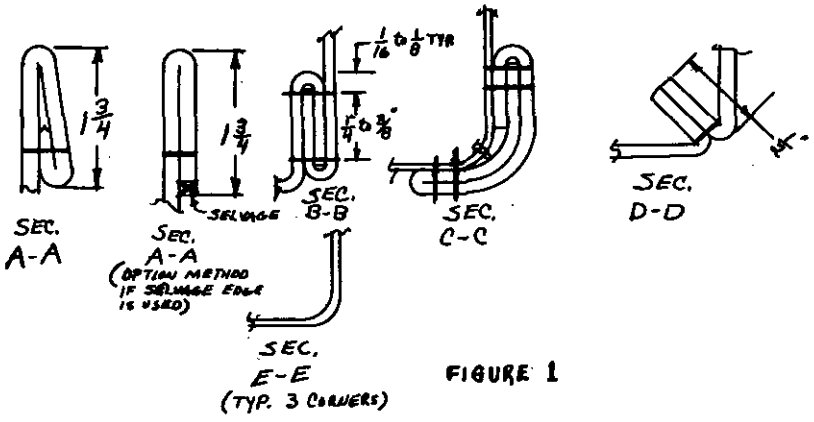


FIGURE 1

U. S. GOVERNMENT PRINTING OFFICE : 1973 0 - 544-599/1240

Orders for this publication are to be placed with General Services Administration, acting as an agent for the Superintendent of Documents. See section 2 of this specification to obtain extra copies and other documents referenced herein. Price 10 cents each.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:51Z
Check the source to verify that this is the current version before use.