PPP-B-1358A
February 23, 1973
SUPERSEDING
Int. Fed. Spec. PPP-B-001358
June 20, 1967

FEDERAL SPECIFICATION

BAG, COTTON DUCK

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers the requirements for two cotton duck trash bags.

1.2 Classification.

1.2.1 Types. The bags shall be of the following types, as specified (see 6.2):

Type I - For trash carts.
Type II - For trash stands.

2. APPLICABLE DOCUMENTS

2.1 The following specifications and standards, of the issues in effect on date of invitation for bids, form a part of this specification to the extent specified herein:

Federal Specifications:

V-T-276 - Thread, Cotton.
CCC-C-419 - Cloth, Duck, Cotton, Unbleached, Plied-Yarns Army and Numbered.
PPP-B-636 - Box, Shipping, Fiberboard.

Federal Standards:

Fed. Std. No. 123 - Marking and Domestic Shipment (Civil Agencies).
Fed. Std. No. 751 - Stitches, Seams and Stitching.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.

(Single copies of this specification and other Federal specifications required by activities outside the Federal Government for bidding purposes are available without charge from Business Service Centers at the General Services Administration Regional Offices in Boston, New York, Washington, DC, Atlanta, Chicago, Kansas City, MO, Fort Worth, Denver, San Francisco, Los Angeles and Seattle, WA.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies).

Military Standards:

MIL-G-16491 - Grommets, Metallic
MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.

FSC 8105

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:51Z
Check the source to verify that this is the current version before use.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Preproduction sample. Unless otherwise specified (see 6.2), before production is commenced, a sample of the trash bag covered by this specification shall be submitted or made available to the contracting officer or his authorized representative for approval in accordance with 4.2. The approval of the preproduction sample authorizes the commencement of production, but does not relieve the supplier of responsibility for compliance with all applicable provisions of this specification. The preproduction sample shall be manufactured in the same facilities to be used for the manufacture of the production items.

3.2 Materials.

3.2.1 Cloth, duck, cotton. The cloth used in fabrication of the bag shall be natural, unbleached cotton duck cloth, conforming to CCC-C-419, Type I, No. 8 hard texture.

3.2.2 Thread. The thread for all stitching shall conform to V-T-276, Type III A, Table V, ticket number 12/4 for the needle and 24/3 for the looper well waxed. Alternatively, polyester thread conforming to V-T-285 of equal or better quality and strength may be used.

3.2.3 Grommets and washers. Grommets and washers, shall conform to MIL-G-16491, Type III, Class 8, Size No. 4 (see figs. 1 and 2).

3.3 Construction. The construction shall conform in all respects to the requirements specified herein and Figure 1 and 2.

3.3.1 Stitching. All stitching shall conform to Fed. Std. No. 751, Type 401, 5 to 7 stitches per inch. Alternatively, stitches type 301, 6 to 8 stitches per inch may be substituted for the hem in the bag opening. Thread breaks in all stitching shall be overstitched not less than 1 inch at each break. Stitching shall be backstitched not less than 1 inch at the ends except where ends are turned under in a hem, or held down by other stitching. Thread tension shall be maintained to avoid loose stitching. All thread ends shall be trimmed.

3.3.2 Seams. Seam allowances shall be maintained, with seams properly sewn to avoid run-offs, twists, pleats, puckers, or open seams may result.

3.3.3 Setting of grommet. Holes, punched to receive the grommets, shall be smaller than the outside diameter of the grommet barrel, requiring the barrel to be forced through the hole. The grommets shall be securely clinched without cutting the material. The grommet pattern or location shall be as shown in Figure 1 and 2.

3.3.4 Hem. Fold three layer hem in bag opening as shown in Figure 1 and 2, after stitching vertical seams.

3.3.5 Dimensions. Dimensions for each type bag, shall be as shown in Figure 1 and 2.

3.3.6 Workmanship. The finished product shall be clean, free or holes, cuts, tears, broken or missing yarns. The grommets shall be free of burrs, sharp edges or corroded areas and shall not be broken or malformed.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements, as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:51Z
Check the source to verify that this is the current version before use.

4.2 Preproduction sample. Before production is begun, a sample of the finished commodity conforming to the requirements of this specification, shall be submitted to the contracting officer for approval.

4.3 Sampling for inspection and acceptance. Except where otherwise indicated, sampling for inspection and acceptance, shall be performed in accordance with the provisions of MIL-STD-105. For purpose of sampling, an inspection lot for examination and tests shall consist of all bags made by the same process from the same component material by one manufacturer, and submitted for delivery at one time.

4.3.1 Inspection of materials. In accordance with 4.1, the supplier is responsible for insuring that materials used where manufactured, tested and inspected in accordance with the requirements of referenced subsidiary specifications and standards to the extent specified, or, if none, in accordance with this specification. In the event of conflict, this specification shall govern.

4.3.2 In-Process inspection. Inspection shall be made at any point or during any phase of the manufacturing process, to determine whether operations or assemblies are in accordance with requirements indicated herein and in Figure 1. Care shall be taken to see that cut dimensions of the body components are as specified. Whenever nonconformance is noted, correction shall be made to the item affected and lot in process. Failure to make immediate correction, shall cause for rejection of end item lot.

4.3.3 Examination of the end item. Examination shall be made of the fabricated end product for defects in construction, design, workmanship, and dimension defects shall be classified as outlined and 4.3.3.1 and 4.3.3.2. The inspection level and acceptable quality levels (AQLs), shall be as specified in 4.3.3.3. The sample unit, shall be one fabricated bag. The inspection lot shall consist of fabricated bags offered for acceptance at one time.

4.3.3.1 Examination of visual characteristics. The sample unit shall be one bag.

Examine	Defects
Material	Holes, cuts or tears, broken yarn, weak place.
Grommets	Malformed, omitted, burrs, Not clinched securely, clinched cutting material, sharp edges misplaced, not of specified size or material.
Stitching	Not type stitch, stitching per inch not as specified, not backstitched when required, not overstitched when required.
Stitch Tension	Loosely exposed bobbin or top thread. Excessive tightness or puckering of material.
Seams	Not properly sewn - allowences not maintained, twisted, pleated or puckered.
Hem	Not formed as specified.

4.3.3.2 Examination for Dimensional Defects. The sample unit shall be one bag.

Examine	Defects
Dimensions	Smaller than specified - length, width, depth (see fig. 1 and 2).

4.3.3.3 Examination of Preparation for Delivery. An examination shall be made to determine whether the packaging, packing and marking comply with the requirements of section 5. Defects shall be scored as specified in Table I. Sampling shall be in accordance with MIL-STD-105. The sample unit shall be one container fully prepared for delivery. The lot shall be the number of containers offered for inspection at one time. The inspection level shall be S-2 with an acceptable quality level (AQL) of 4.0 defects per hundred units.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:51Z
Check the source to verify that this is the current version before use.

TABLE I. Examination of Preparation for Delivery

Examine	Defect
Containers	Not as specified.
Contents	Not as specified.
Markings	Omitted; incorrect; illegible; improper size, location, sequence or method of application.
Materials	Component missing or damaged.
Workmanship	Bulging or distortion of containers.

4.3.3.4 Inspection levels and AQLs. The inspection levels and AQLs expressed in terms of defects per hundred units shall be as follows:

Examination	Inspection Level	AQLs
4.3.3.1	II	2.5
4.3.3.2	S-2	2.5
4.3.3.3	S-2	4.0

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A, B or C, as specified (see 6.2).

5.1.1 Level A. Bags, in quantities as specified (see 6.2), shall be compactly folded, packaged in reverse order and securely tied with cord, twine or cotton tape.

5.1.2 Level B. Twelve (12) bags, shall be compactly folded and packaged in reverse order, in a close-fitting (without void space) box conforming to PPP-B-636, class domestic. Closure shall be in accordance with appendix to the box specification.

5.1.3 Level C. Bags shall be packaged to afford adequate protection against damage during shipment and storage from the supply source to the receiving activity. The supplier may use his standard practice when it meets this requirement.

5.2 Packing. Packing shall be level A, B or C, as specified (see 6.2).

5.2.1 Level A. Bags, in quantities as specified (see 6.2), shall be packed in a close-fitting (without void space) box conforming to PPP-B-636, class weather-resistant. The box shall be closed, waterproof sealed and strapped in accordance with the appendix to the box specification.

5.2.2 Level B. Four (4) packages shall be packed in a close-fitting box conforming to PPP-B-636, class domestic.

5.2.3 Level C. Bags, shall be packed to afford adequate protection against physical and environmental damage during shipment, handling and limited storage. Containers shall be in accordance with Uniform Freight Classification rules and National Motor Freight Classification rules, as applicable.

5.3 Marking. In addition to any markings required by the contract or order, the packages and shipping containers shall be marked in accordance with Fed. Std. No. 123 or MIL-STD-129, as applicable.

6. NOTES

6.1 Intended use. This specification covers the requirements for trash bags to be used with janitoral supply carts, paper towel and waterless hand cleaner stands.

6.2 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents.

(a) Title, number and date of this specification.
(b) Type of bag (1.2.1).
(c) Quantity required (5.1.1 and 5.2.1).
(d) Level of packaging and level of packing required (5.1, 5.2).

Preparing Activity
GSA-FSS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:51Z
Check the source to verify that this is the current version before use.

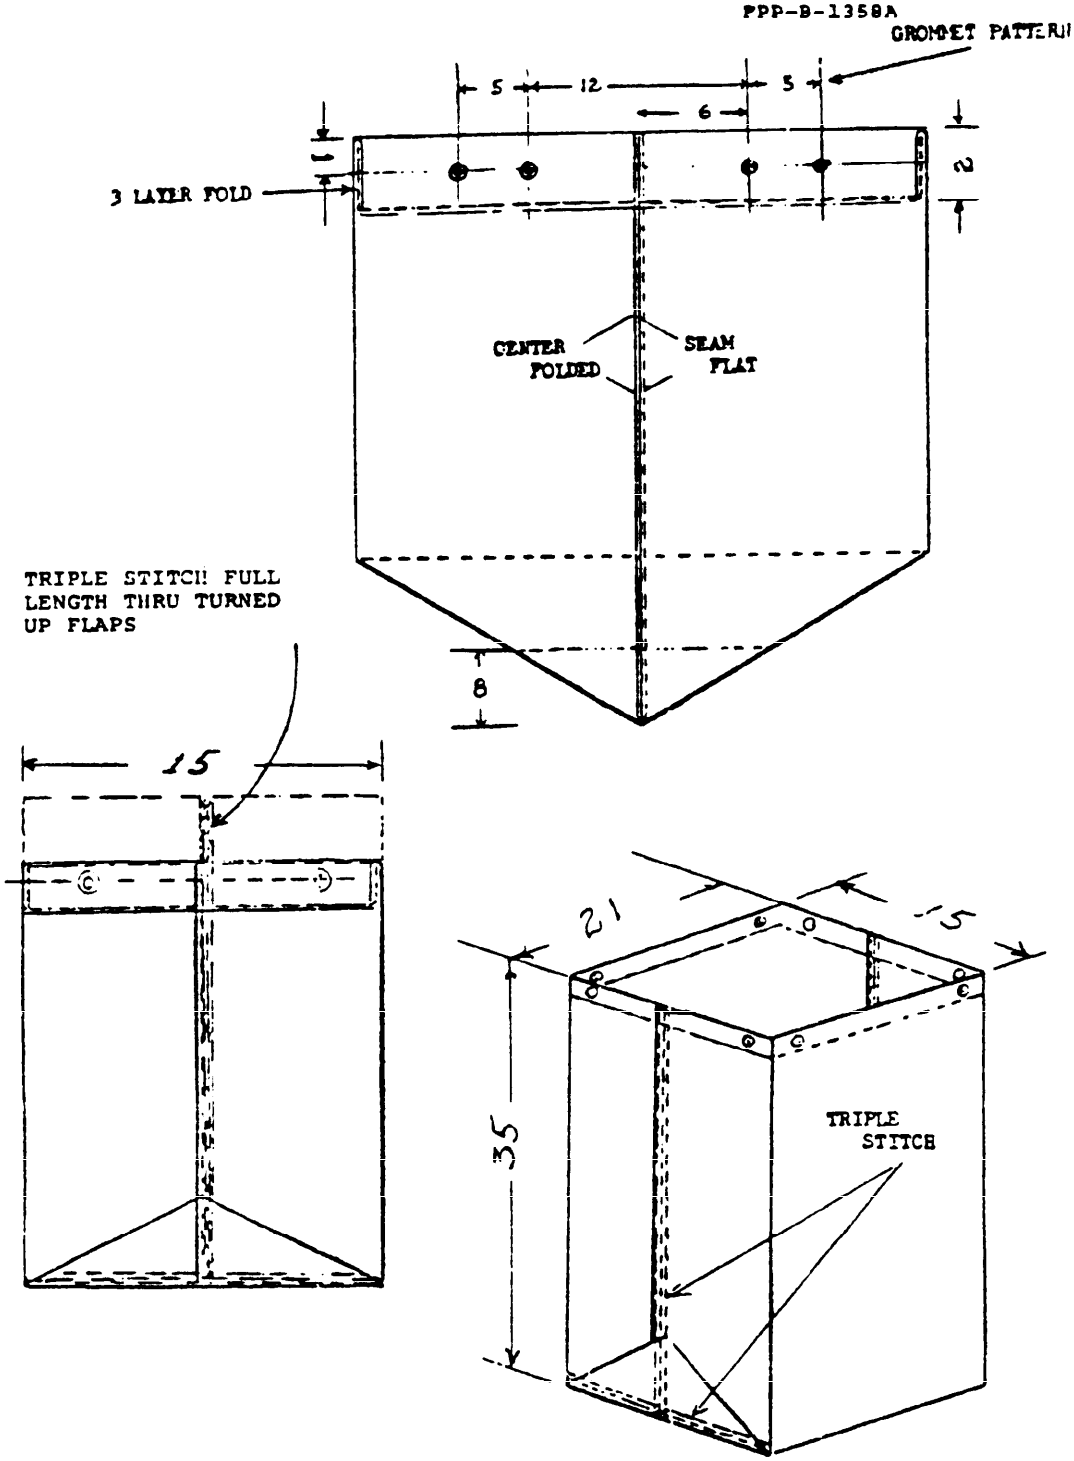


Figure 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:51Z
Check the source to verify that this is the current version before use.

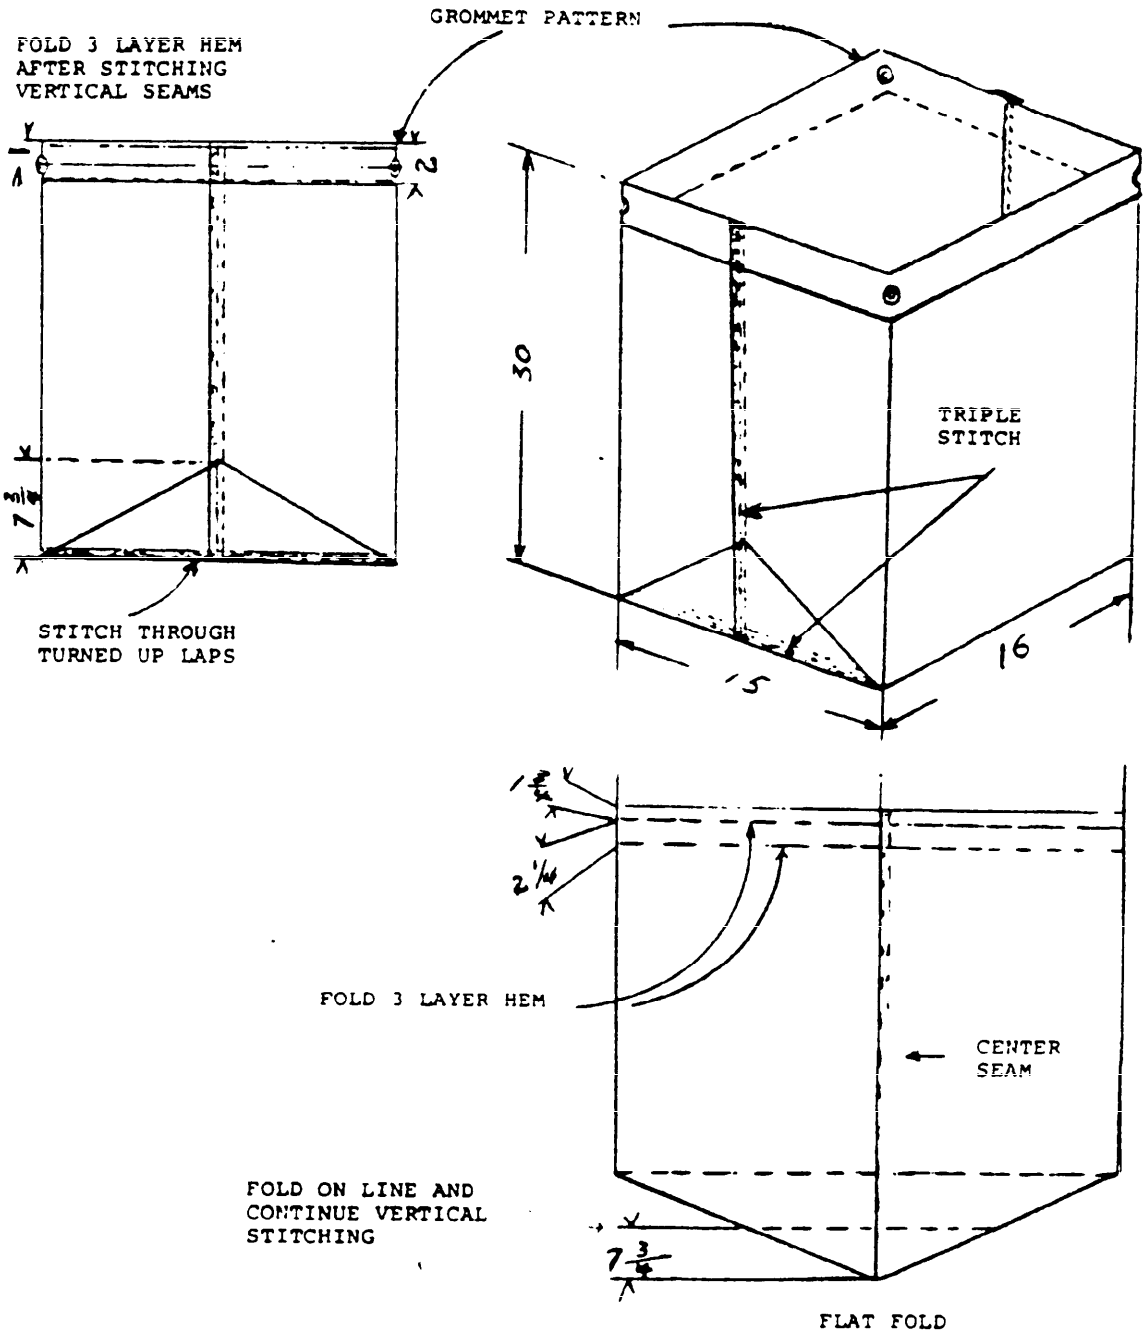


Figure 2

Orders for this publication are to be placed with General Services Administration, acting as an agent for the Superintendent of Documents. See section 2 of this specification to obtain extra copies and other documents referenced herein. Price is 10 cents each.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:51Z
Check the source to verify that this is the current version before use.