PPP-C-1752D
AMENDMENT-3
February 1, 1993
SUPERSEDING
AMENDMENT-2, dated
April 24, 1992

FEDERAL SPECIFICATION

CUSHIONING MATERIAL, PACKAGING, POLYETHYLENE FOAM

This amendment, which forms a part of PPP-C-1752D, dated December 26, 1989, prepared by the General Services Administration, Office Supplies and Paper Products Commodity Center, New York, N.Y. 10278, has been approved for use by all Federal Agencies.

Page 2

1.2.3 Type classifications., delete the following:

" stress range 0.2 - 2.0 psi "
stress range 1 - 3 psi
stress range 2 - 5 psi
stress range 4 - 10 psi "

Page 3

In the upper right corner, delete "PPP-B-1752D" and substitute "PPP-C-1752D".

Page 5

3.2.3 Type VII. first line, delete "Type VII cushioning material" and insert "Type VII packaging material".

Page 6

3.6 Constant compression creep (Types I, III, IV, V)., delete the existing chart of Types and applicable Static loads and substitute the following chart:

	Type	Static load, (psi)	
"	I	0.5	(Class 1 only)
	I	2.0	
	III	3.0	
	IV	5.0	
	V	10.0	"

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

FSC 8135

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:51Z
Check the source to verify that this is the current version before use.

3.7 Thermal stability., second line, delete "2 percent" and substitute "5 percent".

Page 8

3.12 Dynamic cushioning properties (Types I, III, IV and V, Classes 1 and 2)., line 2, delete "Classes 1 and 2", and substitute "Class 2".

Page 10

Under Table I, line 24, after "Fire retardancy", insert a footnote "1/".

Page 11

Under Footnote 1/, line 3, after 3.9, insert "3.11".

Under Footnote 1/, line 8, after 4.3.3.7, insert "4.3.3.9".

Page 12

4.3.3.3.1 Flexibility at 73.4°F (23°C)., second line, delete "4.5.3.4." and insert "4.3.3.3.".

4.3.3.3.2 Flexibility at -65°F (-54°C)., third line, delete "4.5.3.4." and insert "4.3.3.3.".

Page 13

4.3.3.12 Density., third line, delete "Suffix D" and insert "Suffix W".


Page 15

6.4. Supersession data., under PPP-C-1752D, Compressive strength range, delete "Type III 13 - 25 psi" and substitute "Type III 13 - 20 psi", also delete "Type IV 26 - 50 psi" and substitute "Type IV 21 - 50 psi".

Pages 16, 17, 18 and 19 delete the existing "DYNAMIC CUSHIONING CURVES" and substitute the following curves:


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:51Z
Check the source to verify that this is the current version before use.

Figure 1. Type I, Class 2
DYNAMIC CUSHIONING CURVES
2-inch thick, 24-inch Drop, 2-5 Impacts

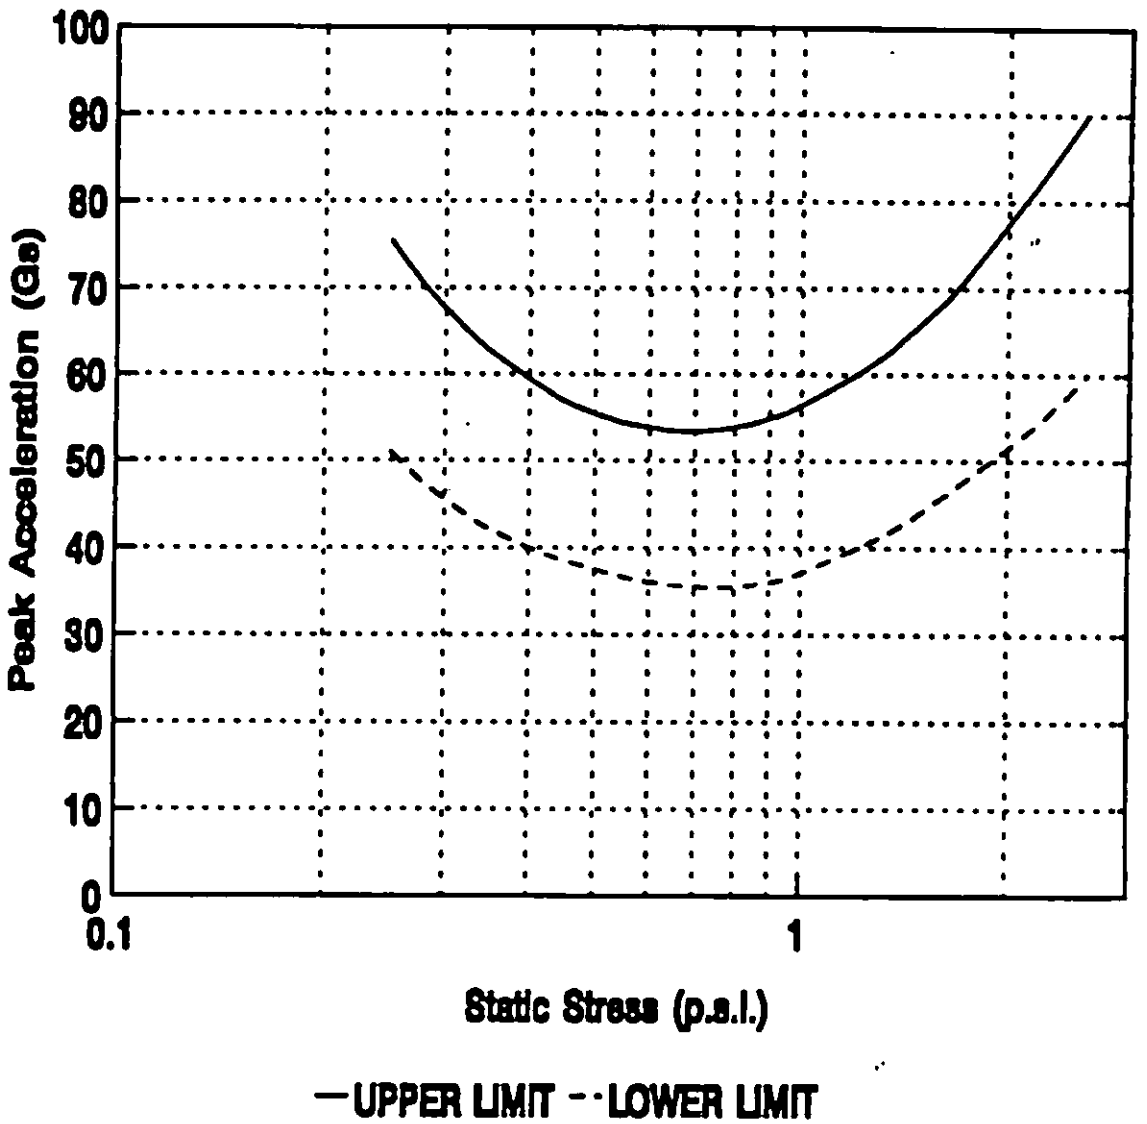


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:51Z
Check the source to verify that this is the current version before use.

Figure 2. Type III, Class 2
DYNAMIC CUSHIONING CURVES
2-inch thick, 24-inch Drop, 2-5 Impacts

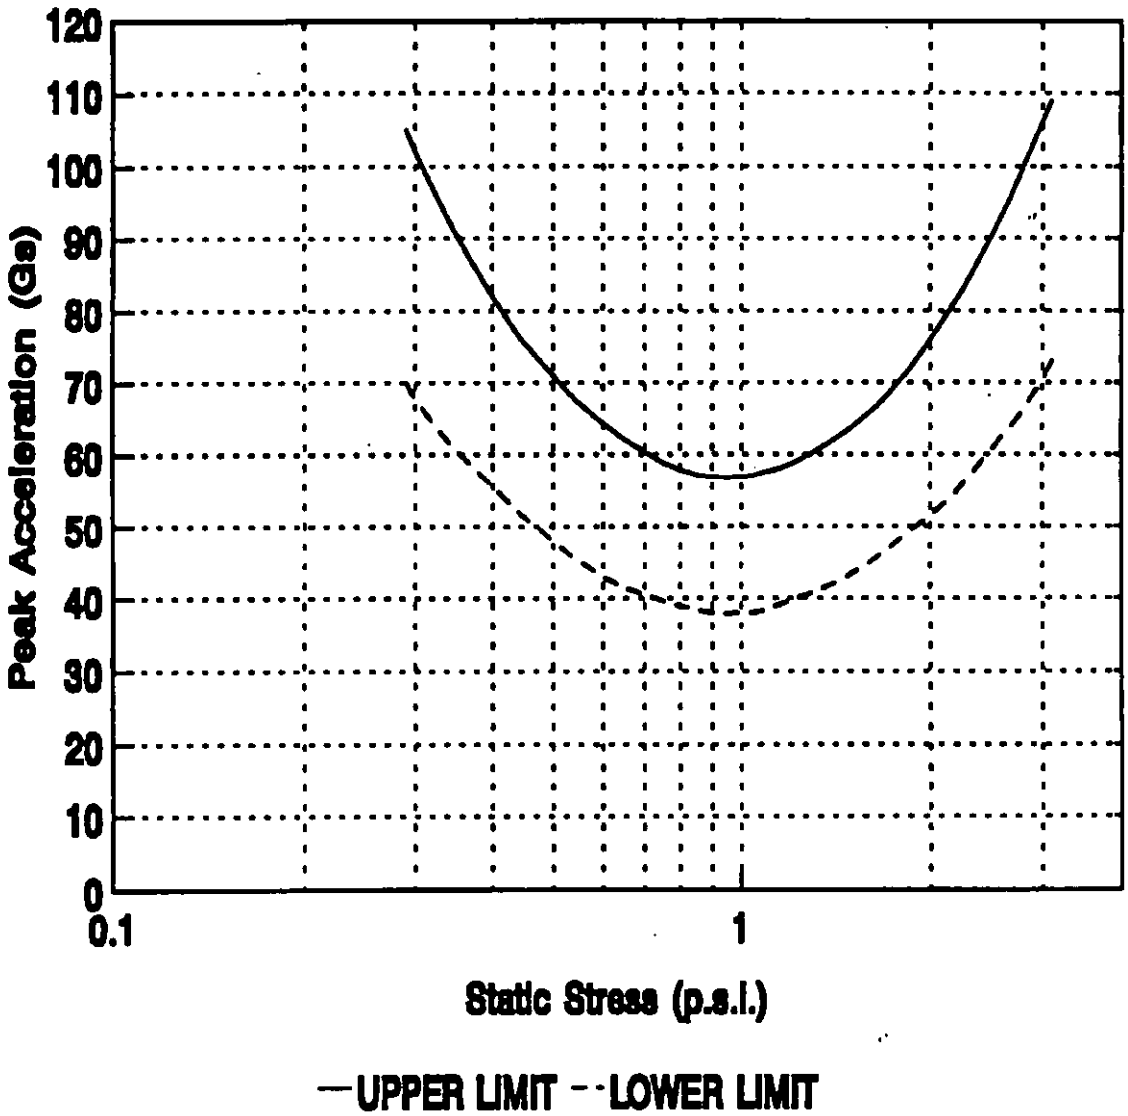


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:51Z
Check the source to verify that this is the current version before use.

Figure 3. Type IV, Class 2
DYNAMIC CUSHIONING CURVES
2-inch thick, 24-inch Drop, 2-5 Impacts

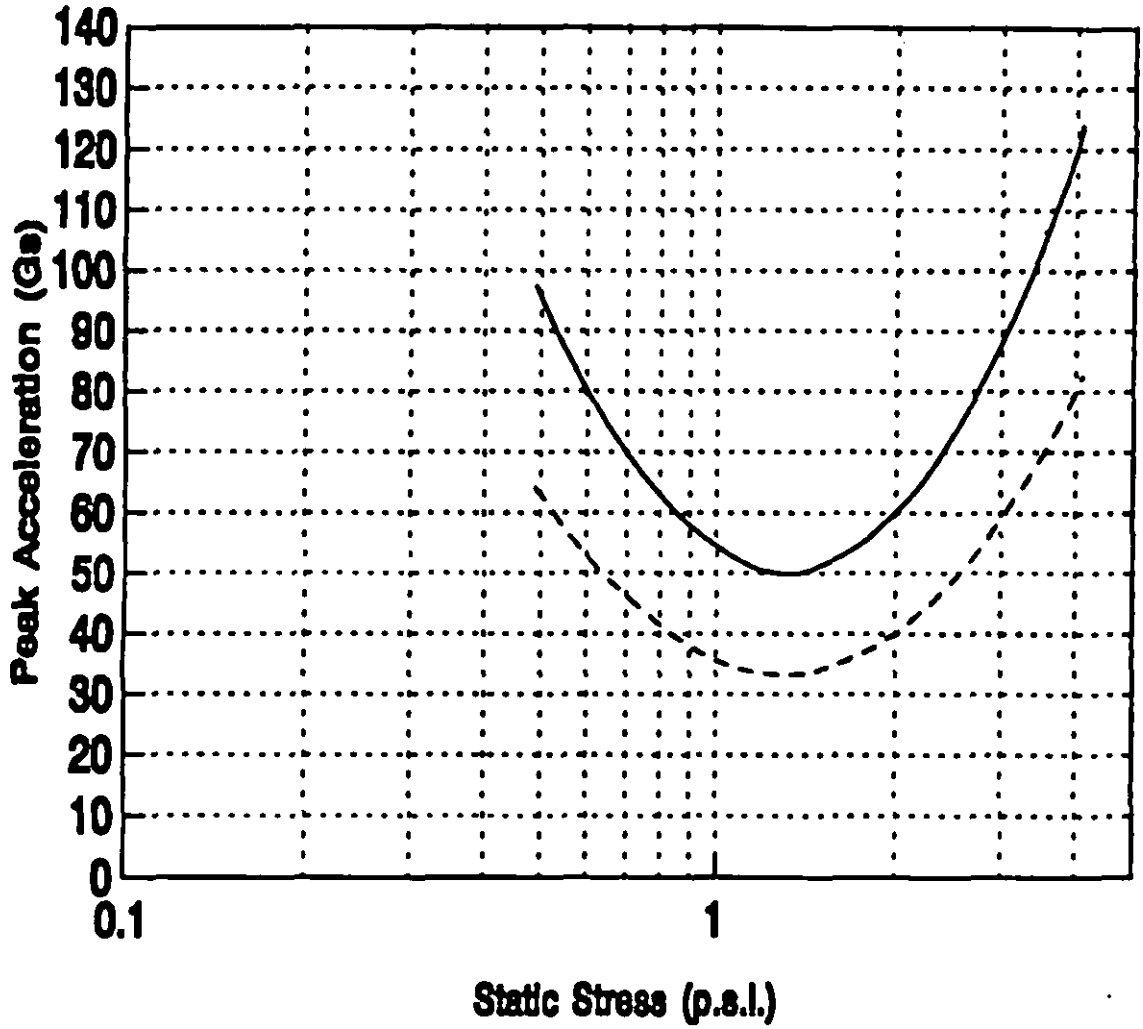

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:51Z
Check the source to verify that this is the current version before use.

Figure 4. Type V, Class 2
DYNAMIC CUSHIONING CURVES
2-inch thick, 24-inch Drop, 2-5 Impacts

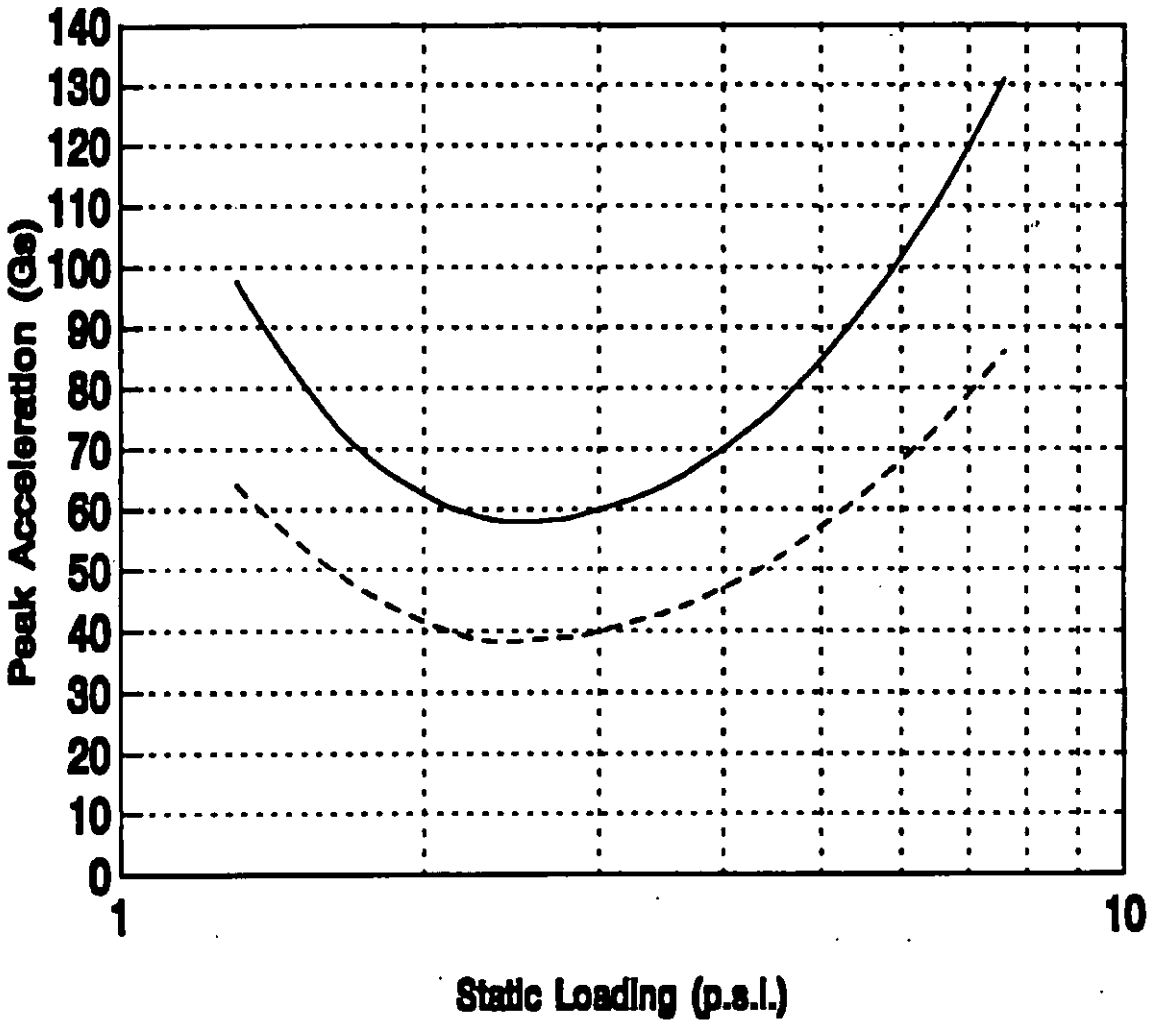

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:51Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS

Military Coordinating Activity

Air Force - 69

Custodians

Army - GL
Navy - AS
Air Force - 69
DLA - ES

Review activities

Army - AR, MI
Navy - OS, SA, SH

User activities

Army - SM
Air Force - 70, 71, 80, 84

PREPARING ACTIVITY

GSA - FSS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:51Z
Check the source to verify that this is the current version before use.