[INCH-POUND]
A-A-59439B
2 February 2017
SUPERSEDING
A-A-59439A
9 December 2013

COMMERCIAL ITEM DESCRIPTION

COUPLING HALVES, QUICK-DISCONNECT

The General Services Administration has authorized the use of this commercial item description for all federal agencies.

1. SCOPE. This commercial item description (CID) covers the general requirements for coupling halves, quick-disconnect. Coupling halves, quick-disconnect covered by this CID and are intended for commercial/industrial applications.

2. CLASSIFICATION/PART OR IDENTIFICATION NUMBER (PIN). This CID uses a classification system which is included in the PIN as shown in the following example (see 7.1).

AA59439	-	001	-	24	-	00	-	B
CID number		CID Dash code Type/class/style Code number (see table I)		Size code Number 1/ (See table II)		Hose size Number 2/ (See table III)		Material B = Brass C = Steel S = CRES 3/ (See 3.1.4)

1/ Table II size code indicates the nominal pipe size (NPT) for styles 1 and 2 and the hose ID for styles 3 and 4.
2/ Table III for style 4 coupling halves, the hose OD must be identified. For threaded ends use code 00, applicable for types I and II, styles 1 and 2.
3/ Corrosion resistant steel (CRES).

Beneficial comments, recommendations, additions, deletions, clarifications, etc., and any data that may improve this document should be sent to: DLA Land and Maritime, ATTN: VA**I**, P.O. Box 3990, Columbus OH 43218–3990, or email fluidflow@dla.mil. Since contact information can change you may want to verify the currency of the address information using the ASSIST Online database at https://assist.dla.mil/.

AMSC N/C

FSC 4730

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:14Z
Check the source to verify that this is the current version before use.

2.1 Classification. The coupling halves shall conform to the following types, classes and styles.

2.2 Type Code.

Type I - Female quick disconnect half
Type II - Male quick-disconnect half

2.3 Classes.

Class A - Low capacity (0.250-inch size)
Class C - High capacity (0.500-inch size)

2.4 Styles.

Style 1 - Male pipe threaded end
Style 2 - Female pipe threaded end
Style 3 - Barb hose end
Style 4 - Reusable hose end with hose locking sleeve

2.5 Example PIN:

AA59439-005-16-00B is a female coupling half, 1/2-inch NPT male pipe nipple type I, class C, style 1, brass.

2.6 Type, class and style code number. Type, class and style code number see table I, reference figures 1 through 8.

TABLE I. Type, class and style code number.

Code number	Type	Class	Style	Figure number
001	I	A	1	1
002	I	A	2	2
003	I	A	3	3
004	I	A	4	4
005	I	C	1	1
006	I	C	2	2
007	I	C	3	3
008	I	C	4	4
009	II	A	1	5
010	II	A	2	6
011	II	A	3	7
012	II	A	4	8
013	II	C	1	5
014	II	C	2	6
015	II	C	3	7
016	II	C	4	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:14Z
Check the source to verify that this is the current version before use.

2.7 Style 1 and 2 NPT and style 3 and 4 hose ID. Table II is applicable to:

NPT thread ends for styles 1 and 2 male and female thread end, see figure 1, 2, or 5.
ID of the hose for styles 3 and 4 hose barb end, see figure 3 or 7.

TABLE II. Applicable size code number for the different styles.

Code	Size (inches)		Style 1 Male NPT	Style 2 Female NPT	Style 3 Hose barb 1/
04	1/8	0.125	A & C	A & C	
06	3/16	0.187			A & C
08	1/4	0.250	A & C	A & C	A & C
10	5/16	0.313			A & C
12	3/8	0.375	A & C	A & C	A & C
16	1/2	0.500	C	C	C
20	5/8	0.625			C
24	3/4	0.750	C	C	C
00	N/A	N/A	Types I and II, style 4		

1/ If worm gear hose clamps are needed use A-A-52506, pinch clamps see SAE-J1508, type OES or TE.

2.8 Style 4 hose OD. Table III is applicable to type I or II style 4 (coupling half with hose locking sleeve) coupling half hose OD, see figure 4 or 8.

TABLE III. Hose OD code number.

Code	Size (inches)			Code	Size (inches)			Code	Size (inches)	
00	N/A 1/			17	17/32	0.531		33	1-1/32	1.031
01	1/32	0.031		18	9/16	0.562		34	1-1/16	1.062
02	1/16	0.062		19	19/32	0.593		35	1-3/32	1.093
03	3/32	0.094		20	5/8	0.625		36	1-1/8	1.125
04	1/8	0.125		21	21/32	0.656		37	1-5/32	1.156
05	5/32	0.157		22	11/16	0.688		38	1-3/16	1.188
06	3/16	0.188		23	23/32	0.718		39	1-7/32	1.218
07	7/32	0.218		24	3/4	0.750		40	1-1/4	1.250
08	1/4	0.250		25	25/32	0.781		41	1-9/32	1.281
09	9/32	0.281		26	13/16	0.813		42	1-5/16	1.313
10	5/16	0.313		27	27/32	0.843		43	1-11/32	1.343
11	11/32	0.344		28	7/8	0.875		44	1-3/8	1.375
12	3/8	0.375		29	29/32	0.906		45	1-13/32	1.343
13	13/32	0.406		30	15/16	0.937		46	1-7/16	1.437
14	7/16	0.437		31	31/32	0.968		47	1-15/32	1.468
15	15/32	0.468		32	1	1.000		48	1-1/2	1.500
16	1/2	0.500		33	1-1/32	1.031				

1/ For threaded ends use code 00, applicable for types I and II, styles 1 and 2, see figures 1, 2, 5, and 6.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:14Z
Check the source to verify that this is the current version before use.

3. SALIENT CHARACTERISTICS.

3.1 Interface and physical dimensions. Coupling halves, quick-disconnect supplied to this CID shall be as specified herein (see figures 1 through 8).

3.1.2 Design. Engagement of the coupling halves shall be accomplished by manually pushing the type II half into the type I socket until secure. Such engagement shall be done without tools and without manually rotating or manually retracting the type I actuating sleeve. It shall not be necessary to rotate the coupling halves with respect to each other in order to engage or disengage them. When engaged, the coupling halves shall be free to rotate with respect to each other under rated working air pressure.

31.3 Construction. Coupling halves shall consist of a body (including end fittings), actuating sleeve, shut-off valve, and locking mechanism. Threads for styles 1 and 2 shall be American Standard Pipe threads(NPT).

3.1.4 Materials.

3.1.4.1 Material code B (brass). Material code B halves shall have actuating sleeves and bodies (including end fittings) made of brass.

3.1.4.2 Material code C (steel). Material code C halves shall have actuating sleeves and bodies (including end fittings) made of steel.

3.1.4.3 Material Code S (CRES). Material code S halves shall have actuating sleeves and bodies (including end fittings) made of CRES.

3.1.4.4 Coupling springs. Coupling springs shall be made of CRES. Coupling valves and locking mechanism components shall be made of corrosion-resistant materials.

3.1.5 Metal surface. Wherever steel other than corrosion resistant steel is used in the coupling half, all surfaces shall be plated with nickel or zinc.

3.2 Type I half design. Halves shall be designed to properly engage type II halves of the same class and size. Styles 1 and 2 shall be similar to figures 1 and 2, respectively. Styles 3 and 4 shall be similar to figures 3 and 4, respectively; and shall be suitable for the ID hose specified. The style 4 locking sleeve shall be suitable for the OD hose specified.

3.2.1 Type II half design. Halves shall be designed to properly engage to type I halves and Class A to meet 0.250-inch size, and Class C to meet 0.500-inch size. Styles 1 and 2 shall be similar to figures 5 and 6, respectively. Styles 3 and 4 shall be similar to figure 6 and 7 respectively; and shall be suitable for the ID hose specified. The style 4 locking sleeve shall be suitable for the OD hose specified.

3.3 Performance. The coupling halves shall meet the performance requirements of this document. Type I halves must conform to table IV at 100 psi and 70°F (21°C) ambient temperature.

TABLE IV. Performance.

Class	Minimum flow CFM	Maximum pressure drop at specified minimum flow (psi)
A	10	2-1/2
C	35	2-1/2

3.3.1 Leakage. Type I halves shall not leak while engaged with or while disengaged from type II halves of the same class.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:14Z
Check the source to verify that this is the current version before use.

3.4 Structural rigidity.

3.4.1 Type I halves. While engaged with a type II half of the same class, the type I half shall withstand a crush load of 500 pounds applied uniformly to an area of the actuating sleeve surface not exceeding one square inch without permanent deformation or failure. It shall be capable of functioning after removal of the load. It shall not leak after removal of load.

3.4.2 Locking mechanism. The locking mechanism contained in the type I half shall withstand a tensile load of 500 pounds applied directly to an engaged type II half of the same class without releasing the type II half, or without deformation or failure of the type I half. The coupling shall not leak after removal of load.

3.5 Marking. Coupling halves, quick-disconnect supplied to this CID shall be marked with the manufacturer's (MFR's) standard commercial PIN. (NOTE: The part number marked on the unit pack shall be the CID PIN.)

3.6 Recycled, recovered, or environmentally preferable, or biobased materials. Recycled, recovered, or environmentally preferable, or biobased materials should be used to the maximum extent possible provided that the material meets or exceeds the operational and maintenance requirements, and promotes economically advantageous life cycle costs.

3.7 Workmanship. Coupling halves, quick-disconnect shall be processed in such a manner as to be uniform in quality and shall be free from other defects that will affect life, serviceability, or appearance.

4. REGULATORY REQUIREMENTS. The offeror/contractor is encouraged to use recovered material to the maximum extent practicable, in accordance with 23.403 of the Federal Acquisition Regulation (FAR).

5. PRODUCT CONFORMANCE PROVISIONS.

5.1 Product conformance. The products provided shall meet the salient characteristics of this CID, conform to the producer's own drawings, specifications, standards, and quality assurance practices, and be the same product offered for sale in the commercial marketplace. The Government reserves the right to require proof of such conformance.

5.2 Certification. Certification must be done with the procuring activity approval. The contractor shall certify that the product offered meets the salient characteristics of the description and conforms to the producer’s own drawings, specifications, standards, and quality assurance practices, and is the same as the product offered for sale in the commercial marketplace. The government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract

6. PACKAGING. Preservation, packing, and marking shall be as specified in the contract or order.

7. NOTES.

7.1 PIN. The PIN should be used for Government purposes to buy commercial products to this CID. See section 2 for PIN format example.

7.2 Commercial and Government Entity (CAGE) code. For ordering purposes, inventory control, and submission of these Coupling halves, quick-disconnect to DLA Land and Maritime under the (PMAT) evaluation program, CAGE code 58536 should be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:14Z
Check the source to verify that this is the current version before use.

7.3 Source of documents.

7.3.1 Government documents.

FEDERAL REGULATIONS

FAR – Federal Acquisition Regulations (FAR)

(Copies of this document is available online at www.acquisition.gov/comp/far/index.html.)

COMMERCIAL ITEM DESCRIPTIONS

A-A-52506 - Clamps, Hose

(Copies of this document is available online at http://quicksearch.dla.mil/.)

7.3.2 Non-Government publications.

SAE INTERNATIONAL

SAE-J1508 - Hose Clamp Specifications

(Copies of these documents are available online at http://standards.sae.org/.)

7.4 Ordering data. The contract or order should specify the following:

a. CID document number, revision, and CID PIN.

b. Product conformance provisions.

c. Packaging requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:14Z
Check the source to verify that this is the current version before use.

7.5 Commercial products. As part of the market analysis and research effort, this CID was coordinated with the following manufacturers of commercial products. At the time of CID preparation and coordination, these manufacturers were known to have commercial products that would meet the requirements of this CID. (NOTE: This information should not be considered as a list of approved manufacturers or be used to restrict acquisition to only the manufacturers shown.)

MFR's CAGE	MFR's name and address
14127	Foster Manufacturing Co. Inc. 2324 W Battlefield Rd Springfield, MO 65807-4098 aquigley@couplers.com (417) 881-6600
4VU52	Matkor Inc. 6524 Las Flores Dr Boca Raton, Fl 33433-2365 mati@matkor.com (561) 483-9240
5WGX1	SAB LLC 525 Lincoln HWY STE 30 Fairview Heights, IL 62208-2142 sabllco@yahoo.com (618) 541-0263

7.6 Government users. To acquire information on obtaining these coupling halves, quick-disconnect from the Government inventory system, contact DLA Land and Maritime, ATTN DLA Land and Maritime Call Center (–NAB), P.O. Box 3990, Columbus, OH 43218–3990 or telephone (614) 692-2271 or (614) 692-3191.

7.7 Legacy. This commercial item description is a replacement for MIL-C-4109 for all federal agencies (MIL-C-4109 is canceled as of 16 December 1999 and copies of these documents are available online at http://quicksearch.dla.mil/ or from the U.S. Government Printing Office, 732 North Capital Street, NW, Washington D.C. 20401.)

7.8 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

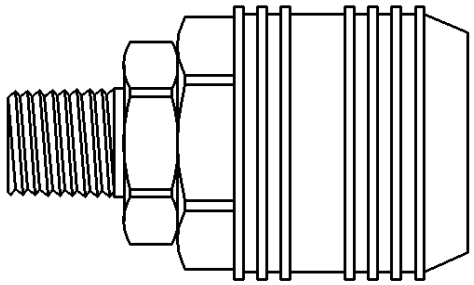


FIGURE 1. Typical type I, style 1 female coupling half, male pipe nipple.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:14Z
Check the source to verify that this is the current version before use.

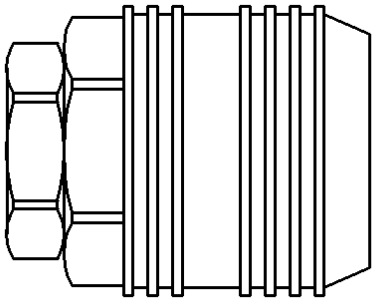


FIGURE 2. Typical type I, style 2 female coupling half, female pipe nipple.

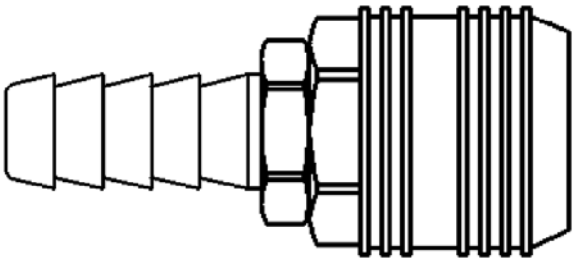


FIGURE 3. Typical type I, style 3 female coupling half with hose barb.

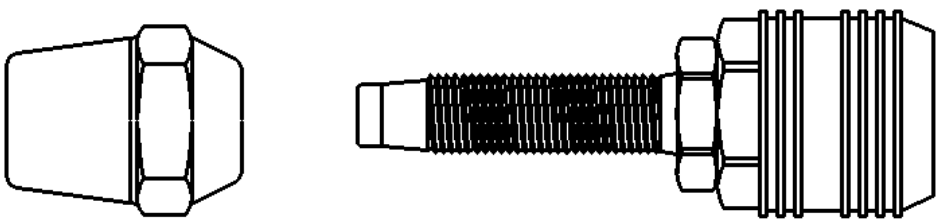


FIGURE 4. Typical type I, style 4 female coupling half with hose locking sleeve.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:14Z
Check the source to verify that this is the current version before use.

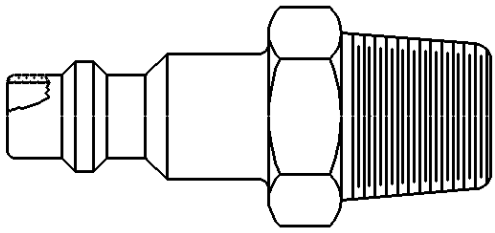


FIGURE 5. Typical type II, style 1 male coupling half, male pipe nipple.

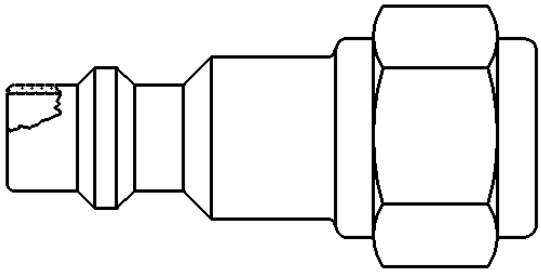


FIGURE 6. Typical type II, style 2 male coupling half, female pipe nipple.

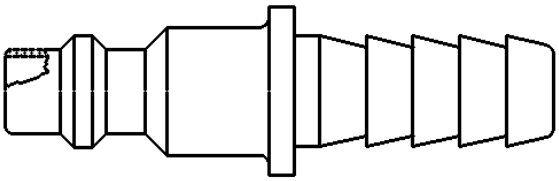


FIGURE 7. Typical type II, style 3 male coupling half, with hose barb.

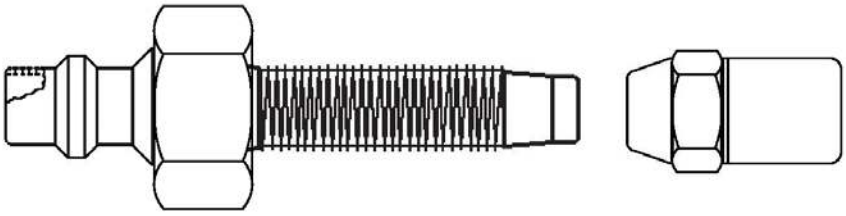


FIGURE 8. Typical type II, style 4 male coupling half with hose locking sleeve.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:14Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS

Custodians:
Army - CR4
Navy - AS
Air Force - 71
DLA - CC

Review activities:
Army - AR
Navy - SA,YD

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - FSS

Preparing activity:
DLA - CC

Project 4730-2017-035

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:14Z
Check the source to verify that this is the current version before use.