INCH-POUND

A-A-59453
16 January 2004

COMMERCIAL ITEM DESCRIPTION

CAP, SYNTHETIC MICROFLEECE

1. SCOPE

This commercial item description covers the requirements for a synthetic microfleece cap that is used as multi-purpose lightweight head protection. The cap is a modified commercial item since it requires a specific military appearance (See paragraph 3.2).

2. CLASSIFICATION

The cap will be of one type, in one size fits all and available in the following classes:

Class 1 – Black
Class 2 - Coyote

Comments, suggestions, or questions on this document should be addressed to: Defense Supply Center Philadelphia, Clothing and Textiles Directorate, Attn: DSCP-COCT (Bldg 6), 700 Robbins Ave., Philadelphia, PA 19111-5092 or emailed to henry.jansen@dla.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at www.dodssp.daps.mil

AMSC N/A FSC 8415

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:15Z
Check the source to verify that this is the current version before use.

3. SALIENT CHARACTERISTICS

3.1 Design and construction. The microfleece cap is a single ply construction in a bell shape, pull-on style with a crown shaped of four equal sections joined together by darts of equal length and with a 4 ± 1/8 inch wide hem that can be cuffed or worn down (see figure 1 and 2). This design provides a cap that is light in weight, low in bulk, has environmental protection, and compatible with the helmet and ECWCS parka hood.

3.2 Basic material. The following material shall be used to provide the environmental protection, user comfort; lightweight and durability needed for wear in field, combat, and operations other than war. The basic material for the cap shall be a 100% polyester circular knit terry with comfort stretch, double-sided, low micro velour (fleece) with moisture management properties, no-pill Polartec 100 Series Micro Style 9118M® pile or equal. The color of the fabric shall be Black for Class 1 and Coyote for Class 2. This material provides the required military appearance and functionality required by the Services. The fabric shall conform to the following physical requirements:

TABLE I. Knit cloth physical requirements

Characteristics	Requirement	Test Method
Fiber Content	100% polyester, no-pill, Polartec100 Series Micro Style 9107® pile or equal.	
Construction	circular knit terry	
Weight, oz./sq. yd	5.7 ± .0.6	ASTM D3776
Thickness @0.6psi	0.070 minimum	ASTM D1777
Air Permeability, CFM	175 minimum	ASTM D737
Colorfastness to: (minimum)		
Laundering	Class 3 or Class 4 or good	AATCC 61 - Option 2a, 3 cycles
Crocking,		
Wet	Class 3 or fair	AATCC 8
Dry	Class 4 or good	AATCC 8
Light		
Carbon Arc	20 & 40 Hrs. 3-4	AATCC 16
Xeon	85 & 170 Kj. – 3- 4	Option A and Option E

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:15Z
Check the source to verify that this is the current version before use.

Dimensional Stability – Avg.	Wales: 4.5% max. Courses: 4.5% max	AATCC 135- 3 cycles, III,A and The following parameters: 1/

1/ Sample size: 22 x 22 inches Wash: Permanent Press Cycle/ 105° ± 5° F water temperature Rinse Temperature: 80ºF ± 5° F, Dry: Permanent Press/ Medium Heat 30 minutes. Use 18-inch marks to determine dimensional stability

3.2.1 Thread. Thread for needle and bobbin (looper) shall be commercial 100% textured polyester thread, approximate Tex size 35, 2 or 3 ply conforming to A-A-52095, cotton or polyester covered polyester core thread approximate Tex size 35, 2 or 3 ply conforming to A-A-50199. All threads shall be non-staining and show good colorfastness to laundering. The thread shall match the basic material.

3.3 Labels. Each cap shall have an identification label and a care label. The labels may be combined. The identification label shall contain the item description, contract number, fiber content information and the contractor's name. The inscription shall have a minimum font size of 10 points. The inscription legibility, label, and label attachment shall last the expected life of the cap. If available, a basic material supplier care label and hang tag may be used, except the information must be as cited in paragraph 3.3.1.

3.3.1 Care Label. The care label shall include the following information:

Warm Wash
Tumble Dry Low
or Line Dry
DO NOT USE BLEACH
DO NOT IRON

3.3.2 Bar-code label/tag. Each cap shall be individually bar-coded with a Type VI, Class 17, and Label/Tag of MIL-DTL-32075. The Label/Tag shall be located so that it is completely visible on the item when it is folded and/or packaged as specified and shall cause no damage to the item.

3.3.3 Label placement. The labels shall be securely attached to the cap and positioned as follows:

(1) Care label and Identification label. At center back joining seam (± 1/2 inch) with top edge caught in the hem cover stitching.
(2) Barcode label: Attach to top of cap at center crown.
(3) USMC label: Placed at center back, on inside of cap as worn, with upper edge caught in hem stitching and remaining edges stitched to hem 1/16 to 3/16 inch from edge.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:15Z
Check the source to verify that this is the current version before use.

3.4 Patterns. The government shall furnish a pattern to maintain uniformity and consistency in manufacturing. Standard patterns provide an allowance of 3/8 inch for all joining seams. The government pattern shall be used to create the contractor's working pattern. Minor modifications are permitted to accommodate manufacturing procedures, however the design and finished measurements shall be maintained.

TABLE II. List of pattern parts.

Material	Nomenclature	Cut Parts
Polyester Fleece	Cap	1

3.5 Configuration. The following specifics are needed to provide uniform appearance; comfort and durability in use during field duties, combat, and operations other than war. End item construction and appearance shall conform to figure 1 and the finished dimensions (See 5.5) to maintain configuration.

3.5.1 Seaming. The seams shall be consistent, exhibit a uniform appearance and conform to the ASTM D-6193 Stitch Types listed in the table below. All material edges shall not ravel.

TABLE III. Seams.

Seaming Areas	Seam type	Gage	Stitch Type
Join darts and close center back seam	SSa-1	3/8 inch	504
Attach USMC label	EFa-1	1/16 to 3/16 inch from edge.	301
Hem stitching and catching labels	EFa-2	1/16 to 1/8 inch from edge	605

4. REGULATORY REQUIREMENTS

4.1 Recycled, recovered, or environmentally preferable materials. Recycled, recovered, or environmentally preferable materials should be used to the maximum extent possible provided that the material meets or exceeds the operational and maintenance requirements, and promotes economically advantageous life cycle costs.

5. PRODUCT CONFORMANCE

5.1 Product conformance. The products provided shall meet the salient characteristics of this commercial item description, and shall conform to the producer's own drawings, specifications, standards and quality assurance practices. The Government reserves the right to require proof of such conformance.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:15Z
Check the source to verify that this is the current version before use.

5.2 Acceptance criteria. Acceptance criteria shall be as specified in the contract or purchase order.

5.3 End item visual and dimensional examinations. Each cap selected for examination shall be visually and dimensionally examined. Lot inspections shall be in accordance with ANSI Z1.4

5.4. Defects. The cap shall be examined for the major defects listed below.

TABLE IV. End item examination

Examination	Defect
Materials	Any hole, cut, tears, run, needle chew or weakening defect in the material, any mend or patch, shade variation within a part or between parts, color not as specified.
Seams and stitching	Seam: puckered, distorted, pleated, wavy, twisted, irregular or open, loose stitch tension resulting in loose seam; seam type not as specified, raw edges. Stitches: broken or missing thread or stitch, stitch type not as specified.
Workmanship	Any component part omitted or not as specified, distorted, full, tight or twisted parts. Any defect not specified in this table which affects, form, fit or function.
Cleanness	Spot, stain, excessive thread ends not trimmed or removed, raw edges, odor.
Labels	Omitted, incorrect, illegible, not attached specified; bar codes omitted, not readable by scanner; human-readable interpretation (HRI) omitted or illegible; bar code not visible on folded, packaged item; bar code causes damage to the hood.
Dimensions and finished measurements	Not as specified.

5.5 Finished measurements. The cap shall conform to the dimensions specified in inches in the table IV below:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:15Z
Check the source to verify that this is the current version before use.

Table IV. Cap finished measurements

	One Size Fits All	Tolerance
1/2 Bottom Circumference 1/	10 3/4	+/- 1/4
Cap height 2/	9 1/2	+/- 1/4
Hem Width 3/	4	+/- 1/4

Measurements shall be taken as follows:

1/ With the cap laid flat and hem edges even, measure from folded edge to folded edge at base of cap.
2/ Measure along center back joining seam from top of cap to bottom edge of hem.
3/ Measure from bottom of cover stitch to base of hem.

6. PACKAGING

6.1 Packaging, packing and marking. Preservation, packing and marking shall be as specified in the contract or purchase order.

7. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory unless otherwise stated in the contract or purchase order.)

7.1 Source of Government documents. Copies of Military and Federal documents are available from:

Standardization Documents Order Desk
Bldg. 4D
700 Robbins Avenue
Philadelphia, PA 19111-5094

A-A-52095 - Thread, Polyester, Textured
A-A-50199 - Thread, Polyester Core, Cotton or Polyester Covered

MIL-DTL-32075 - Label: For Clothing, Equipage, and Tentage, (General Use)

7.2 Source of non-Government documents. The following documents form a part of this document to the extent specified herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:15Z
Check the source to verify that this is the current version before use.

ASTM International

ASTM D 737 Standard Test Method for Air Permeability of Textile Fabrics
ASTM D 1777 Standard Test Method for Thickness of Textile Materials
ASTM D 3776 Standard Test Method for Mass Per Unit Area (Weight) of Fabric
ASTM D 6193 Standard Test Method for Stitches and Seams

(For all inquires please contact the American Society For Testing and Materials, 100 Barr Harbor Drive, West Conshohocken, PA 19428). Website address http://www.astm.org

AATCC

AATCC 8 Colorfastness to Crocking: AATCC Crockmeter Method
AATCC 16 Colorfastness to Light
AATCC 61 Colorfastness to Laundering
AATCC 135 Dimensional Changes in Automatic Home Laundering of Woven and Knit Fabrics

(For all inquires please contact the American Association of Textile Chemists and Colorists (AATCC), P.O. Box 12215, Research Triangle Park, NC 27709-2215.) Website address http://www.aatcc.org

AMERICAN NATIONAL STANDARDS INSTITUTE

ANSI/ASCQ Z1.4- SAMPLING PROCEDURES AND TABLES FOR INSPECTION OF ATTRIBUTES

(For all inquires please contact the American National Standards Institute, 25 West 43rd Street, 4th Floor, New York, NY 10036). Website address http://www.ansi.org.

7.3 Subject term key words listing

Cap
Micro fleece

7.4 Intended use. The cap is intended for wear as multi-purpose lightweight head protection.

MILITARY INTERESTS:

Custodians
Navy - MC

PREPARING ACTIVITY:

DLA - CT

Project 8415-0246

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at www.dodssp.daps.mil

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:15Z
Check the source to verify that this is the current version before use.

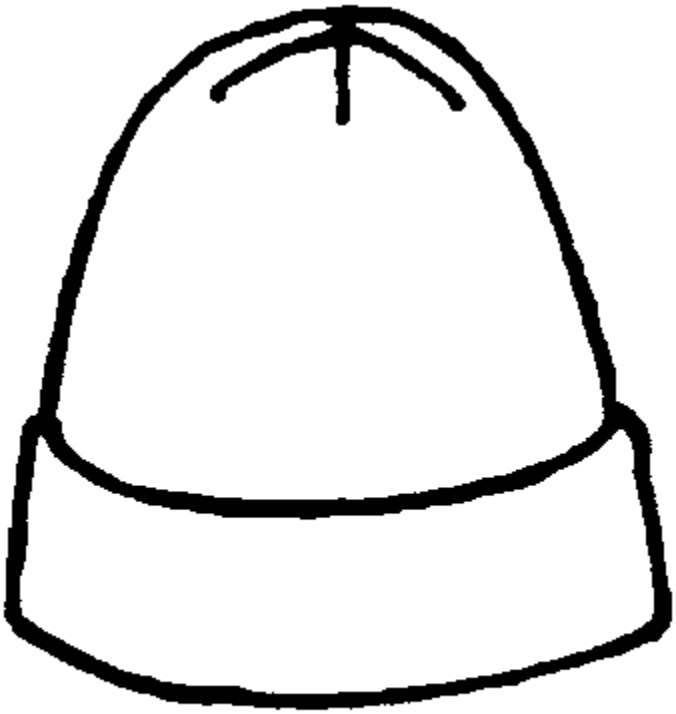


Figure 1: ***Viewed as worn***

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:15Z
Check the source to verify that this is the current version before use.

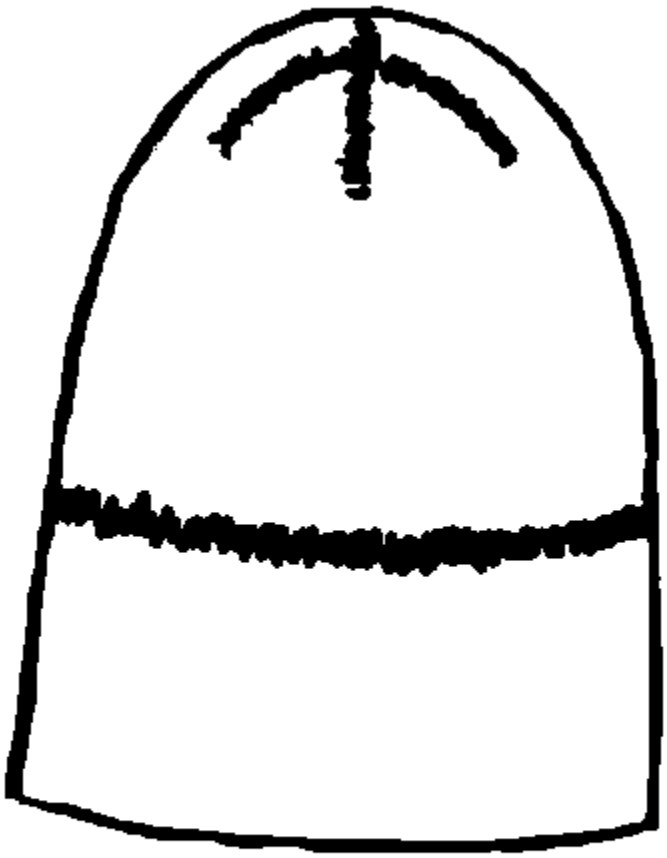


Figure 2: ***Inside view***

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:15Z
Check the source to verify that this is the current version before use.