INCH-POUND
A-A-59486
6 August 1999
SUPERSEDING
MS21313G
10 July 1992

COMMERCIAL ITEM DESCRIPTION

PADLOCK SET (INDIVIDUALLY KEYED OR KEYED ALIKE)

The General Services Administration has authorized the use of this Commercial Item Description for all federal agencies.

1. SCOPE: This Commercial Item Description (CID) covers key operated, dead bolt padlocks intended for low security use.

2. SALIENT CHARACTERISTICS:

2.1 Padlock set furnished under this CID shall be individual key or key alike operated, double dead -bolt locking construction and shall conform with the requirements of ASTM F883, Type P01, Option A (captive key). Padlocks shall be supplied with chains and conform to the dimensions as specified in Table I and figures below.

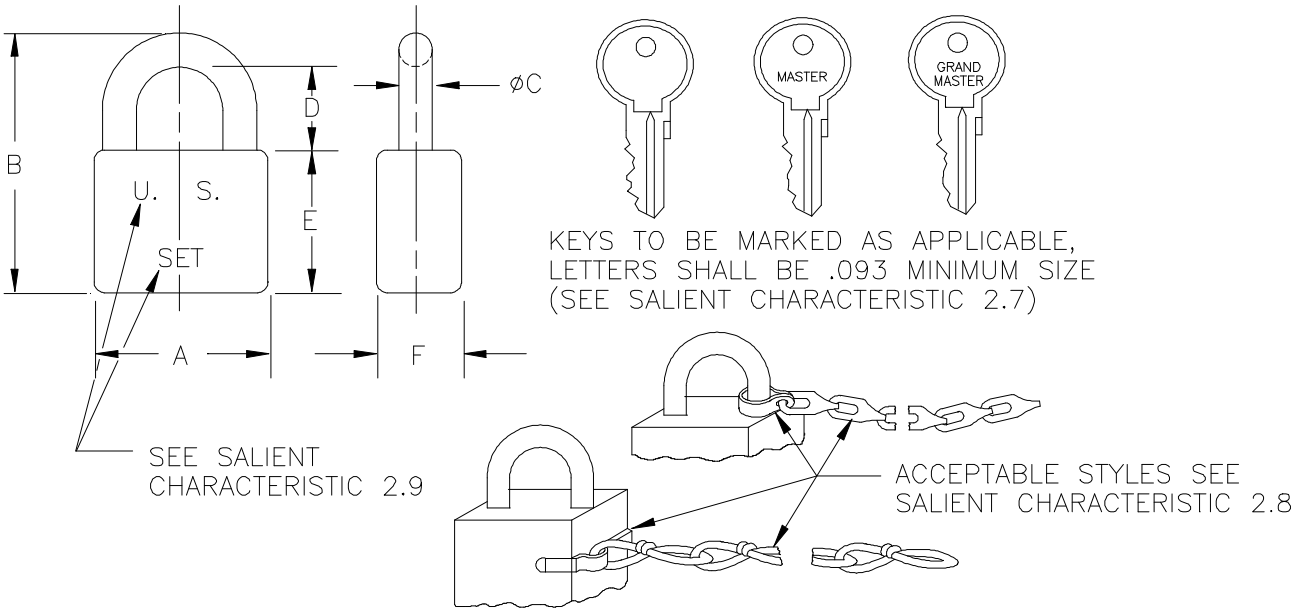


Beneficial comments, recommendations, additions, deletions, clarifications, etc., And data which may improve this document should be sent to: Defense Supply Center Philadelphia, ATTN: DSCP- IAB, 700 Robbins Avenue, Philadelphia, PA 19111-5096.

ASMC N/A FSC 5340

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:16Z
Check the source to verify that this is the current version before use.

Table I. DASH # and DIMENSIONS

| DASH # | A ± .062 | B REF | ∅C ± .040 | D | | E | | F MIN |
|---|---|---|---|---|---|---|---|---|
| | | | | MIN | MAX | MIN | MAX | |
| 1 | 1.500 | 2.344 | .281 | .688 | .750 | 1.250 | 1.438 | .594 |
| | 1.500 LONG SHACKLE | 4.156 | | 2.500 | 2.562 | | | |
| 2 | 1.750 | 2.719 | .343 | .750 | .812 | 1.438 | 1.830 | .688 |
| | 1.750 LONG SHACKLE | 4.562 | | 2.500 | 2.750 | | | |

2.2 Material. Shackle, case, spring and attachments shall be in accordance with the following:

a. Brass or bronze – conforming to ASTM B30, B505, B584, or B770.
b. Corrosion resistant steel, carbon steel or alloy steel as required in commercial practice unless otherwise specified.
c. Spring – shall be phosphor bronze conforming to ASTM B159.
d. Steel shackle – Shall be uniformly case hardened and shall meet the minimum desired grade requirements as specified for Forcing Tests of ASTM F883.
e. Attachment clevis – Shall be brass or steel with zinc electroplated coating of ASTM B633.

2.3 Finish. Brass or bronze – clear lacquer on exterior in accordance with commercial practice. Carbon steel or alloy steel – shall be zinc or chromium electroplated conforming to ASTM B633 or B177. Prior to application of any coating, all exterior surface shall have a smooth finish. Sharp edges and burrs shall be removed. The case surface shall have a smooth or tumbled finish for laminated construction.

2.4 Lubrication. Working parts shall lubricated as needed with a lubricant normally used for the intended purpose.

2.5 Case. Unless otherwise specified, the case shall be laminated or solid at the supplier's option of the materials indicated for the type of padlock. If steel case is specified, the case shall be uniformly case hardened steel with a hardness in the range of 40 to 50 on the Rockwell C scale (40-50 HRC).

2.6 Shackle. The shackle shall be "U" shaped and may be either spring released or pull released. The diameter of the shackle shall be as specified in Table I. When steel shackle is specified, the shackle shall be uniformly case hardened.

2.7 Keying. All keys shall be captive (unremovable) in the cylinder when unlocked. When individually keyed padlocks are specified, no key shall operate more than one (1) padlock per 50 padlocks. The key illustration depicts individually, master and grand master keys for padlocks as required.

2.7.1 Individually keyed padlock set. Individually keyed padlock set shall equipped with two (2) keys per lock and two master keys per set. For padlock set that have more than one (1) group, the set shall equipped with two (2) keys per lock, two master keys per group and two (2) grand master keys per set (see para. 4.2). Individually keyed padlocks shall have at least as many possible key changes as follow:

DASH # 1 – 4,000
DASH # 2 – 10,000

2.7.2 Keyed alike padlock set. Keyed alike padlock set shall equipped with key(s) per lock and key(s) per set as specified in the Part Identification Number (PIN) per 4.5b.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:16Z
Check the source to verify that this is the current version before use.

2.8 Chain. The chain supplied with the padlock shall conform to RR-C-271, Type II, Class 2 or 6 (brass or bronze). The chain shall be nine (9) inches long ± one (1) link.

2.9 Marking. The markings "U.S" and "SET" shall be .25 inch minimum size and can be located on either side of the padlock.

2.10 Padlocks as a minimum, shall be able to withstand the testing requirements for Grade 2 of ASTM F883 with the following exception:

a. For Surreptitious Entry Test, use Grade 1 in lieu of Grade 2 values for master key, grand master key, and keyed alike padlocks (Grade 2 for individually keyed padlocks only).
b. Substitute the Tensile force value per ASTM F883 with 800 pound-force (lbf) for dash # 1 padlocks and 2,000 lbf for dash # 2.

## 3 QUALITY ASSURANCE PROVISIONS.

3.1 Product conformance. The products provided shall meet the salient characteristics of this commercial item description, conform to the producer's own drawings, specifications, standards, and the quality assurance practices, and be the same product offered for sale in the commercial market. The government reserves the right to require proof of such conformance.

## 4 NOTES.

4.1 Unless otherwise specified, all dimensions are in inches.

4.2 Master keyed means that the master key shall open all padlocks in a group, but shall not open locks of another group within a set of groups. Grand master keyed means that the grand master key shall open all padlocks within all groups making up the set.

4.3 Unless otherwise specified in the contract or purchase order, packaging shall be in accordance with ASTM D3951.

4.4 In the event that the requirements of this document should conflict with ASTM F883, this document should take precedence.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:16Z
Check the source to verify that this is the current version before use.

4.5 The Part Identification Number (PIN) shall consist of the basic commercial item description number followed by a dash number from Table I, plus other option as specified in the examples below (Two digits are required to specify the # of padlocks. Add "0" for # of padlocks less than 10. Add "L" for long shackle to a set or to a specific group of a set.) :

a. Example for individually keyed padlock set:

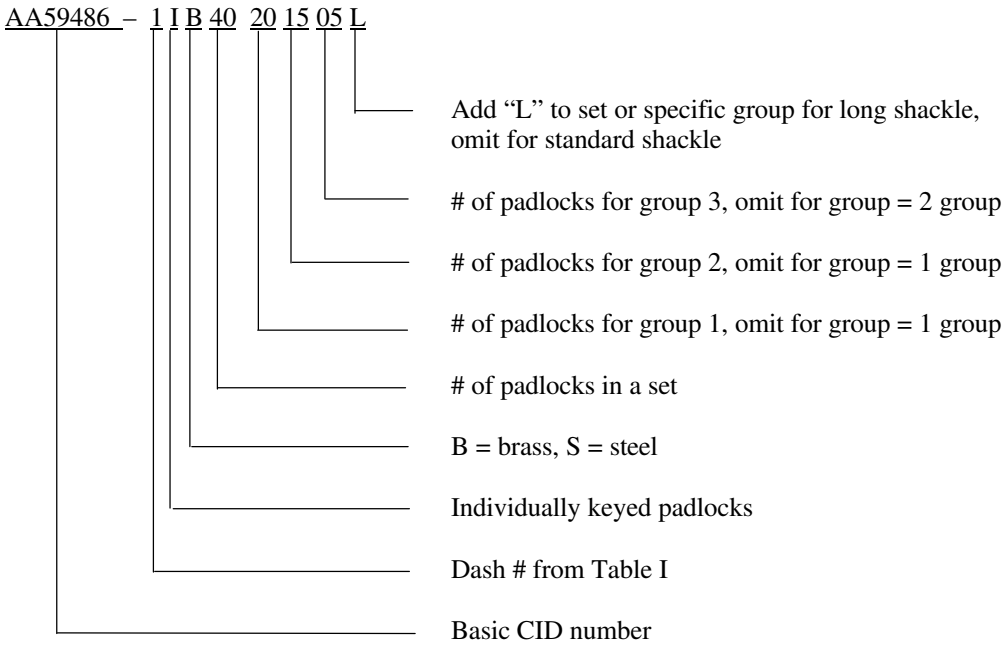


b. Example for keyed alike padlock set:

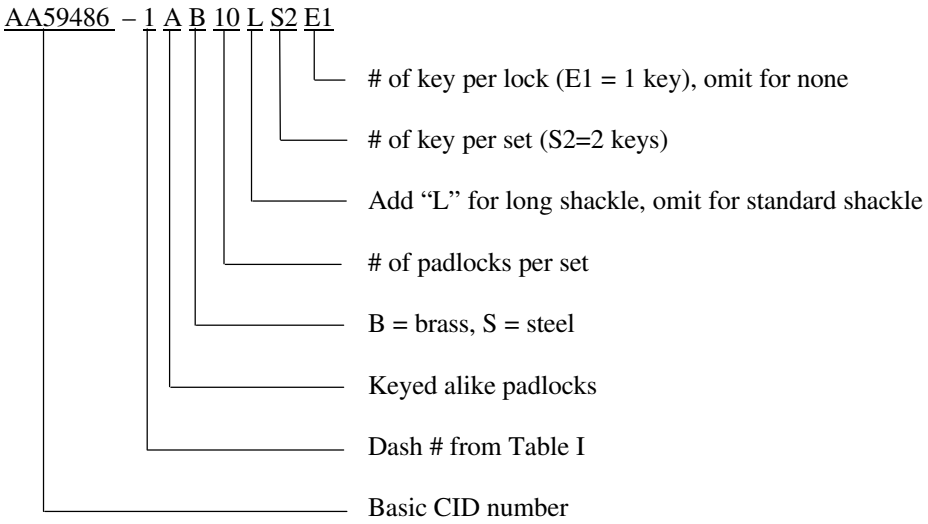




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:16Z
Check the source to verify that this is the current version before use.

4.6 Cross-reference data. Padlock sets conforming to this CID are interchangeable/substitutable with padlock sets conforming to MS21313G dated 10 Jul 1992.

Table II. CROSS – REFERENCE TABLE FOR ACTIVE MS PIN

| INDIVIDUALLY KEYED PADLOCKS | | KEYED ALIKE PADLOCKS | |
|---|---|---|---|
| Cancelled MS PIN | Replacement CID PIN | Cancelled MS PIN | Replacement CID PIN |
| MS21313-2 | AA59486-1IB05 | MS21313-52 | AA59486-1AB05S2E1 |
| MS21313-103 | AA59486-1IB10 | MS21313-53 | AA59486-1AB05LS2E1 |
| MS21313-6 | AA59486-1IB13050503 | MS21313-163 | AA59486-1AB06S3 |
| MS21313-10 | AA59486-1IB15 | MS21313-124 | AA59486-1AB10S2 |
| MS21313-12 | AA59486-2IB15 | MS21313-126 | AA59486-1AB20S2 |
| MS21313-105 | AA59486-1IB20 | MS21313-60 | AA59486-1AB25S2E1 |
| MS21313-14 | AA59486-1IB30 | MS21313-128 | AA59486-1AB30S3 |
| MS21313-18 OR MS21313-201 | AA59486-1IB30151005 | MS21313-130 | AA59486-1AB40S4 |
| | | MS21313-132 | AA59486-1AB50S5 |
| MS21313-108 | AA59486-1IB40 | | |
| MS21313-202 | AA59486-1IB40201505 | | |
| MS21313-118 | AA59486-1IB80 | | |
| MS21313-32 | AA59486-2IB80303020 | | |
| MS21313-207 | AA59486-2IB80402020 | | |
| MS21313-208 | AA59486-2IB80501515 | | |
| MS21313-121 | AA59486-1IB90 | | |
| MS21313-122 | AA59486-1IB100 | | |

MILITARY ACTIVITIES:

Custodian:
Army – AR
Navy – YD2
Air Force – 99

Review activities:
Army – AV, CR, MI
Navy – MC
Air Force – 82

CIVIL AGENCY COORDINATING ACTIVITY:
GSA – FSS

Preparing activity:
DLA – IS

(Project 5340-2602 )



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:16Z
Check the source to verify that this is the current version before use.