[INCH-POUND]
A-A-59497/1A
17 June 2010
SUPERSEDING
A-A-59497/1
23 February 2000

COMMERICAL ITEM DESCRIPTION

RESISTORS, VARIABLE, NONWIRE WOUND, NONPRECISION, 1 WATT

The General Services Administration has authorized the use of this Commercial Item Description (CID) for all federal agencies.

The complete requirements for procuring a nonwire wound, nonprecision, 1 watt, variable resistor described herein shall consist of this document and the issue in effect of CID A-A-59497.

* CLASSIFICATION/PART OR IDENTIFICATION NUMBER (PIN). This CID specification sheet uses a classification system which is included in the PIN as shown in the following example (see NOTES).

A59497	01	***	*	*	*	*
Abbreviated CID number	Applicable CID sheet (two digits)	Resistance	Resistance tolerance	Physical parameters	Operating shaft	Electrical rotation and linearity

SALIENT CHARTACTERISTICS

* Interface and physical dimensions. Resistors supplied to this CID specification sheet shall be as specified herein (see figure 1).

Resistance. The nominal resistance value expressed in ohms is identified by a three-digit number; the first two digits represent significant figures and the last digit specifies the number of zeros to follow. Resistance values for specific resistors are in accordance with table I.


NOTE: The available resistance values in table I, are based on electrical rotation, see table IV.

Resistance tolerance. The resistance tolerance available is K (±10 percent).

TABLE I. Nominal resistance value.

Resistance value designation	Nominal resistance value (Ohms)
501	500
102	1000
202	2000
502	5000
103	10000
203	20000
503	50000

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:16Z
Check the source to verify that this is the current version before use.

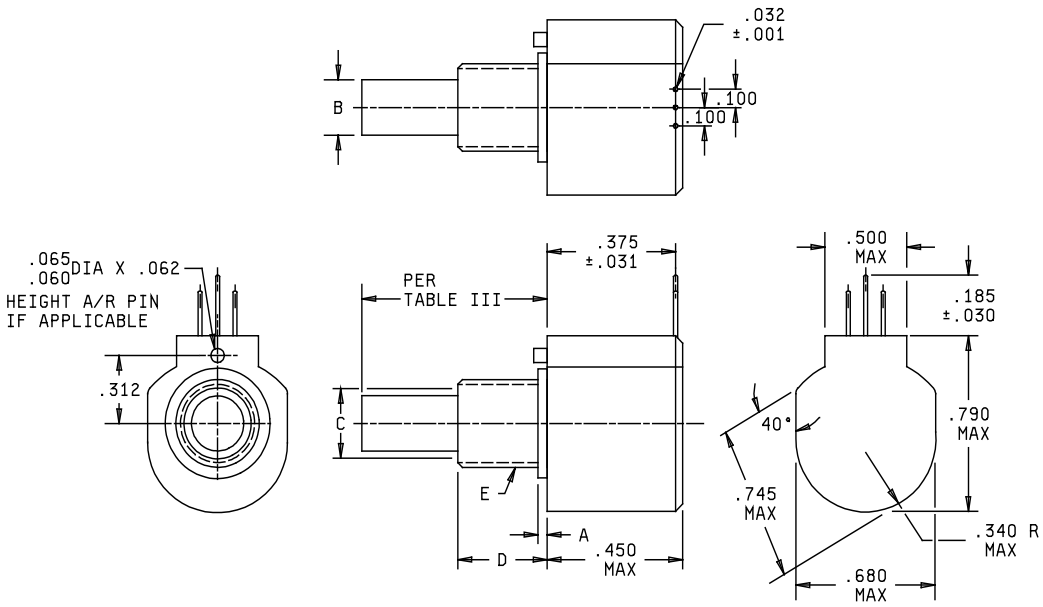

Dimension symbol	Physical parameters 1/			
	A	(mm)	B	(mm)
A	0.040	(1.016)	0.062	(1.57)
B	0.1242/0.1248	(3.15/3.17)	0.2487/0.2493	(6.32/6.33)
C	0.312	(7.92)	0.402/0.406	(10.21/10.31)
D	0.290	(7.37)	0.375	(9.53)
E 2/	0.250	(6.35)	0.375	(9.53)

1/ see table II.
2/ Bushing thread pitch is 32-2B UNEF.

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.001	0.025	.060	1.524	.185	4.699	.500	12.700
.010	0.254	.062	1.575	.312	7.925	.680	17.272
.030	0.762	.065	1.651	.340	8.636	.745	18.923
.031	0.813	.100	2.540	.450	11.430	.790	20.066

NOTES:
1. Dimensions are in Inches.
2. Metric equivalents are given for general information only.

FIGURE 1. Resistor, Variable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:16Z
Check the source to verify that this is the current version before use.

Physical parameters. The physical parameters shall be identified by a single letter in accordance with table II.

TABLE II. Physical parameters.

Symbol	Bushing diameter
A	0.250
B	0.375

Operating shaft. The operating shaft length and style shall be identified by a single letter in accordance with table III.

TABLE III. Operating shaft.

Symbol	Shaft length	Shaft style
A	.875	Plain
B	.875	Flatted
C	.875	Slotted
D	.750	Plain
E	.750	Flatted
F	.750	Slotted

Electrical rotation and linearity. The electrical rotation and linearity shall be identified by a single letter in accordance with table IV.

TABLE IV. Electrical rotation and linearity.

Symbol	Angle	Resistance							Linearity
A	300	---	---	---	5000	10000	20000	50000	2%
B	270	---	---	2000	5000	10000	20000	50000	2%
C	240	---	1000	2000	5000	10000	20000	50000	2%
D	180	500	1000	2000	5000	10000	20000	---	2%
E	120	500	1000	2000	5000	10000	---	---	2%

Power rating. The power rating shall be 1 watt at 70°C, derated to zero at 125°C.

Operating ambient temperature. The operating ambient temperature shall be –55°C to +125°C.

* Marking. Resistors supplied to this CID specification sheet shall be marked as specified in A-A-59497.

NOTES

* PIN. The PIN should be used for Government purposes to buy commercial products to this CID specification sheet. See CLASSIFICATION for PIN format example.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:16Z
Check the source to verify that this is the current version before use.

Source of documents.

COMMERCIAL ITEM DESCRIPTION

A-A-59497 - Resistors, Variable, Nonwire Wound, Wire Wound, Nonprecision, Precision, General Requirement for.

* (Copies of these documents are available online at https://assist.daps.dla.mil/quicksearch/ or from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094.)

* Commercial products. As part of the market analysis and research effort, this CID specification sheet was coordinated with the following manufacturers of commercial products. At the time of CID specification sheet preparation and coordination, these manufacturers were known to have commercial products that would meet the requirements of this CID specification sheet. (NOTE: This information should not be considered as a list of approved manufacturers or be used to restrict procurement to only the manufacturers shown).

MFR's CAGE	MFR's name and address
08815	Honeywell Sensing and Controls 245 Railroad Street Woonsocket, RI 02895 Formerly known as New England Instruments Phone: 1-800-537-6945 Fax: 815-235-6545 Email: info.sc@honeywell.com Website: www.honeywell.com

* Part number (P/N) supersession data. This CID specification sheet PINs supersedes the following manufacturers P/N as shown in table I. This information is being provided to assist in reducing proliferation in the Government inventory system.

TABLE I. P/N supersession data.

CID coded number	MFR's CAGE	MFR's P/N 1/
AA5949701*******	08815	SC******** or MC*******

1/ The manufacturers P/N shall not be used for procurement to the requirements of this CID specification sheet. At the time of preparation of this CID specification sheet, the aforementioned commercial products were reviewed and could be replaced by the CID PIN shown. For actual part marking requirements, see paragraph 3.9 of A-A-59497.

Government users. To acquire information on obtaining these resistors from the Government inventory system, Defense Supply Center, Columbus, ATTN: DSCC-CPB, Post Office Box 3990, Columbus, OH 43218-3990, or telephone (614) 692-7678.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:16Z
Check the source to verify that this is the current version before use.

* National Stock Number. This section is not applicable to this CID specification sheet.

* Changes from previous issue. The margins of this CID specification sheet are marked with an asterisk to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

MILITARY INTERESTS:

Custodian

NAVY - EC
DLA - CC

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - 7FXE

Preparing Activity:

DLA - CC

Project 5905-2010-015

NOTE: The activities listed above were interested in this document as the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:16Z
Check the source to verify that this is the current version before use.