INCH-POUND


MIL-DTL-29210/1
21 June 2010

DETAIL SPECIFICATION SHEET

HOSE ASSEMBLY, IRON, BRASS, AND CRES CONNECTORS, RUBBER, METAL LINED, WIRE REINFORCED, .750 AND 1.00 INCH HOSE, 250 PSIG, SATURATED STEAM SERVICE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-29210.

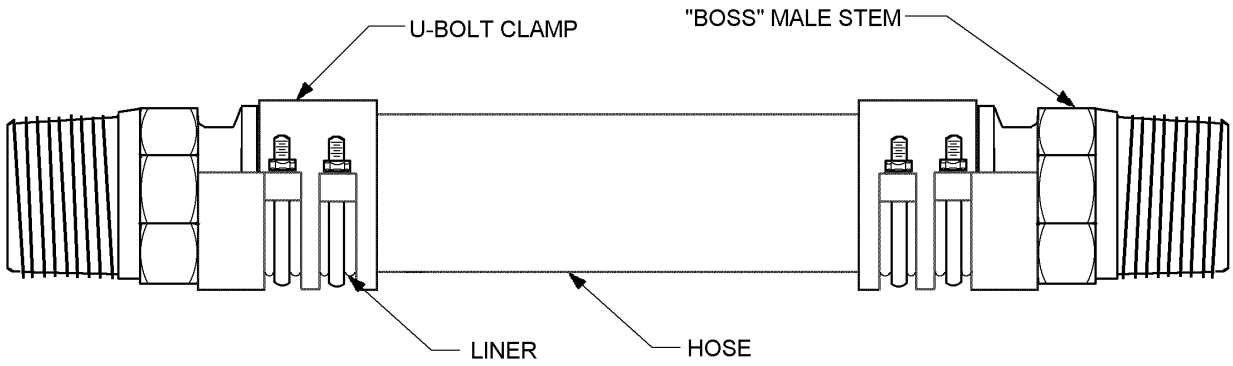

NOTE: .750 inch (19.05 mm) hose clamp may be a single type U-Bolt design.

FIGURE 1. Hose assembly configuration.

AMSC N/A

FSC 4720

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:15Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Hose assemblies described herein shall be manufactured with BOSS male stem fittings as specified herein and hose in accordance with MIL-DTL-29210.

Hose shall be in accordance with MIL-DTL-29210.

Hose assembly working pressure 250 psi (1.7 MPa) at 406°F (208°C).

All hose assemblies shall be subjected to the individual inspections of MIL-DTL-29210.

Hose ID designators shall be as specified in table I.

TABLE I. Hose size code number. 1/ 2/

Hose size code number	Hose size ID inches (mm)
075	.750 (19.05)
100	1.000 (25.40)

1/ Dimensions are in inches.
2/ Metric equivalents are given for information only.

Hose reinforcement wires shall be in accordance with MIL-DTL-29210. Designators shall be as specified in table II.

TABLE II. Reinforcement wire.

Code	Material
B	Brass plated high tensile carbon steel
S	CRES
Z	Zinc-plated high tensile carbon steel wire

Hose assembly configurations shall be as specified on figure 1.

Hose fittings shall be of the long shank, interlocking clamp type, having fingers or lugs on each half of the clamp to grip the collar on the stem.

Material for male stem, see table IV for designators:

Malleable iron in accordance with ASTM A47/A47M, grade 32510, or ductile iron in accordance with ASTM A536, grade 60-40-18 or grade 65-45-12, and shall be protected with a corrosion-resisting coating to withstand 90 hours of salt spray testing in accordance with ASTM B117. Gray iron castings in accordance with ASTM A48/A48M shall not be acceptable.

Brass in accordance with ASTM B61 or alloys C92200 or C90300 in accordance with ASTM B271, ASTM B505/B505M or ASTM B584.

Corrosion resistant steel (CRES) alloy 316 in accordance with SAE-AMS-5653.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:15Z
Check the source to verify that this is the current version before use.

TABLE III. Male stem material designators.

Material designator	Material
M	Malleable iron
B	Brass
S	CRES

Nipple: The nipple shall be Dixon “BOSS” Male Stem or equal, see table IV for size designators.

TABLE IV. Male stem hose and thread sizes. 1/ 2/

Male stems Designator	Male stems hose size	Thread size NPT
-12-8	.750 (19.05)	1/2 - 14
-12-12	.750 (19.05)	3/4 - 14
-12-16	.750 (19.05)	1 - 11.5
-16-12	1.000 (25.40)	3/4 - 14
-16-16	1.000 (25.40)	1 - 11.5


1/ Dimensions are in inches.
2/ Metric equivalents are given for information only.

U-Bolt:

Casting, if used, for U-bolt shall be malleable iron in accordance with ASTM A47/A47M, grade 32510.

The U-bolt bolts shall be factory set at the manufactures torque value.

Hose assembly length. The hose assembly length is calculated as specified on figure 2.

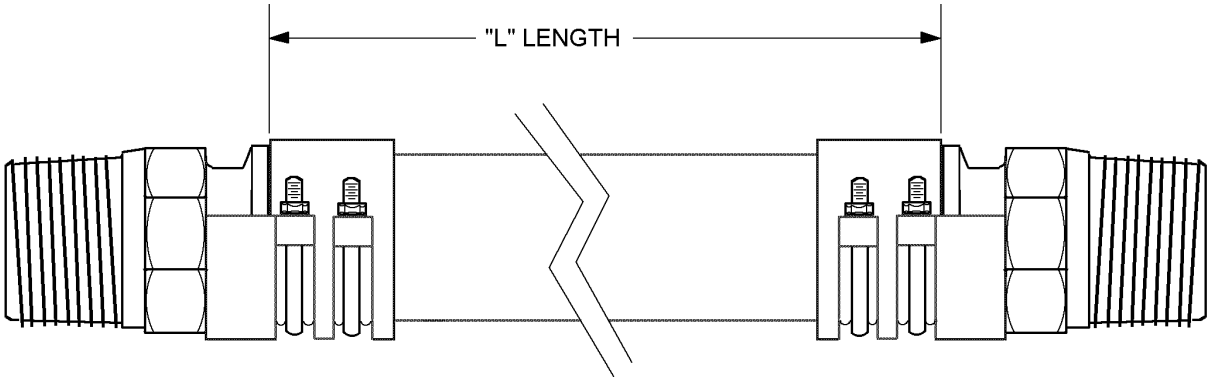


NOTES:
1. Lengths of hose “L” are represented by feet (25, 50, 75, and 100).
2. Hose length tolerance shall be in accordance with MIL-DTL-29210.
3. Figure is for illustration purposes only and is not meant to restrict designs.

FIGURE 2. Hose assembly dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:15Z
Check the source to verify that this is the current version before use.

Part or Identifying Number (PIN) example:

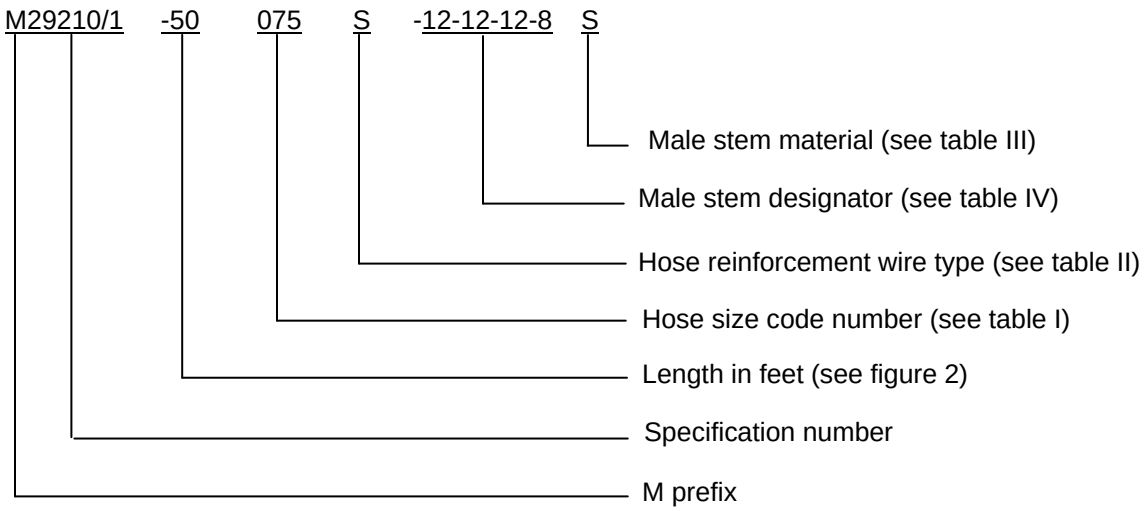

M29210/1-50100S-12-12-12-8S indicates - Hose assembly 50 feet long, .1.00 inch hose ID, malleable iron fittings with brass reinforcement wires, one hose stem is for .750 inch hose with .750 inch NPT threads and the other male stem is for .750 inch hose with .500 inch NPT threads.

Intended use: Temporary services from docks or barges to ships 250 psi, saturated steam service at a temperature of up to 406°F.

Referenced documents. In addition to MIL-DTL-29210, this document references the following:

ASTM A47/A47M
ASTM A48/A48M
ASTM A536
ASTM B61
ASTM B117
ASTM B271
ASTM B505/B505M
ASTM B584
SAE-AMS-5653

CONCLUDING MATERIAL

Custodians:
Army - AT
Navy - SH
Air Force - 99
DLA - CC

Preparing activity:
DLA - CC

(Project 4720-2009-026)

Review activities:
Army - AR
Navy - MC, SA
Air Force – 71

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:15Z
Check the source to verify that this is the current version before use.