| NOT MEASUREMENT |
| SENSITIVE |

MIL-V-29192B(YD)
27 September 1990
SUPERSEDING
MIL-V-29192A(YD)
21 December 1984

MILITARY SPECIFICATION

VAN, RECRUITING/EXHIBIT, FORWARD CONTROL, 4 BY 2

This specification is approved for use by the Naval Facilities Engineering Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

* 1.1 Scope. This specification covers a gasoline-engine-driven or diesel-engine-drive, four-wheel, two-rear-wheel-drive, forward control type recreational vehicle chassis having a minimum gross vehicle weight (gvw) of 10,000 pounds (lbs), equipped with custom recruiting/exhibit van body mounted on chassis frame.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

* 2.1.1 Specifications and standards. The following specifications and standards form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commanding Officer (Code 156), Naval Construction Battalion Center, Port Hueneme, CA 93043-5000, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 2320

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:09Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

O-E-910 - Extinguisher, Fire, Carbon Dioxide.
W-C-596 - Connector, Electrical, Power.
W-C-596/12 - Connector, Receptacle, Electrical, General Purpose, Duplex, Hospital Grade Grounding, 2 Pole, 3 Wire, 15 Amperes, 125 Volts, 50/60 Hertz.
W-C-596/13 - Connector, Plug, Electrical, General Purpose, Hospital Grade Grounding, 2 Pole, 3 Wire, 15 Amperes, 125 Volts, 50/60 Hertz.

STANDARDS

FEDERAL

FED-STD-297 - Rustproofing of Commercial (Nontactical) Vehicles.
FED-STD-595 - Colors.

MILITARY

MIL-STD-281 - Automotive, Trucks, Truck-tractors and Trailer Dollies, Preservation and Packaging of
MIL-STD-1223 - Non-Tactical Wheeled Vehicles, Treatment, Painting, Identification Marking & Data Plate Standards.

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from Military Specifications and Standards, Bldg. 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

* 2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

* DEPARTMENT OF TRANSPORTATION (DoT)

Federal Motor Vehicle Safety Standards and Regulations.
Federal Motor Carrier Safety Regulations.

(Application for copies should be addressed to the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.)

ENVIRONMENTAL PROTECTION AGENCY (EPA)

Control of Air Pollution from New Motor Vehicles and New Motor Vehicle Engines: Certification and Test Procedures.
Interstate Motor Carrier Noise Emission Standards.
Motor Vehicle Air Pollution Standards.
Title 40, CFR, Part 204 Subpart B - Noise Emission Standards for Construction Equipment.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:09Z
Check the source to verify that this is the current version before use.

(Application for copies should be addressed to the Public Affairs Office, Environmental Protection Agency, Rockville, MD 20852; or CFR, Title 40 should be addressed to the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.)

(Copies of specifications, standards, handbooks, drawings, and publications required by manufacturers in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

* 2.2 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted are those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the documents which are current on the date of the solicitation (see 6.2).

STATE OF CALIFORNIA

California Vehicle Code.

(Application for copies should be addressed to the Department of Motor Vehicles, 2570 24th Street, Sacramento, CA 95809.)

NATIONAL ELECTRICAL MANUFACTURERS ASSOCIATION (NEMA)

NEMA - WC 3 - Rubber-Insulated Wire and Cable for the Transmission and Distribution of Electrical Energy.
NEMA - WD 5 - Wiring Devices, Specific Purpose.

(Application for copies should be addressed to the National Electrical Manufacturers Association, 2101 L Street, N.W., Washington, DC 20037.)

NATIONAL FIRE PROTECTION ASSOCIATION (NFPA)

NFPA No. 501C - National Electrical Code.

(Application for copies should be addressed to the National Fire Protection Association, Batterymarch Park, Quincy, MA 02269.)

SOCIETY OF AUTOMOTIVE ENGINEERS, INC. (SAE)

SAE Standards and Recommended Practices

SAE J534 - Lubrication Fittings.
SAE J551 - Performance Levels and Methods of Measurements of Electromagnetic Radiation from Vehicles and Devices (30-1000 MHz).
SAE J588 - Turn Signal Lamps.
SAE J589 - Turn Signal Switch.
SAE J682 - Rear Wheel Splash and Stone Throw Protection (DoD adopted).
SAE J684 - Trailer Coupling, Hitches and Safety Chains - Automotive Type.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:09Z
Check the source to verify that this is the current version before use.

SAE J895 - Five Conductor Electrical Connectors for Automotive Type Trailers.
SAE J1292 - Automotive, Truck-Tractor, Trailer, and Motor Coach Wiring
SAE J1349 - Engine Power Test Code- Spark Ignition and Diesel.

(Application for copies should be addressed to the Society of Automotive Engineers, Inc., 400 Commonwealth Drive, Warrendale, PA 15096.)

TIRE AND RIM ASSOCIATION, INC (TRA)

TRA Yearbook.

(Application for copies should be addressed to the Tire and Rim Association, Inc., 3200 West Market Street, Suite 304, Akron, OH 44313.)

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

* 2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 First article. When specified (see 6.2), in the contract or purchase order, a sample shall be subjected to first article inspection (see 4.2.1 and 6.4).

3.2 Standard vehicles and accessories. Except as specified herein, vehicle, components, assemblies, and accessories to be delivered under the contract, shall be standard or optional items which meet or exceed the requirements of this specification. Chassis items shall be as represented in the chassis manufacturer's technical data and the body and mounted equipment shall be as represented in the body and the equipment manufacturer's technical data. Technical data shall be limited to specifications and technical material, identical to that furnished to the authorized company representatives for selection of vehicle models and components; and shall be on file in the engineering offices of the procuring activity prior to delivery of the items.

3.2.1 Special requirements. In addition to standard vehicle and components specified in 3.2, vehicle shall be furnished with special equipment as specified herein.

3.2.1.1 Exterior painting and marking. Treatment, painting, identification marking, data plates, and warranty notice shall be in accordance with MIL-STD-1223 as specified for the Navy, except exterior color shall be gloss white No. 17886, in accordance with FED-STD-595. Unless otherwise specified (see 6.2), the following additional markings and exterior colors shall be painted on the vehicle:

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:09Z
Check the source to verify that this is the current version before use.

a. Dark blue exterior color area. Exterior of the vehicle shall be painted dark blue, No. 15050, in accordance with FED-STD-595 as specified herein and indicated in figures 1A and 1B. This area starts at a point immediately to the rear of the driver's door. Bottom line of this area shall be continuously parallel to the vehicle body bottom along the street side, the curb side, and shall end at a point immediately to the rear edge of the copilot's door. The bottom line of this area shall be approximately 2 inches above the rear fender crease area. The upper limit of this area shall begin at the bottom line point and continue diagonally to the drip rail at the rear quarter panel, straight across the back of the vehicle immediately below the trip rail, and diagonally down the curb side to the curb side bottom line point.

b. Red pinstripe. A red pinstripe No. 11105, in accordance with FED-STD-595, shall be painted as indicated in figure 1B. This stripe shall be 1/2-inch wide. The bottom of the stripe shall start 1-1/2 inches above the dark blue area and shall run parallel to the dark blue area ending at the drip rail line. The pinstripe shall be painted on the street side and curb side of the vehicle.

c. Light blue exterior color area. This area shall be painted light blue, No. 15200, in accordance with FED-STD-595 as indicated in figure 1B. The bottom line of this area shall start at the starting point of the upper limit of the dark blue area on the street side of the vehicle, shall continue diagonally to the rear edge of the elevated roof, and shall continue straight across the top of the elevated roof and diagonally down the curb side to the starting point of the upper limit of the dark blue area. The top line of the light blue area shall start at the starting point of the upper limit of the dark blue area on the street side of the vehicle and continue diagonally to a point 2 feet forward of the rear of the elevated roof, straight across the flat of the roof, and diagonally down the curb side to the starting point of the upper limit of the dark blue area.

d. Recruiting command seal. Government-furnished recruiting command seals, 16 inches in diameter, shall be applied at the center of each cab door and the rear of vehicle as indicated in figures 1A and 1B.

e. Lettering. The following lettering style, HELVETICA MEDIUM, shall be painted on the vehicle as indicated in figures 1A, 1B, and 1C.

(1) "GO NAVY."

(a) Side panels. The words "GO NAVY" shall appear on the street and curb side panels in the dark blue area. Lettering shall be white, No. 17886, in accordance with FED-STD-595. Lettering shall be 8 inches high and the bottom of the letters shall be 2 inches above the lower limit of the dark blue area. The lettering shall be spaced, as indicated in figure 1B, from the rear quarter panel to the left-hand edge of the copilot's door. The lettering on the street side of the vehicle shall be identically spaced.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:09Z
Check the source to verify that this is the current version before use.

(b) Elevated roof. The words "GO NAVY" shall appear on the front and rear of the elevated roof as shown in figures 1A and 1C. Lettering on the front and rear of the elevated roof shall be dark blue, No. 15050, in accordance with FED-STD-595. All lettering shall be 6 inches in height. Lettering shall be centered on the front and rear panels and shall be spaced the full width of each panel.

(2) "CALL TOLL FREE." When specified (see 6.2), the words "CALL TOLL FREE" shall be centered across the rear of the vehicle at the vehicle belt line. The lettering shall be white, No. 17886, in accordance with FED-STD-595 and shall be 4 inches high.

(3) Telephone numbers. When specified (see 6.2), telephone numbers shall be spaced across the rear of the vehicle in accordance with figure 1A. Telephone numbers shall be white, No. 17886, in accordance with FED-STD-595, and shall be 6 inches high. The bottom of the letters shall be 2 inches above the bottom line of the dark blue area. Telephone numbers will be furnished by the contracting officer.

f. Identification markings. The identification markings "US NAVY," "FOR OFFICIAL USE ONLY," and "USN REGISTRATION NUMBERS" specified in MIL-STD-1223 for the right and left of the vehicle shall be located on the dark blue area at left and right side rear. Rear marking shall be as specified in MIL-STD-1223 and shall be located on the dark blue area. All markings shall be black paint, No. 17038, in accordance with FED-STD-595.

3.2.1.2 Rustproofing. The vehicle shall be rustproofed in accordance with FED-STD-297.

3.2.1.3 Dissimilar metals. Contact between dissimilar metals likely to cause deterioration of parts by galvanic corrosion shall be avoided. When such contact cannot be avoided, joints between dissimilar metals shall be protected against galvanic corrosion by plating, coating, insulation, gaskets, shall be of the same material as the metals joined or shall be cathodic to the metals joined.

3.2.1.4 Heavy-duty cooling system. A heavy-duty cooling system shall be furnished that shall maintain engine coolant at a temperature below the boiling point with vehicle loaded to rated gvw and operated at an altitude of 10,000 feet above sea level or in an ambient air temperature of not less than 125° Fahrenheit (F).

3.2.1.5 Coolant system. Coolant system shall include a surge tank or a coolant recovery reservoir of not less than 2-quart capacity.

3.2.1.6 Towing devices. Not less than two hooks, loops, or pins for towing vehicle shall be furnished on front of the vehicle.

3.2.1.7 Wheel splash and stone throw protection. All splash shields and rubber mud flap installations, front and rear, shall conform to the rear wheel splash and stone throw protection provisions of SAE J682.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:09Z
Check the source to verify that this is the current version before use.

3.3 General design.

3.3.1 Federal Motor Vehicle Safety Standards. Vehicle shall comply with all Federal Motor Vehicle Safety Standards in effect on the date of manufacture.

3.3.2 Air pollution control. Vehicle shall comply with EPA regulations in effect on the date of manufacture. In addition, vehicle(s) destined for California shall comply with State of California regulations governing air pollution control in effect on the date of manufacture.

3.3.3 Exterior sound level. The vehicle exterior sound level shall conform to the Interstate Motor Carrier Noise Emission Standards of the EPA.

3.3.4 Interior sound level.

3.3.4.1 Driver's area. The interior sound level in the driver's area shall conform to DoT Federal Motor Carrier Safety Regulations, section 393.94.

3.3.4.2 Conference area. When the vehicle is stationary and in operational mode, the average interior ambient noise level at the conference area shall not exceed 84 decibels.

3.3.5 Curb weight. Curb weight shall include the weight of the complete vehicle with all attachments, accessories, and installed equipment as specified herein: full complement of fuel, lubricants, and coolant.

3.3.6 Payload. The payload shall consist of two people whose individual weight shall be computed at 175 lbs each and a payload of 750 lbs. The sum of the payloads shall be computed as being equally distributed on the floor area of the vehicle.

3.3.7 Gross vehicle weight. The gvw shall include the curb weight and the payload.

3.3.8 Ratings. Vehicle ratings shall be the manufacturer's published rating. Component and vehicular ratings shall not be raised to meet the requirements of this specification.

3.3.9 Dimensions and clearances. The vehicle dimensions and clearances shall conform to table I.

TABLE I. Dimensions and clearances.

Description	Dimension (inches)
Overall height, not more than	108 (not including air conditioner height)
Overall length, minimum	196
Overall width, not more than	94.5
Interior height, not less than	76
Axle wheelbase, not less than	137
Ground clearance under axles, not less than	7

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:09Z
Check the source to verify that this is the current version before use.

3.3.10 Construction. General construction, body design, and installation of equipment shall be in accordance with applicable portions of NFPA No. 501C.

3.4 Performance.

3.4.1 Speeds and gradeability. Speed and gradeability requirements shall be met with the vehicle loaded to specified gvw (see 3.3.7).

3.4.1.1 Low speed. Low speed shall be calculated with engine operating at not less than 35 percent of the engine manufacturer's recommended governed speed, and shall provide a low vehicle speed not greater than 5 miles per hour (mph).

3.4.1.2 Maximum geared speed. Maximum geared speed at engine governed speed shall be not less than 65 mph.

3.4.1.3 Gradeability. High and low speed gradeability requirements shall be met as specified herein. Vehicle shall ascend a continuous grade of 1.5 percent at 55 mph. High speed gradeability requirements shall be met with the transmission in direct drive. Vehicle shall also ascend grades of at least 10 percent at a speed of at least 15 mph in lower speed gear.

3.4.2 Brake performance. Service brakes shall comply with the performance requirements specified in DoT Federal Motor Vehicle Safety Standard 105. Service brakes shall control and hold the vehicle, loaded to the rated gvw, on a 30 percent grade. Parking brake shall hold the vehicle loaded to the rated gvw, headed either up or down the grade, without slipping on a 30 percent grade.

3.5 Chassis components.

* 3.5.1 Gasoline Engine. Unless otherwise specified (see 3.5.1.1), the vehicle shall be equipped with a gasoline engine. The engine furnished shall be the manufacturer's standard or optional engine for the commercial model vehicle which meets or exceeds the requirements of this specification. The engine shall be liquid cooled, internal combustion, four-stroke cycle, gasoline engine with not less than eight cylinders and a minimum 350 cubic inch displacement. The engine furnished shall produce the required vehicle performance when operated on unleaded fuel with a research octane rating of 91 and at engine speed not more than manufacturer's recommended operating speed. The rated net torque output of the engine shall be not less than 295 pound-force feet.

* 3.5.1.1 Diesel engine. When specified (see 6.2), the vehicle shall be equipped with a liquid cooled, compression ignition, two-stroke or four-stroke cycle diesel engine, with not less than six cylinders. Engine net horsepower used in performance prediction calculations shall be determined in accordance with SAE J1349.

3.5.1.2 Oil filter. Full flow throwaway type oil filter shall be furnished.

3.5.1.3 Radiator fill neck. Radiator fill neck shall be accessible to the operator when standing on the ground surface at the front of the vehicle.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:09Z
Check the source to verify that this is the current version before use.

3.5.1.4 Oil filler. The engine manufacturer's standard oil fill tube and oil level dipstick shall be furnished and located in the engine compartment. These components shall be readily accessible, when standing on the ground surface at the front of the vehicle, for checking oil level and adding crankcase oil.

3.5.2 Electrical systems. Electrical systems shall be in accordance with DoT Federal Motor Carrier Safety Regulations, sections 393.27 through 393.31, and 393.33.

* 3.5.2.1 Electromagnetic Radiation Suppression. Vehicle chassis shall be suppressed to limit electromagnetic radiation in accordance with SAE J551.

3.5.2.2 Ignition system. A 12-Volt (V) direct current (dc) ignition system shall be furnished. An alternator of not less than 60 ampere (A) rated capacity and which provides not less than 7A dc output at normal engine idle speed shall be furnished.

3.5.2.3 Batteries. A 12V dc battery shall be furnished having a minimum capacity of 90A hours at a 20-hour rate and 460A cold cranking capacity. An auxiliary 12V dc battery, deep-cycle type similar or equal to Gould type AP105AH, shall be furnished complete with a dual battery isolation system.

3.5.2.4 Exterior lighting. All vehicle (chassis and body) lights, reflectors, and wiring shall be as specified herein and shall conform to DoT Federal Motor Vehicle Safety Standard 108. Chassis electrical system shall be 12V dc. Body electrical system shall be as specified herein. Lights and reflectors shall not be mounted on rub rails or vehicle bumpers. A rear mounted, illuminated, license plate holder shall be provided. Two backup lights shall be provided at rear of vehicle.

3.5.2.4.1 Turn signals. Turn signal lamps shall conform to SAE J588, class A. Operating units shall conform to SAE J589, class A, and shall be mounted on the steering column. Operating units shall be provided with a visible and audible flash indicator. Turn signals shall be of the self-canceling type.

3.5.2.4.2 Emergency flashers. Vehicle shall be provided with four-way emergency flashers with a visible and audible flash indicator. Emergency flashers shall be operable with ignition switch "ON" or "OFF".

3.5.2.4.3 Lighting socket. An automotive trailer type lighting socket and cover assembly, conforming to SAE J895, shall be installed in a readily accessible location at the rear of the coach. The receptacle shall be wired to permit operation of all exterior lights on a towed trailer from the vehicle electrical system. All wires shall be loomed and secured to prevent chafing and abrasion.

3.5.3 Fuel system. Fuel system shall conform to DoT Federal Motor Vehicle Safety Standard 301.

* 3.5.3.1 Air cleaner. Manufacturer's standard dry type air cleaner shall be furnished.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:09Z
Check the source to verify that this is the current version before use.

3.5.3.2 Fuel tank. The capacity of the fuel tank shall be not less than 25 gallons. A fuel gauge for the tank shall be installed in the cab on the instrument panel. The access for the tank filler neck shall be designed to prevent the entry of spilled fuel to any point inside the exterior body panel. Sealing may be accomplished by use of a neoprene rubber thimble or grommet or other device installed in the access hole. A key-operated fuel tank cap shall be provided.

3.5.4 Exhaust system. The vehicle exhaust system conforming to DoT Federal Motor Carrier Safety Regulations, section 393.83, shall be substantially constructed, effectively leak proof, and quiet in operation. Properly supported tailpipe shall extend to the rear bumper and shall be located to properly and effectively minimize the possibility of exhaust fumes entering the body. The exhaust system shall include muffler(s). The exhaust system beyond the engine compartment shall be insulated from the fuel tank and tank connection by securely attached metal shields at any point where it is 12 inches or less from the fuel tank, tank connection, fuel line connections, or battery box.

3.5.5 Automatic transmission. Manufacturer's standard automatic transmission recommended for the make and model van shall be provided. Transmission shall provide required performance under all normal operating conditions and under all conditions specified herein. Transmission shall include a torque converter and have not less than three forward speeds and one reverse speed.

3.5.6 Drive line components. Drive line components shall be adequate to transmit the maximum delivered torque of the engine, as developed through the maximum gear train reduction. Propeller shaft guards shall be provided in accordance with DoT Federal Motor Carrier Safety Regulations, section 393.89.

3.5.7 Frame. Chassis frame shall be the manufacturer's standard for the type and size of vehicle furnished and shall be adequate for mounting the body and equipment specified herein. Frame shall be lengthened or shortened to the required body length to provide support for all body cross members. Frame modifications shall be as recommended by the chassis manufacturer for the body builders layout.

3.5.8 Suspension. Vehicle shall be equipped with suspension system components having a rated capacity at least equal to the load imposed on each member, measured at the ground, with vehicle loaded to specified gvw. Rear wheels shall be designed and located such that there will be no interference with the use of tire chains. Vehicle shall be equipped with a hydraulic, double acting, shock absorber at each wheel. Vehicle shall be furnished with spring or air suspension. Rear axle stabilizer bar shall be heavy-duty type. Front axle stabilizer bar shall be heavy-duty type when normally furnished.

3.5.9 Axles. Axle ratings shall be at least equal to the load imposed on each axle, measured at the ground, when vehicle is loaded to specified gvw.

3.5.10 Wheels, rims, and tires. Vehicle shall be equipped with single front and dual rear wheels. Rim and tire ratings shall conform to TRA recommendations for the type and size of tires furnished. Tire, rim, and disk wheel sizes shall be the same for all wheels.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:09Z
Check the source to verify that this is the current version before use.

3.5.10.1 Tires. Steel-belted radial tires shall be furnished. Tires shall be tubeless type with highway tread. Tires shall be of a rated capacity at least equal to the load imposed on each tire, measured at each wheel, at the ground, with the vehicle loaded to specified gvw.

3.5.10.2 Balancing. Each tire shall balance within practicable limits. Wheels, hubs, and brake drums shall be effectively in balance. Balancing shall be adequate to preclude wheel shimmy at all effective speeds.

3.5.10.3 Spare wheel assembly. A spare wheel assembly shall be mounted on a rear carrier and installed in a readily accessible location. Carrier design shall enable removal or mounting of spare wheel assembly using only the tools specified in 3.5.16. Spare wheel shall be the same as mounted on the front and rear axles.

3.5.10.4 Spare tire. An inflated spare tire, mounted on the spare wheel, shall be furnished. The spare tire shall be of the same size, tread design, and ply rating furnished on the vehicle. A tire cover shall be furnished if spare tire is mounted on exterior of vehicle body.

3.5.11 Brakes. Brakes shall conform to DoT Federal Motor Vehicle Safety Standard 105.

3.5.11.1 Service brakes. Vehicle shall be equipped with power-assisted, hydraulic-actuated, four-wheel service brakes. Front wheels shall be furnished with disk brakes.

3.5.11.2 Parking brake. Vehicle shall be equipped with the manufacturer's standard parking brake. Parking brake performance shall be in accordance with 3.4.2.

3.5.12 Horn. Manufacturer's standard electric horn shall be provided.

3.5.13 Steering. Power-assisted steering shall be furnished.

3.5.14 Windshield wipers and washers. Vehicle shall be equipped with dual windshield wipers. Wiper system furnished shall be two-speed type and shall sweep the maximum practicable area of windshield surface. Windshield washers shall be provided.

3.5.14.1 Windshield and windows. Tinted safety glass windshield and windows shall be furnished.

3.5.15 Bumpers. Manufacturer's standard front bumper shall be provided. Rear bumper shall conform to DoT Federal Motor Carrier Safety Regulations, section 393.86.

3.5.16 Tools. Vehicle shall be furnished with tools required for exchanging mounted tire assembly with a spare wheel assembly (see 3.5.10.3) and shall include as a minimum: hydraulic jack, jack handle, and wheel nut wrench. The jack shall be of such closed height as to permit its location under axle, or other satisfactory lift point, at any wheel with the tire flat. The jack, without blocking, shall be capable of raising any wheel of loaded vehicle to a height adequate to permit removal and replacement of wheel and tire assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:09Z
Check the source to verify that this is the current version before use.

3.5.16.1 Tool stowage compartment. Stowage space of sufficient size to accommodate vehicle jack, hand tools, highway warning kit, and electrical lead-in cable, shall be furnished for retaining equipment when the vehicle is in transit. Electrical lead-in cable shall be protected from damage when in the stowage compartment. When stowage compartment is accessible from outside of the vehicle, it shall be waterproof and shall provide for locking.

3.5.17 Trailer hitch. The manufacturer's standard trailer hitch shall be furnished. The hitch shall conform to SAE J684 for class 3 nonpassenger carrying trailers (3,500-5,000 lbs).

3.5.18 Controls and operating mechanism. Controls and operating mechanisms shall be located for left-hand drive. Controls shall be complete and conveniently operable by the driver when in a seated position. Controls shall be designed and located to permit easy entrance and exit of operator to and from driver's seat. Instruments and controls shall be identified as to their function and installed in a manner to facilitate removal and servicing. Instruments shall be panel mounted and be clearly visible to the driver when seated in normal driving position.

3.5.19 Heating, defrosting, ventilating, and cooling. Heating, ventilating, and cooling system shall conform to DoT Federal Motor Carrier Safety Regulations, sections 393.77 and 393.79, and the defrosting system shall conform to DoT Federal Motor Vehicle Safety Standard 103.

3.5.19.1 Heater and defroster. The manufacturer's standard hot water heater and defroster shall be provided. The heater shall have fresh air intakes. Discharge outlets shall be provided to direct heated air to floor and to defroster louvers. Heater shall be complete with blower and mounted controls convenient to the driver. An engine-heated water station shall be installed at the back of the vehicle in the conference area as indicated in figure 2A.

3.5.19.2 Cooling. The driver's compartment shall be equipped with manufacturer's standard air conditioning system. The air conditioner compressor shall be driven by the vehicle engine. Controls shall be complete and conveniently operable by the seated driver.

3.5.20 Accessories and equipment. Chassis equipment shall be complete with all accessories furnished as standard equipment by the manufacturer. The following minimum equipment shall be furnished:

a. Key-operated ignition switch.
b. Ammeter.
c. Fuel gauge.
d. Oil pressure gauge.
e. Engine temperature gauge.
f. Speedometer.
g. Recording odometer.
h. Headlight high beam indicator light.
i. Inside rearview mirror.
j. Ash receptacle.
k. Cigar lighter.
l. Driver's compartment dome light.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:09Z
Check the source to verify that this is the current version before use.

m. Two map reading lamps, one each in the vicinity of the driver and copilot seat, individually controlled by an ON/OFF switch.
n. Dual sun visors.

3.5.21 Rearview mirrors. Outside rearview mirrors shall be mounted on each side of the vehicle. The mirrors shall be combination (flat and convex) mirrors, enclosed in a common housing. Each combination mirror shall have at least 50 square inches of flat reflective area and a convex surface having at least 20 square inches of reflective area.

3.6 Body construction. The vehicle shall have frame and body shell integrated with a welded box steel subchassis and front cockpit cage. The body steel subchassis shall be bolted to the frame (see 3.5.7).

3.6.1 Subchassis. Subchassis construction shall consist of not less than three longitudinal main support members of seamless or welded rectangular sections which are passed through cross members. At points of intersection, the main support and cross members shall be welded to form a unit. Subchassis shall be incorporated with underbelly, insulation (see 3.6.2.4) and not less than 5/8-inch exterior grade plywood floor.

3.6.2 Body framing structure. Body framing structure shall be as specified herein. The structure shall be constructed to preclude buckling of the skin sheets when vehicle is operating under the intended service. All exterior door(s), windows, and other cutouts shall be reinforced. Materials shall be free from any defects that will affect performance or appearance. Aluminum shall have corrosion-resistant properties inherent in the chemical composition of the aluminum.

3.6.2.1 Body exterior. Body exterior side panel shall be of not less than 0.040-inch aluminum alloy or 0.0359-inch zinc-coated steel or not less than 1/8-inch bonded laminated fiberglass. Molded fiberglass may be used for rocker panels.

3.6.2.2 Roof panel. Body roof panel shall be the manufacturer's standard one piece seamless construction with steel framing.

3.6.2.3 Body framing components. Body framing components shall be fastened together in a manner which will preclude loosening of bolts, screws, and rivets, as well as cracking of welded joints when the vehicle is properly maintained and operated under the intended service conditions. Fasteners shall be compatible to the metal being secured. Fasteners shall be sealed before employment. Self-tapping screws shall not be used in areas subjected to stress and wood shall not be utilized for structural framing.

3.6.2.4 Insulation. The body shall be insulated on sides, ends, ceiling, and floor with fire-retardant insulation to meet the interior sound and thermal requirements as specified herein. Insulation shall not support combustion, sustain flame or vermin, corrode metals, or absorb odors. It shall not mold or rot and shall be essentially odorless. Insulation shall not disintegrate under vibration or settle and leave voids. Means shall be provided to drain condensation to ground. The insulating material density shall be such as to maintain inside temperatures at 68° to 78°F, with outside ambient temperatures of 0° to 110°F.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:09Z
Check the source to verify that this is the current version before use.

3.6.2.5 Waterproofness. The vehicle shall be leakproof to preclude entrance of water.

3.6.3 Interior layout. General interior layout of the vehicle shall be similar to that shown in figures 2A, 2B, 2C, and 2D. Items which are included as requirements and not shown in figures shall be arranged in an appropriate location for easy access and convenience of operation in accordance with manufacturer's normal practice.

3.6.3.1 Interior construction. Interior walls and cabinets shall be covered in accordance with the body manufacturer's published product specifications for the vehicle being furnished. The ceiling shall be lined with off-white acoustic tile, similar or equal to FISSURA 55-012 acoustic tile, manufactured by Conwed Corporation of St. Paul, MN, or off-white prefinished vinyl-laminated plywood. The entire interior surface of the floor and step areas shall be covered with rubber foam back, high grade industrial, indoor-outdoor type carpeting. The carpeting shall be similar or equal to Viking Paragon and the color shall be PN36 Mocha Blue. The tables and desk (items 2, 5, and 21 of figures 2A, 2B, 2C, and 2D) shall be white Formica with leather grain or other pattern approved by the contracting officer. All edges shall be covered with Formica and beveled. All equipment furnished shall be provided with a means for securing during vehicle over-the-road travel.

3.6.4 Rear door. The vehicle shall be provided with a rear entrance door. Location may be as shown in figure 1B or in accordance with the manufacturer's standard design. The door shall be of the manufacturer's standard size and be provided with weatherproof, nonabsorbent, light-tight, rubber-sealing gaskets. The rear door shall be furnished with a full length screen door or a sliding window with removable screen. The window shall be fitted with tinted safety glass. The door shall be fitted with corrosion-resistant hardware including locks and latches with outside and inside handles. The manufacturer's standard door access steps shall be provided.

3.6.5 Windows. A tinted safety glass side window shall be located on the street side of the conference area. Window location shall be approximately as indicated in figure 2B. The manufacturer's standard rear window shall be provided for rearward observation by the driver. All windows shall be provided with window drapes in a color similar or equal to blue, No. 15200 of FED-STD-595. Either the rear window or side window shall be readily accessible for emergency exit use.

3.6.6 Driver's compartment. A driver's compartment shall be provided. The driver's compartment shall consist of the vehicle operating controls, driver's seat, copilot seat, and as a minimum, equipment specified herein. The manufacturer's standard safety and convenience features normally provided shall be included unless specifically excluded by this specification. Carpeting shall be provided and shall be of the same type and color as specified in 3.6.3.1. The floor area in front of the driver's and copilot's seat, although carpeted, shall be provided with a fixed mat or corrosion-resistant scuff plate.

3.6.6.1 Driver's seat. Driver's seat shall be heavy duty, bucket type, adjustable fore and aft and for height without the use of tools. Seat shall be positioned for convenient and safe operation of all controls by the driver. The

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:09Z
Check the source to verify that this is the current version before use.

seat and back shall be substantially constructed and provided with tilting adjustments for cushion and back to provide maximum driver comfort. Arm rests shall be provided on both sides of the driver's seat.

3.6.6.2 Co-pilot seat. The copilot seat shall be similar to the driver's seat.

3.6.6.3 Seat restraints. As a minimum, manufacturer's standard fastening devices, seat belts, and retractors shall be furnished and installed for the driver's seat, copilot seat, and the captain chairs in the conference area, except that retractors will not be required on the captain chairs.

3.6.6.4 Accessibility. Access to all seats shall be designed for comfort and convenience.

3.6.6.5 Engine cover. The engine cover located in the driver's compartment shall be fully insulated, soundproofed, and carpeted. Manufacturer's standard seat accessory tray shall be located on top of the engine cover.

3.6.6.6 Radio. A manufacturer's standard vehicle radio with antenna shall be provided in the driver's compartment. The radio shall be an AM/FM pushbutton type. The antenna shall be installed in accordance with the manufacturer's standard in order to provide maximum clarity and fidelity. Two high fidelity flush-mounted, 4-inch (minimum) speakers shall be provided with one located in the driver's area and one located in the copilot's area.

3.6.7 Recruiting area. The recruiting area shall consist of a conference area with storage provisions. These areas shall be configured approximately as illustrated in figures 2A, 2B, 2C, and 2D.

3.6.7.1 Conference area. The conference area shall be used for applicant interviewing and counseling. The conference area shall consist of one drop table (for projector), one pedestal table (removable), four captain style chairs, literature rack, work desk, and overhead storage areas.

3.6.7.1.1 Captain chairs. The manufacturer's standard captain chairs shall be provided. Chairs shall be suitably padded and covered with off-white commercial grade Naugahyde. Chairs shall be affixed to the van body subchassis and the chair base shall provide a minimum 180° axle rotation. Chairs shall be capable of locking for travel mode while facing forward and rearward.

3.6.7.1.2 Work desk. A built-in work desk 40 inches long by 24 inches wide and 30 inches high shall be provided. The work desk shall be located longitudinally on the street side at the rear of the coach as indicated in figure 2B. The desk shall convert from a work desk to a typing desk by means of a pullout shelf. One drawer and one typewriter storage compartment shall be provided. For design purposes, a typewriter of 7.25 inches high, 15.2 inches deep, and 15.5 inches wide should be assumed. The work desk shall be constructed of 3/4-inch exterior plywood and covered with walnut Formica. The desk top and edges shall be covered with white Formica with leather grain, and shall have rounded corners. One 12V alternating current (ac) 3-wire grounding duplex convenience receptacle shall be provided and installed at the desk area.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:09Z
Check the source to verify that this is the current version before use.

One 12V dome light with rocker switch shall be provided under the overhead storage cabinets over the work desk. The light shall be connected to the 12V dc lighting system.

3.6.7.1.3 Pedestal table. A removable pedestal table approximately 38 inches in diameter, equipped with a detachable leg and flush recessed base shall be mounted in front of and centered about the captain chairs. The table top shall be constructed of 3/4-inch exterior grade plywood and covered with white Formica with leather grain including edges. Table height shall provide clearance for chair arms and provide for a comfortable writing position. Means to secure the table for travel shall be provided and installed in accordance with figure 2B.

3.6.7.1.4 Projector table. The projector table shall be a dropleaf type located on the street side wall opposite the projection screen in accordance with 3.6.7. Table height shall be 30 inches (nominal). Table top shall be constructed of 3/4-inch exterior grade plywood covered with white Formica, with leather grain including edges, and shall have rounded corners. Table top size shall be 24 inches wide and 20 inches deep (nominal) and adequate to fully support an 8-millimeter reel-to-reel projector. Table shall swing down to store for travel mode.

3.6.7.1.5 Projection screen. One projection screen shall be furnished and installed. The screen shall be translucent for exterior viewing and shall be provided with an external weatherproof cover. The screen shall be 24 inches by 36 inches and shall be similar or equal to Polacoat Rigid Lenscreen. The screen shall be installed on the curb side of the body at the location indicated in figures 1B, 2A, and 2C. The manufacturer shall furnish and install an externally mounted, hinged, weathertight protective cover. Means shall be provided to retain the cover in the fully opened position as well as fastening devices to retain the cover in the travel position. Corrosion-resistant hinges and hardware shall be provided for the protective cover. The screen shall be so located that the internally mounted projector can be mounted at the opposite wall in a direct line with the screen.

3.6.7.1.6 Overhead storage cabinets. Overhead storage cabinets shall be provided and, as a minimum, shall be located across the rear of the vehicle. The design and finish of the cabinets shall be in accordance with the body manufacturer's standard practice. The design and locations of overhead cabinets shown in figures 2B, 2C, and 2D are for informational purposes and are not mandatory.

3.6.7.1.7 Literature racks. Literature racks shall be furnished and located as indicated in figures 2A, and 2C. Literature racks shall be attached to cover the projection screen by a continuous piano hinge. Racks shall be not less than 2-1/2 inches deep and shall be suitable for containing 9-inch by 12-inch brochures. Racks shall be covered with walnut Formica. The literature racks shall be positive latching for travel mode.

3.6.7.1.8 Curtain. A drawn curtain shall be provided to section the conference area from the driver/copilot area. A curtain track shall be provided at the ceiling for drawing the curtain. The curtain shall be made of

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:09Z
Check the source to verify that this is the current version before use.

fire-resistant material, either nylon or polyester. A tie strap shall be provided to hold the curtain in the retracted position. The color of the curtain shall be similar or equal to blue, No. 15050 of FED-STD-595.

3.6.7.1.9 Sound system. The contractor shall furnish, install, and wire the sound system components specified herein. Two sound system jacks (phone type), one for left channel and one for right channel, shall be provided at the projection table as specified in figure 2A. The jacks shall be designated for the external speakers (Government-installed) which will be used as a public address system and in conjunction with the outside viewing screen. The external speakers shall be mounted on the curbside in the approximate location shown in figure 1B. A speaker mounting fixture shall be provided so as to permit attachment of the speaker without tools. Manufacturer's standard external speaker fixtures are acceptable if provided in the area desired. Weatherproof speaker jacks shall be provided and installed in the area of the speaker mounting fixture.

3.6.7.1.10 Electric heater. One or more electric heaters having a combined rating of at least 1,500 watts shall be furnished. The heater(s) shall be of the thermostatically controlled, forced-air type and shall be installed in the conference area in a location determined by the contractor to provide satisfactory heat distribution in the area being served.

3.6.8 Roof-mounted air conditioner. Air conditioning for the vehicle shall be provided by one roof-mounted air conditioning unit in accordance with the manufacturer's standard practice. An air conditioner, having a minimum rated capacity of 11,000 British thermal units per hour, and a full load current less than 12A at 120V shall be furnished. Drainage from the air conditioner to the ground shall be provided.

3.6.9 Roof vent. A static exhaust roof ventilator shall be furnished and installed on the longitudinal roof centerline and centrally located to the rear of the air conditioner. Vent shall be provided with a weatherproof cover with means for opening and closing the opening from inside the vehicle. The vent opening shall be screened.

3.6.10 Awning. A permanently installed rollup awning shall be provided. The awning shall be located on the curb side and shall cover, as a minimum, an area beginning at the rear edge of the copilot side entrance door to the rear end of the van. When in the rolled out position, the awning shall extend a minimum of 8 feet from the van proper. Awning material shall be mildewproof and water-repellant. The awning color shall be blue with gold trim. Awning stowage container shall be permanently mounted at the roof line.

3.6.11 External receptacles. Two weatherproof duplex grounding 120V receptacles, having ground fault circuit protection, shall be furnished on the exterior curb side of the vehicle as indicated in figure 1B. All external receptacles shall have marking plates identifying the voltage and amperes available at the receptacle. The receptacles shall be located as shown in figure 1B.

3.7 Body electrical system. The recruiting van body electrical system shall be in accordance with NFPA No. 501C and SAE J1292. All electrical equipment, receptacles, and lighting furnished (except as noted) shall be connected to the

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:09Z
Check the source to verify that this is the current version before use.

120V, 60 Hertz (Hz), 3-wire, grounded, single-phase power provided by the auxiliary generator or local power source via lead-in cable. All wiring and equipment shall be provided with overcurrent circuit breaker protection. Provisions shall be made for spare circuits. All distribution wiring shall be adequately supported and protected with grommets wherever passing through paneling, sheet metal, supports, or framework. Electrical loads shall be balanced as close as practicable. Wiring shall be concealed, yet easily accessible for repairs. Electrical equipment, lighting, heating, cooling, and ventilation system shall be selected for minimum amperage draw, where practical and consistent with specified requirements. A main distribution panel shall be provided and shall be installed in the coach and located to provide ready accessibility. All circuits shall be properly identified. A grounding cable and suitable grounding rod shall be furnished for grounding the electrical system. A portable power cable, 25 feet long, NEMA type G, 3 conductor, No. 10 AWG, conforming to NEMA WC 3 shall be furnished for supplying external power to the coach. The cable shall have a plug on one end and be permanently wired to the distribution panel. The plug shall conform to W-C-596 and NEMA WD 5. A storage cabinet shall be provided for the power cable. A marking plate shall be provided in accordance with paragraph 4.7.9.4 of NFPA No. 501C.

3.7.1 Receptacles and plugs. All 120V system receptacles and plugs shall be 2-pole, 3-wire, 15A, 125V, grounding type, conforming to W-C-596, W-C-596/12, and W-C-596/13, as applicable. A total of five duplex, hospital grade, convenience receptacles shall be provided and located as follows:

a. One adjacent to the projection table.
b. One located on the side wall below the projection screen.
c. One in the conference area adjacent to desk as shown in figure 2B.
d. Two, ground fault circuit protected, on the exterior curb side of the vehicle.

3.7.2 Lights (12V). A 12V dc lighting system shall be provided for the vehicle. The system shall consist of dome lights located as indicated in figure 2A. Each dome light shall be furnished with an integral switch. In addition, one switch shall be furnished and located immediately inside the rear access door to operate at least one dome light.

3.7.3 Power converter. An automatic power converter, complete with 12V dc battery charger, shall be furnished. The power converter shall convert 120V ac from external power source to 12V dc. The power converter shall be of adequate capacity for all the 12V requirements specified herein.

3.7.4 Distribution panel (12V). A distribution panel for the 12V electrical system shall be furnished. This panel shall be rated for not less than 30A. The panel shall be equipped with automatic circuit breakers and shall be grounded. The panel shall be provided with a hinged cover.

3.7.4.1 Receptacle (12V). A 12V dc receptacle shall be provided adjacent to the 120V ac receptacle at the projection table area. This receptacle shall have overcurrent protection provisions and shall be wired to a dedicated 20A, 12V circuit from the distribution panel (see 3.7.4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:09Z
Check the source to verify that this is the current version before use.

3.7.5 Split power distribution. A split power distribution system shall be provided. The system shall provide a self-contained generator system and local power provided by a 120V, 60-Hz, 3-wire grounded power cable and duplex adapter. Change over from generator power to shore power shall be provided via manual switch, cord duplex set, or automatic changeover to preclude energizing dual power source. All systems shall be clearly marked to provide safe operating procedures.

3.7.5.1 Distribution panel (120V). A single-phase, 3-Wire, 120V distribution panel for the 120V electrical system shall be furnished. The panel shall be rated for not less than 60A. The panel shall be equipped with automatic circuit breakers and shall be grounded. The panel shall be provided with the following minimum circuits:

a. One circuit for the electric heater and air conditioner when furnished as a combined unit.
b. Two separate circuits for electric heater and air conditioner when furnished separately.
c. Power converter circuit.
d. Duplex receptacles on two circuits.

The panel shall be provided with a hinged cover. All circuit breakers shall be permanently and legibly identified to which functions they control. This identification for marking shall be either on the breaker panel or inside the distribution panel cover.

3.7.6 Auxiliary generator set. A remote start, minimum 4 kilowatt, vacu-flo or air-vac type, air cooled, four-stroke-cycle gasoline-engine-driven, 120V ac, single-phase, 60-Hz, 1,800 revolutions per minute (rpm) generator set shall be provided. The generator set shall be capable of furnishing continuously sufficient power to operate simultaneously all electrical equipment at maximum design loads as tested in 4.4.6. The auxiliary generator shall provide 120V ac power to the duplex receptacles specified, the electric heater, power converter, the roof air conditioner, and the sound system. The auxiliary generator shall have a separate battery-charging circuit. Shock mounts, having an adequate safety factor, shall be provided under the generator. Means of monitoring the voltage, cycle, and elapsed running time for the power plant shall be provided at the driver's console. The auxiliary generator is to be installed in a compartment in a manner to expedite maintenance and servicing. The generator set shall be suppressed to limit electromagnetic radiation in accordance with SAE J551. Generator compartment door shall have a key type lock and shall have means for holding in the open position. The auxiliary generator compartment air cooling system shall be baffled to prevent entrance of water and undesirable environmental contaminants. An emergency fire extinguisher shall be installed in the generator compartment.

3.7.6.1 Control panels. The auxiliary generator control panels shall be located on the auxiliary generator set and in the driver's compartment. Each control panel shall include start/stop controls. A safety shutdown warning light shall be installed on the control panel in the driver's compartment.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:09Z
Check the source to verify that this is the current version before use.

3.8 Safety. All equipment or exposed portions of the equipment which are subject to extreme temperatures or inclement weather, and all rotating or reciprocating parts which are of such nature or located as to become a hazard to operating personnel, shall be insulated, fully enclosed, shielded, or properly guarded.

3.8.1 Fire extinguisher. Three type I, size 10, carbon dioxide type fire extinguishers conforming to O-E-910 shall be furnished and located as specified herein. One extinguisher shall be installed in the driver's compartment, one in the conference area adjacent to the rear entrance door, and one in the generator compartment. Vehicle mounting brackets shall be furnished for each extinguisher.

3.8.2 Highway warning kit. Highway warning kit shall be furnished. Highway warning kit shall conform to applicable portions of Federal Motor Carrier Safety Regulation, section 393.95. Kit shall be stowed in the tool stowage compartment.

3.9 Transit requirements. All equipment and accessories in the vehicle, including doors and drawers, shall be provided with means for securing during transit of unit to prevent movement and damage.

3.10 Hardware. All hardware, such as locks, grab handles, and hinges shall be of the best quality, heavy duty, rustproof, and of a design consistent with the vehicle's overall appearance. All locks on the vehicle shall be operable with the same key and not less than five keys shall be furnished with each vehicle.

* 3.11 Lubrication. Means for lubrication shall be in accordance with the manufacturer's standard practice. The lubricating points shall be easily visible and accessible. Hydraulic lubrication fittings shall be in accordance with SAE J534. Where use of high pressure lubricating equipment, 1,000 pound-force per square inch (psi) or higher, will damage grease seals or other parts, a suitable warning shall be affixed to the equipment in a conspicuous location.

3.12 Servicing and adjustment. Prior to acceptance of the vehicle by the Government inspector, contractor shall service and adjust each vehicle for operational use including at least the following: focusing of lights; adjustment of the engine and accessories; adjustment of electrical and braking systems; charging of battery; alignment of front wheels; inflation of tires; complete lubrication of engine, chassis, and operating mechanisms, with grades of lubricants recommended for the ambient air temperature at the delivery point; servicing of liquid cooling system with a solution of equal parts of ethylene glycol and water; and servicing windshield washer reservoir with water and appropriate additives. In addition, complete servicing of all body interior electrical, heating, and air conditioning systems. Engine dipstick shall be tagged to identify the type and grade of lubricating oil installed. The vehicle shall be conspicuously tagged to identify all lubricants and their temperature range.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:09Z
Check the source to verify that this is the current version before use.

3.13 Instruction plates. The vehicle shall be equipped with instruction plates, suitably located, describing any special or important procedure to be followed in operating and servicing the equipment. Plates shall be of a material which will last and remain legible for the life of the equipment. Plates shall be securely affixed to the vehicle.

3.14 Identical items. All vehicles of the same classification furnished under any specific contract shall be physically and mechanically identical. This requirement includes parts, assemblies, components, and accessories. No deviation will be acceptable without prior written approval of the contracting officer.

3.15 Workmanship.

3.15.1 Steel fabrication. The steel used in fabrication shall be free from kinks, sharp bends, and other conditions which would be deleterious to the finished product. Manufacturing processes shall not reduce the strength of the steel to a value less than intended by the design. Manufacturing processes shall be done neatly and accurately. All bends shall be made by controlled means to ensure uniformity of size and shape.

3.15.2 Bolted connections. Boltholes shall be accurately punched or drilled and shall have the burrs removed. Washers or lockwashers shall be provided in accordance with good commercial practice, and all bolts, nuts, and screws shall be tight.

3.15.3 Riveted connections. Rivet holes shall be accurately punched or drilled and shall have the burrs removed. Rivets shall be driven with pressure tools and shall completely fill the holes. Rivet heads, when not countersunk or flattened, shall be of approved shape and of uniform size for the same diameter of rivet. Rivet heads shall be full, neatly made, concentric with the rivet holes, and in full contact with the surface of the member.

3.15.4 Welding. Welding procedures shall be in accordance with a nationally recognized welding code. The surface of parts to be welded shall be free from rust, scale, paint, grease, or other foreign matter. Spot, tack, or intermittent welds for strength will not be permitted. Weld penetration shall be such as to provide transference of maximum design stress through the base metal juncture. Fillet welds shall be provided when necessary to reduce stress concentration.

3.15.5 Castings. All castings shall be sound and free from patching, misplaced coring, warping, or any other defect which reduces the castings ability to perform its intended function.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:09Z
Check the source to verify that this is the current version before use.

The Government reserves the right to perform any of the inspections set forth in this document where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspection set forth in this document shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in this document shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.1.2 Component and material inspection. Components and materials shall be inspected in accordance with all the requirements specified herein and in applicable referenced documents.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.2.1).
b. Quality conformance inspection (see 4.2.2).

4.2.1 First article inspection. The first article inspection shall be performed on one vehicle when a first article is required (see 3.1 and 6.2). This inspection shall include the examination of 4.3 and the tests of 4.4. The first article may be either a first production item or a standard production item from the supplier's current inventory provided the item meets the requirements of the specification and is representative of the design, construction, and manufacturing technique applicable to the remaining items to be furnished under the contract.

4.2.2 Quality conformance inspection. The quality conformance inspection shall include the examination of 4.3, the tests of 4.4, and the packaging inspection of 4.5.

4.3 Examination. Each van shall be examined for compliance with the requirements specified in section 3 of this specification. Any redesign or modification of the contractor's standard product to comply with specified requirements, or any necessary redesign or modification following failure to meet specified requirements shall receive particular attention for adequacy and suitability. This element of inspection shall encompass all visual examinations and dimensional measurements. Noncompliance with any specified requirements or presence of one or more defects preventing or lessening maximum efficiency shall constitute cause for rejection.

4.4 Tests. The first article shall receive the tests of 4.4.1 through 4.4.6. Each production unit shall receive the tests of 4.4.4 through 4.4.6. Failure to pass any test shall constitute cause for rejection.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:09Z
Check the source to verify that this is the current version before use.

4.4.1 Vehicle weight. The vehicle shall be weighed to determine curb weight and distribution of curb weight on front and rear axle. The imposed loading on front and rear axle will be computed using the curb weight and the payload (see 3.3.7) to provide the specified gvw. The calculated imposed loads on front and rear axles will be utilized to ascertain that the suspension, axles, and tires furnished are of adequate capacity to meet the requirements of 3.5.8, 3.5.9, and 3.5.10.1.

4.4.2 Road test. The vehicle shall be road tested (less payload) for a distance of not less than 70 miles. At least 50 miles of this distance shall be over improved roads at speeds as great as 55 mph. At least 20 miles of this distance shall be over unimproved roads at speeds as great as 15 mph. During the road test, the service brakes shall be tested to verify conformance to stopping requirements of 3.4.2. After the road test, the vehicle shall be examined for evidence of misalignment, binding, or other malfunction and the interior equipment inspected to ascertain that it is secure during transit.

4.4.3 Interior sound level test. An interior sound level test shall be conducted in the conference area to verify conformance to the requirements in 3.3.4.

4.4.4 Leakproof test. A test shall be conducted as specified herein to verify that the vehicle is leakproof. The vehicle shall be exposed to a water spray of 25 psi located 2 feet from the vehicle for at least 30 minutes. Spray shall be projected on all sides, roof, and bottom of the vehicle at one time.

4.4.5 Equipment operational tests. An equipment operational test shall be conducted to verify satisfactory performance of the following: 12V lighting system, sound system, awning system, electrical system, and the heating and air conditioning systems.

4.4.6 Auxiliary generator test. An operational test of not less than 2 hours shall be conducted to verify satisfactory operation of the auxiliary generator. The auxiliary generator shall be started and shut off at least four times during the test from the remote control station and the compartment control panel. During this test, the electrical system shall be operating at maximum design load with all circuits loaded simultaneously to design capacity, except that either the heating load or the air conditioning load, whichever is greater, shall be in operation, but not both at the same time. The generator set shall be capable of supplying the maximum design load continuously without degradation in performance, malfunctioning, overheating, or shortened life expectancy.

4.5 Packaging inspection. The vehicle shall be inspected to verify conformance to the requirements of section 5.

5. PACKAGING

* 5.1 Vehicle processing. The complete van shall be preserved and packed in accordance with the contractor's standard practice. When specified (see 6.2), the van shall be preserved, packed, and marked in accordance with the mobile requirements of MIL-STD-281.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:09Z
Check the source to verify that this is the current version before use.

* 6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. Vehicles covered by this specification are designed to provide complete mobile recruiting office functions and services.

* 6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of this specification.
b. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1.1 and 2.2).
c. When a first article is required for inspection and approval (see 3.1, 4.2.1, and 6.4).
d. When additional markings or exterior colors are to be other than as specified (see 3.2.1.1).
e. When "CALL TOLL FREE" lettering is required (see 3.2.1.1.e.(2)).
f. When telephone numbers are required (see 3.2.1.1.e.(3)).
g. When diesel engine is required (see 3.5.1.1.).
h. When level of Preservation and Packing shall be in accordance with MIL-STD-281 is specified (see 5.1).

* 6.3 Data requirements. When this specification is used in an acquisition and data are required to be delivered, the data requirements shall be developed as specified by an approved Data Item Description (DD Form 1664) and delivered in accordance with the approved Contract Data Requirements List (CDRL), incorporated into the contract. When the provisions of DOD FAR Supplement, Part 27, Sub-Part 27.475-1 (DD Form 1423) are invoked and the DD Form 1423 is not used, the data should be delivered by the contractor in accordance with the contract or purchase order requirements.

6.4 First article. When a first article inspection is required, the item will be tested and should be a first production item or it may be a standard production item from the contractor's current inventory as specified in 4.2.1. The first article should consist of one complete vehicle. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examination, test, and approval of the first article.

6.5 Changes from previous issue. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:09Z
Check the source to verify that this is the current version before use.

* 6.6 Subject term (key word) listing.

Expositions
Illuminating
Motor Vehicle
Recruiting

Custodian:
Navy - YD

Preparing Activity:
Navy - YD

(Project 2320-N446)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:09Z
Check the source to verify that this is the current version before use.


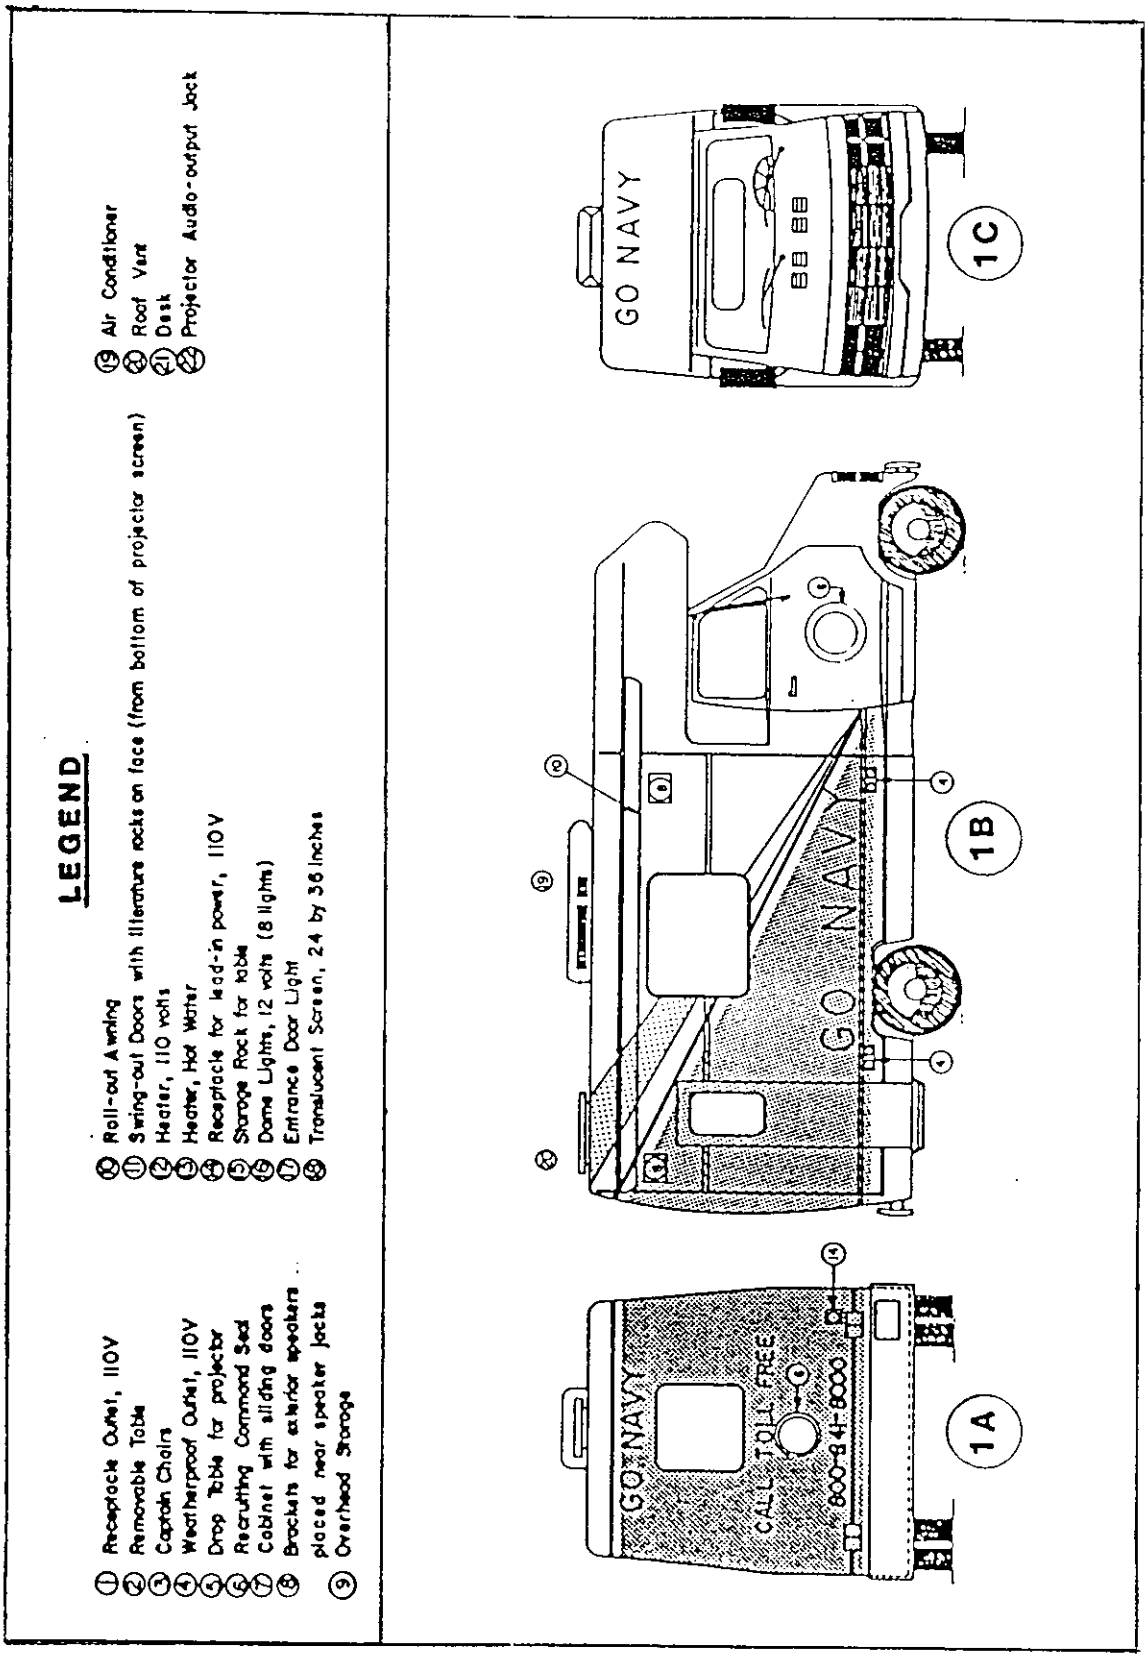


FIGURE 1. Exterior views.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:09Z
Check the source to verify that this is the current version before use.

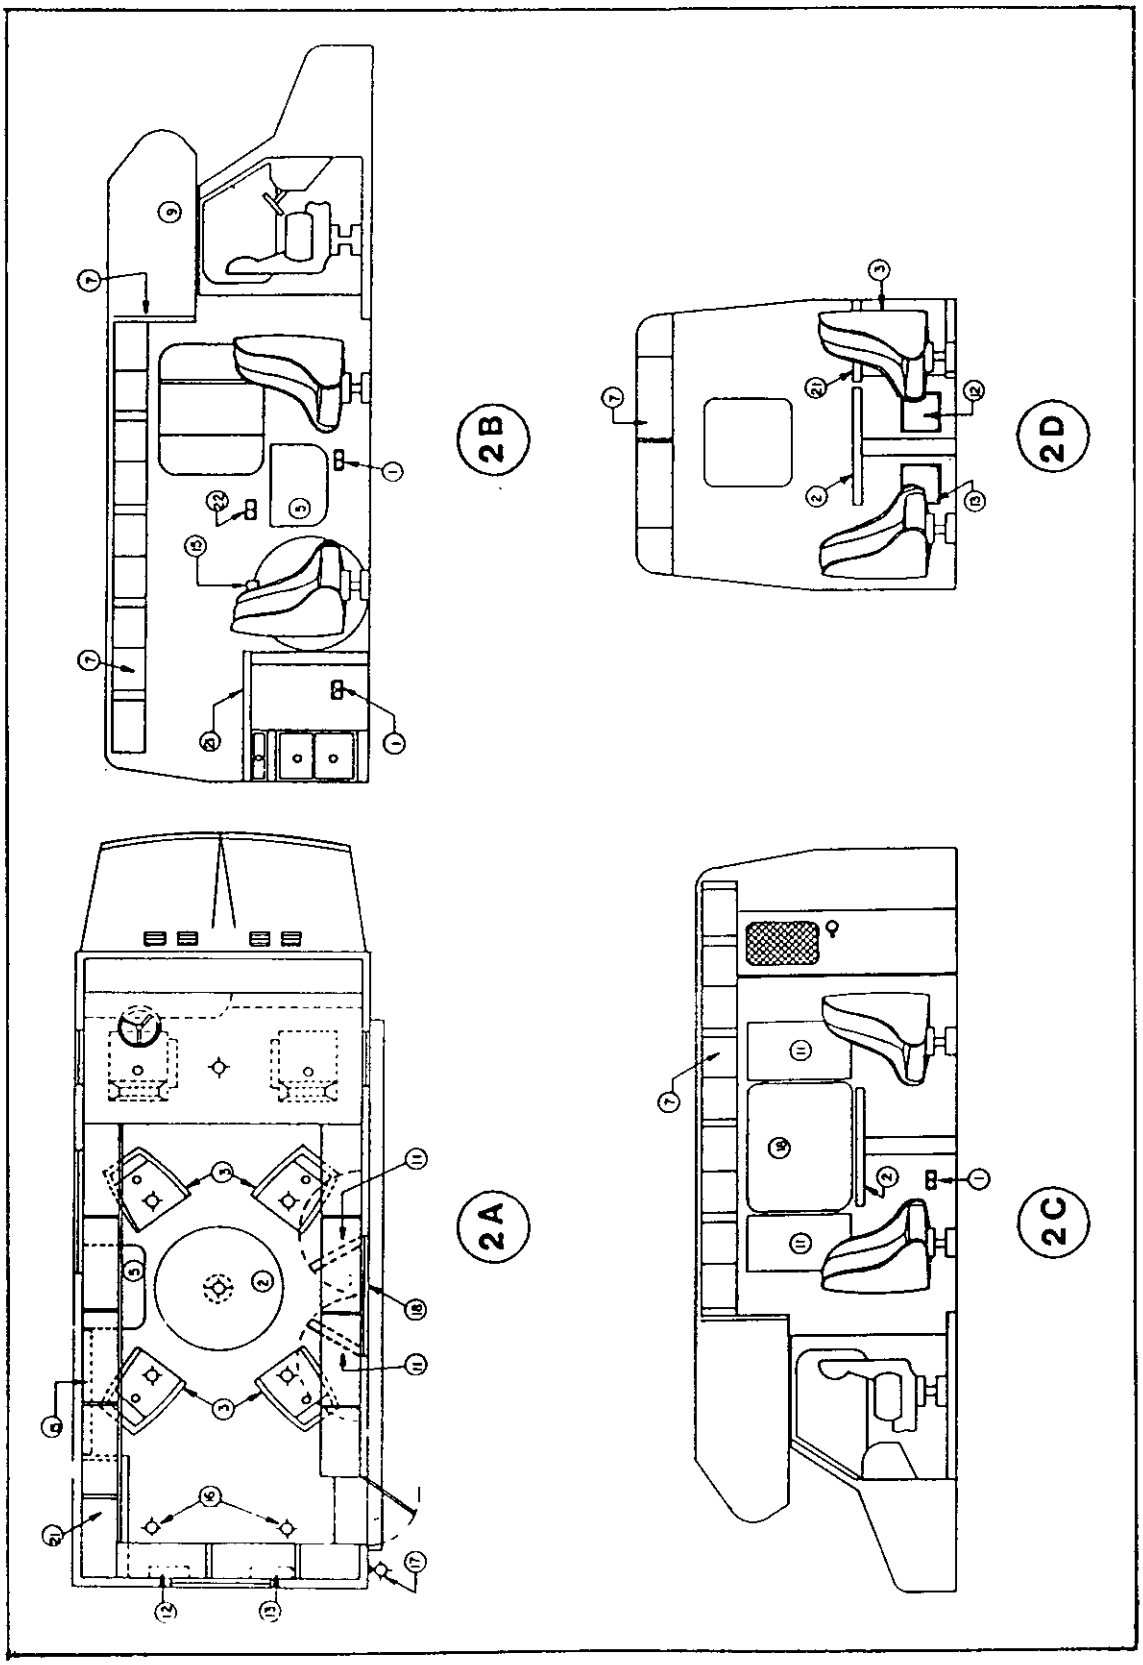

NOTE:
1. See figure 1 for legend.

FIGURE 2. Interior views.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:09Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER MIL-V-29192B(YD)	2. DOCUMENT DATE (YYMMDD) 1990 SEPTEMBER 27

3. DOCUMENT TITLE
VAN, RECRUITING/EXHIBIT, FORWARD CONTROL, 4 BY 2

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME A. R. VILLEGAS, Project Manager Equipment Criteria Development Division	b. TELEPHONE (Include Area Code) (1) Commercial (805) 982-5572 (2) AUTOVON 551-5572
c. ADDRESS (Include Zip Code) Commanding Officer (156) Naval Construction Battalion Center Port Hueneme, CA 93043-5000	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340

Source: https://assist.dla.mil - Downloaded: 2026-10-20T22:09Z
Check the source to verify that this is the current version before use.