INCH-POUND
MIL-M-7793/10B
10 November 1994
SUPERSEDING
MIL-M-7793/10A
15 September 1988

MILITARY SPECIFICATION SHEET

METER, TIME TOTALIZING, MINIATURE, DIGITAL, 115 V. 60 Hz

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-M-7793.

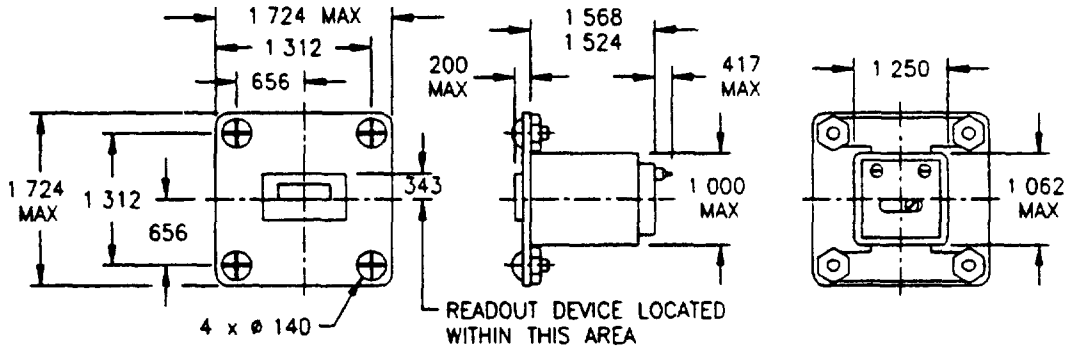


FIGURE 1. M7793/10-001.

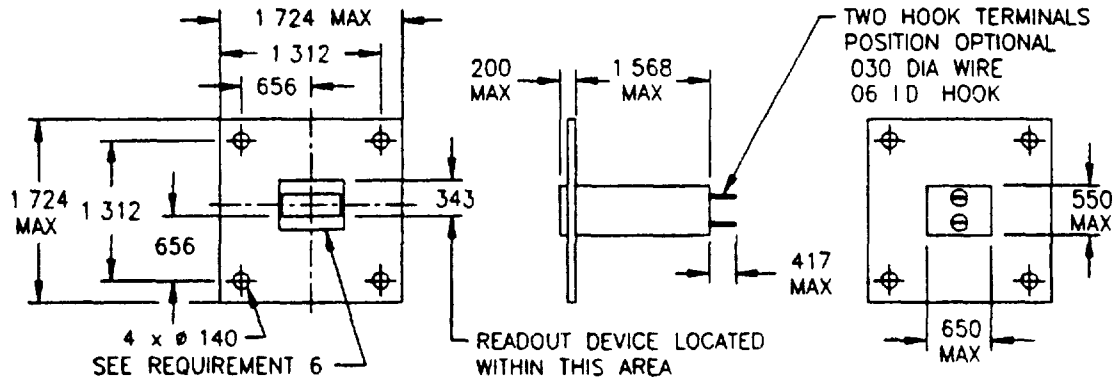


FIGURE 2. M7793/10-001A through M7793/10-004A.

AMSC N/A FSC 6645

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T08:59Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. All dimensions are in inches. Unless otherwise specified, tolerances are ±0.015 (three decimal) and ±0.02 (two decimal).

2. Meters designated to be mounted by the front surface of mounting flange shall have mounting flanges tin-plated on the front surface in accordance with MIL-T-10727 to provide an electrical ground for the case. The rear surface of the mounting flange shall be tin plated for meters designed to be mounted by the rear surface of the mounting flange.

3. The alternate configuration, figure 2, meters may have a Cupro-Nickel material for the flange, and the desired surface unpainted to provide an electrical ground for the case; or use the method of Requirement 2. See table I for the identified conductive surfaces.

TABLE I. Meter readouts and flange conductive surface location.

Part Number	Readout Maximum Hours	Flange Conductive Surface
M7793/10-001	9999 or 9999.9 1/	optional
M7793/10-001A	9999 or 9999.9 1/	rear
M7793/10-002A	99999	rear
M7793/10-003A	9999 or 9999.9 1/	front
M7793/10-004A	99999	front

1/ Tenths of hours readout is optional for M7793/10-001, M7793/10-001A, and M7793/10-003A.

4. Meters may be supplied with an attached flange or a flange with a meter face separate from the meter. If a separate meter face is used it shall be fastened to the meter by phillips head screw (#4-40), washer and nut.

5. Meters of the alternate configuration, figure 2, shall have a mounting kit of four phillips head (#4-40) screws, washers and hex nuts supplied with each unit.

6. Meter faces shall designate with proper marking "HOURS" or "HOURS AND TENTHS".

7. Performance requirements shall be as shown in table II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T08:59Z
Check the source to verify that this is the current version before use.

TABLE II. Performance requirements.

Performance	Figure 1 Part Number M7793/10-001 1/	Figure 2 Part Number M7793/10-001A 2/ and M7793/10-003A	Figure 2 Part Number M7793/10-002A and M7793/10-004A
Life accuracy	1.0 % at 60 Hz	0.1 %	0.1 %
Voltage range	102-128 VAC	102-128 VAC	102-128 VAC
Frequency range	50-70 Hz 3/	50-70 Hz 3/	50-70 Hz 3/
Operating temperature range	-55°C to 100°C	-55°C to 100°C	-55°C to 100°C
Power consumption	3 watts maximum at 115V 60Hz	900 milliwatts avg at 115V 60 Hz	900 milliwatts avg at 115V 60 Hz
Dielectric strength	2000 VAC at sea level	600 VAC at sea level and 350 VAC at 0.82 inches of Hg	600 VAC at sea level and 350 VAC at 0.82 inches of Hg
Weight	5.0 oz maximum	2.5 oz maximum	2.5 oz maximum

1/ M7793/10-001 supersedes and is a direct replacement for MS90445-2.
2/ M7793/10-001A is a direct replacement for M7793/10-001.
3/ Accuracy is degraded at the same percent as the percentage change in input frequency from 60 Hz plus the specified accuracy tolerance.

Revision letters are not used to denote changes due to the extensiveness of the changes.

Custodians:
Army - AR
Air Force - 99

Preparing Activity:
Navy - AS
(Project No. 6645-0430-03)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T08:59Z
Check the source to verify that this is the current version before use.