INCH-POUND
MIL-DTL-7793/10C
19 October 2012
SUPERSEDING
MIL-M-7793/10B
10 November 1994

DETAIL SPECIFICATION SHEET

METER, TIME TOTALIZING, MINIATURE, DIGITAL, 115 V. 60 Hz

This specification is approved for use by all
Departments and Agencies of the Department of Defense.

Reactivated after 19 October 2012 and may be
used for new and existing designs and acquisitions.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-7793.

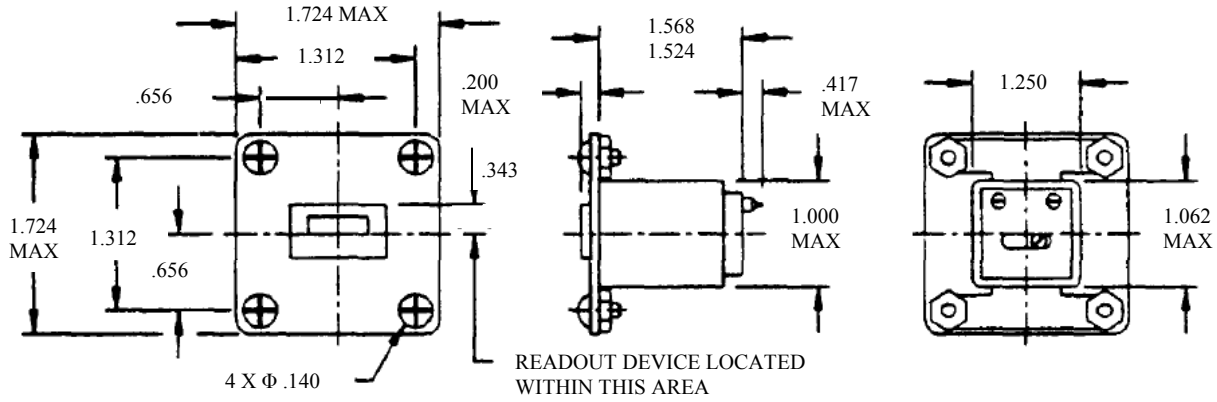


FIGURE 1. M7793/10-001.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T08:59Z
Check the source to verify that this is the current version before use.

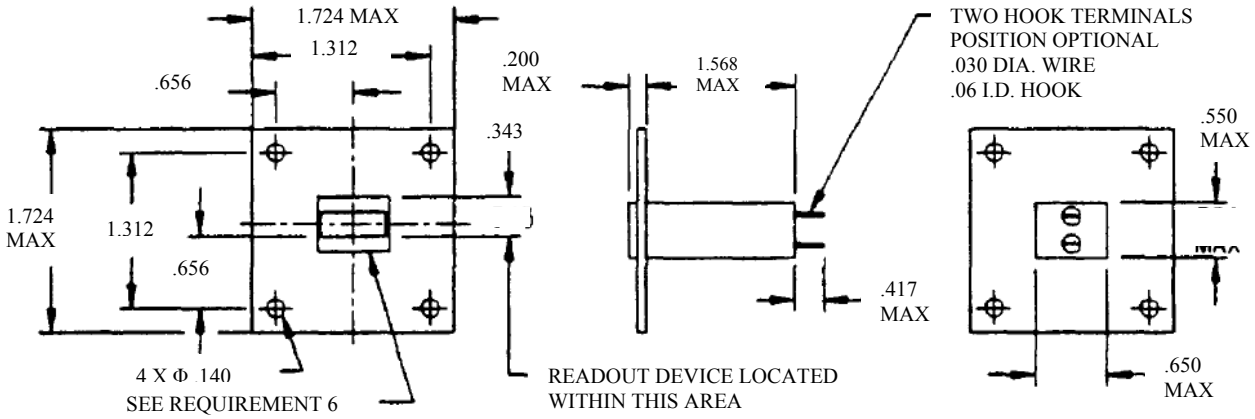


FIGURE 2. M7793/10-001A through M7793/10-004A.

REQUIREMENTS:

1. All dimensions are in inches. Unless otherwise specified, tolerances are ±0.015 (three decimal) and ±0.02 (two decimal).

2. Meters designated to be mounted by the front surface of the mounting flange shall have mounting flanges tin-plated on the front surface in accordance with ASTM-B545 to provide an electrical ground for the case. The rear surface of the mounting flange shall be tin-plated for meters designed to be mounted by the rear surface of the mounting flange.

3. The alternate configuration, figure 2, meters may have a Cupro-Nickel material for the flange, and the desired surface unpainted to provide an electrical ground for the case; or use the method of requirement 2. See table I for the identified conductive surfaces.

TABLE I. Meter readouts and flange conductive surface location.

Part Number	Readout Maximum Hours	Flange Conductive Surface
M7793/10-001	9999 or 9999.9 1/	Optional
M7793/10-001A	9999 or 9999.9 1/	Rear
M7793/10-002A	99999	Rear
M7793/10-003A	9999 or 9999.9 1/	Front
M7793/10-004A	99999	Front

1/ Tenths of hours readout is optional for M7793/10-001, M7793/10-001A, and M7793/10-003A

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T08:59Z
Check the source to verify that this is the current version before use.

4. Meters may be supplied with an attached flange or a flange with a meter face separate from the meter. If a separate meter face is used it shall be fastened to the meter by Phillips head screw (#4-40), washer and hex nut.

5. Meters of the alternate configuration, figure 2, shall have a mounting kit of four Phillips head (#4-40) screws, washers and hex nuts supplied with each unit.

6. Meter faces shall designate with proper marking "HOURS" or "HOURS AND TENTHS."

7. Meters shall meet the performance requirements in table II.

TABLE II. Meter Performance requirements.

Performance requirement	Figure 1 Part Number M7793/10-001 1/	Figure 2 Part Number M7793/10-001A 2/ And M7793/10-003A	Figure 2 Part Number M7793/10-002A And M7793/10-004A
Life accuracy	1.0% at 60 Hz	0.1% at 60 Hz	0.1% at 60 Hz
Voltage range	100-130 VAC	100-130 VAC	100-130 VAC
Frequency range	50 to 70 Hz 3/	50 to 70 Hz 3/	50 to 70 Hz 3/
Operating temperature range	-65° C to +125° C	-65° C to +125° C	-65° C to +125° C
Power consumption	3 watts maximum At 115 V 60 Hz	900 milliwatts max at 115 V 60 Hz	900 milliwatts max at 115 V 60 Hz
Dielectric strength	2000 VAC at sea level	600 VAC at sea level and 350 VAC at 0.82 inch of Hg	600 VAC at sea level and 350 VAC at 0.82 inch of Hg
Weight	5.0 oz maximum	2.5 oz maximum	2.5 oz Maximum

1/ M7793/10-001 supersedes MS90445-2.
2/ M7793/10-001A supersedes M7793/10-001.
3/ Accuracy is degraded at the same percent as the percentage change in input frequency from 60 Hz plus the specified accuracy tolerance.

8. Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T08:59Z
Check the source to verify that this is the current version before use.

Referenced documents. In addition to MIL-DTL-7793, this specification sheet references ASTM-B545.

Custodians:
Army - AR
Navy - AS
Air Force - 99

Preparing activity:
Navy - AS
(Project 6645-2012-012)

Review activity:
DLA - GS1

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T08:59Z
Check the source to verify that this is the current version before use.