MILITARY SPECIFICATION SHEET

METER, TIME TOTALIZING, DIGITAL,
20 to 130 VOLTS, DC or AC to 500 Hz

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the meter described herein shall consist of this document and the issue in effect of specification MIL-M-7793.

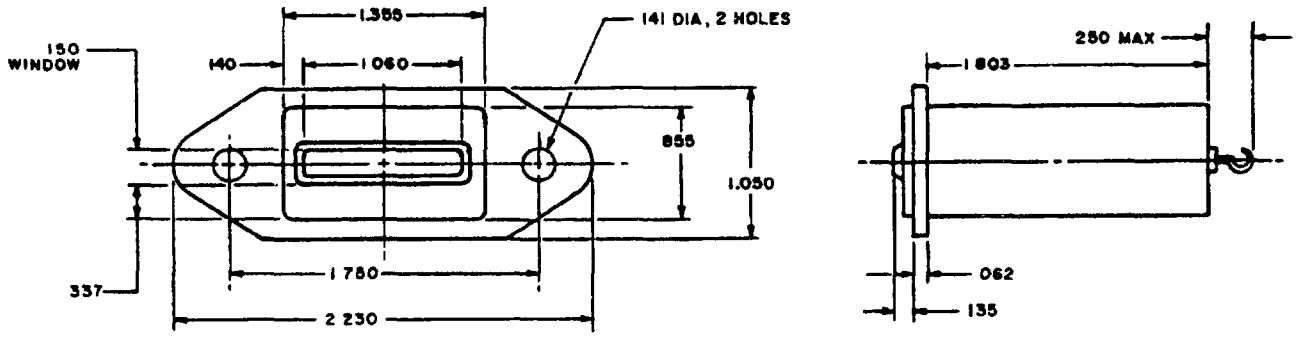

FIGURE 1. M7793/11-001

REQUIREMENTS:

1. Dimensions and configuration shall be in accordance with Figure 1. All dimensions are in inches. Unless otherwise specified, tolerances shall be ±.015.

2. Mounting flanges must be tin plated on the front surface in accordance with MIL-T-10727 to provide an electrical ground for the case.

3. Power consumption at nominal voltage shall not exceed 1 watt.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T08:59Z
Check the source to verify that this is the current version before use.

REQUIREMENTS (Continued):

4. Weight shall not exceed 3.5 ounces with flange attached.

5. Temperature range shall be from -55°C to 85°C.

6. Total readout of the meters shall be 9999.9 hours.

7. M7793/11-001 supersedes and is a direct replacement for MS90493-2.

8. Input voltage range: 20 to 130 dc or ac shall be 23 to 29 dc and the dc or ac to 500 Hz shall be 102 to 128 ac.

9. Accuracy: 20 to 130 dc or ac shall be ±0.1 percent; the dc or ac to 500 Hz shall be ±1.0 percent.

Custodians:
Navy-AS
Army-AR
Air Force-99

Preparing Activity
Navy-AS
(Proj. No. 6645-0355)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T08:59Z
Check the source to verify that this is the current version before use.