MIL-M-7793/7A
15 September 1988
SUPERSEDING
MIL-M-7793/7
24 September 1982

MILITARY SPECIFICATION SHEET

METER, TIME TOTALIZING, MINIATURE, DIGITAL, 115 V, 60 Hz

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirement for acquiring the meter described herein shall consist of this specification and the latest issue in effect of MIL-M-7793.

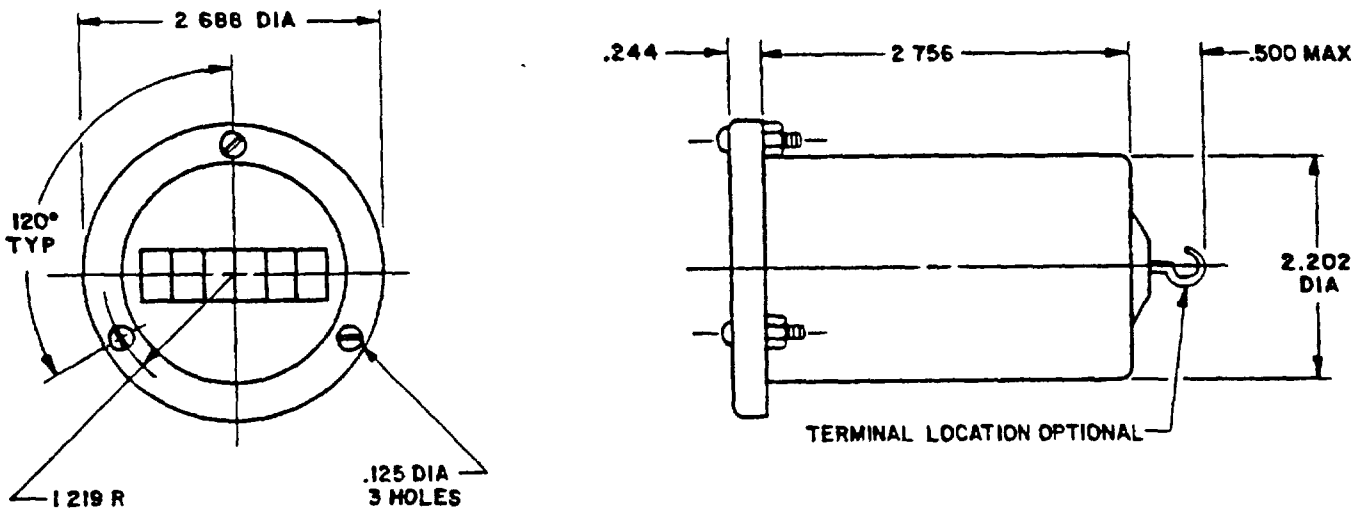


FIGURE 1.

AMSC N/A FSC 6645

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T08:58Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. All dimensions are in inches. Unless otherwise specified, tolerances shall be: decimals ±.025, angles ±1°.

2. Mounting flanges shall be tin-plated on the front surface in accordance with MIL-T-10727 to provide an electrical ground for the case.

Performance:

Life accuracy: ±0.1% from 102 to 128 V at 60 Hz and -55 to +100°C.

Frequency rating: Meter shall operate satisfactorily and maintain the life accuracy limits specified above over the frequency range of 50 to 70 Hz (see Note 2).

Meter flange: Meter flange, if a separate part from the enclosure, shall be fastened to the enclosure securely by screw, washer and nut.

Power consumption: Power consumption at 115 V, 60 Hz AC shall not exceed 4.0 W.

Operating temperature range: -55 to +100°C.

Time range: Total readout of the meters shall be 9999 hours.

Voltage range: Operating voltage shall be from 102 to 128 V AC.

Weight: Weight shall be not greater than 11 ounces with flange attached.

Random vibration not required.

NOTES:

1. M7793/7-001 supersedes and is a direct replacement for MS17324-3.

2. Accuracy is degraded at the same percent as the percentage change in input frequency from 60 Hz, plus the specified accuracy tolerance.

Custodians:
Navy - AS
Army - AR
Air Force - 99

Preparing activity:
Navy - AS

(Project Number 6645-0393)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T08:58Z
Check the source to verify that this is the current version before use.