INCH-POUND
MIL-DTL-7793/7B
19 October 2012
SUPERSEDING
MIL-M-7793/7A
15 September 1988

DETAIL SPECIFICATION SHEET

METER, TIME TOTALIZING, MINIATURE, DIGITAL, 115 V, 60 Hz

This specification is approved for use by all
Departments and Agencies of the Department of Defense.

Reactivated after 19 October 2012 and may be
used for new and existing designs and acquisitions.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-7793.

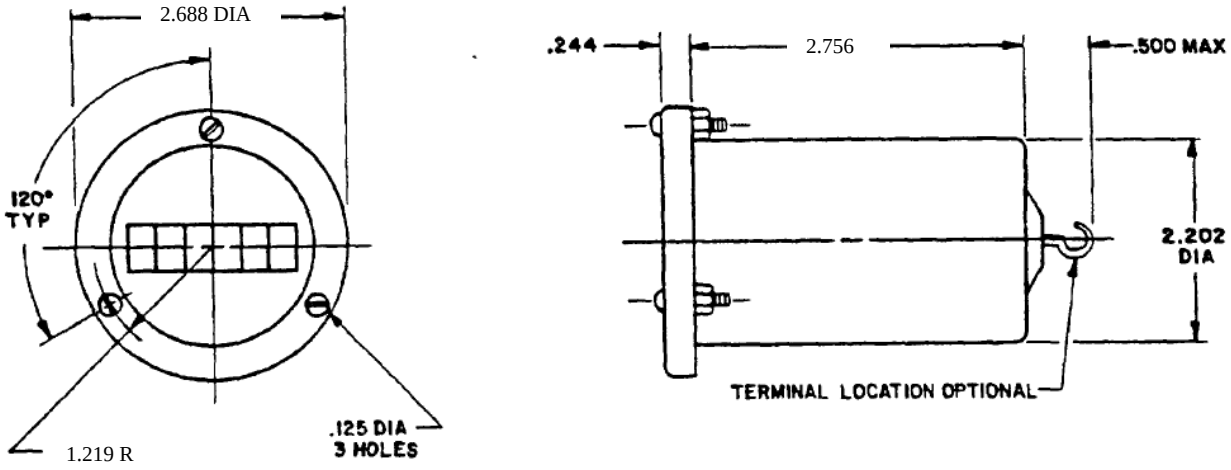

FIGURE 1. Meter configuration.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T08:58Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Dimensions. All dimensions are in inches. Unless otherwise specified, tolerances shall be: decimals ±.025, angles ±1°.

2. Mounting flanges. Mounting flanges shall be tin-plated on the front surface in accordance with ASTM-B545 to provide an electrical ground for the case.

3. Life accuracy. Meter accuracy shall be ±0.1 percent from -55 to 100° C and 102 to 128 VAC at 60 Hz.

4. Frequency rating. The meter shall operate satisfactorily and maintain the life accuracy limits as specified above over the frequency range of 50 to 70 Hz (see Note 2).

5. Meter flange. The meter flange, if a separate part from the enclosure, shall be fastened to the enclosure securely by screw, washer and nut.

6. Power consumption. Power consumption at 115 volts alternating current (VAC), 60 Hz shall not exceed 4.0W.

7. Operating temperature range. The operating temperature range shall be from -55 to 100° C.

8. Time range. Total readout of the meters shall be 9999 hours.

9. Voltage range. The operating voltage shall be from 102 to 128 VAC.

10. Weight. Weight shall be not greater than 11 ounces with flange attached.

11. Dielectric strength test voltages. The dielectric test voltages shall be 350 V root mean square (rms) at altitude specified in MIL-DTL-7793 and 600 V rms at room ambient temperature (approximately 25º C) and pressure.

12. Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T08:58Z
Check the source to verify that this is the current version before use.

NOTE:

1. M7793/7-001 supersedes MS17324-3.

2. Accuracy is degraded at the same percent as the percentage change in input frequency from 60 Hz, plus the specified accuracy tolerance.

Referenced documents. In addition to MIL-DTL-7793, this specification sheet references ASTM-B545.

Custodians:
Army - AR
Navy - AS
Air Force - 99

Preparing activity:
Navy - AS
(Project 6645-2012-009)

Review activity:
DLA – GS1

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T08:58Z
Check the source to verify that this is the current version before use.