INCH-POUND
MIL-M-7793/8B
7 December 1994
SUPERSEDING
MIL-M-7793/8A
15 September 1988

MILITARY SPECIFICATION SHEET

METER, TIME TOTALIZING, MINIATURE, DIGITAL, 115 V. 60 OR 400 Hz

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-M-7793.

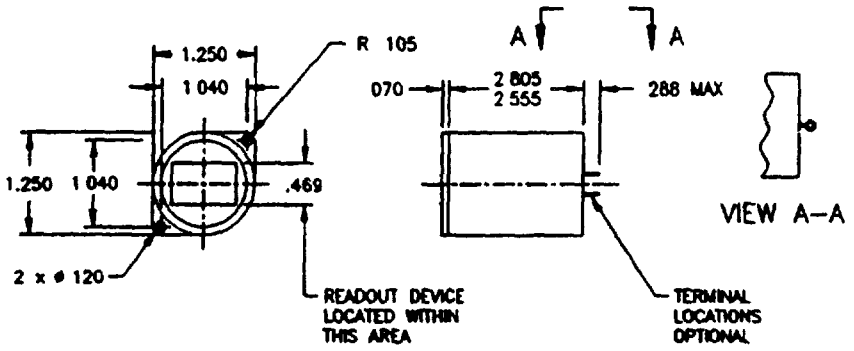


FIGURE 1. M7793/8-001 and M7793/8-002.

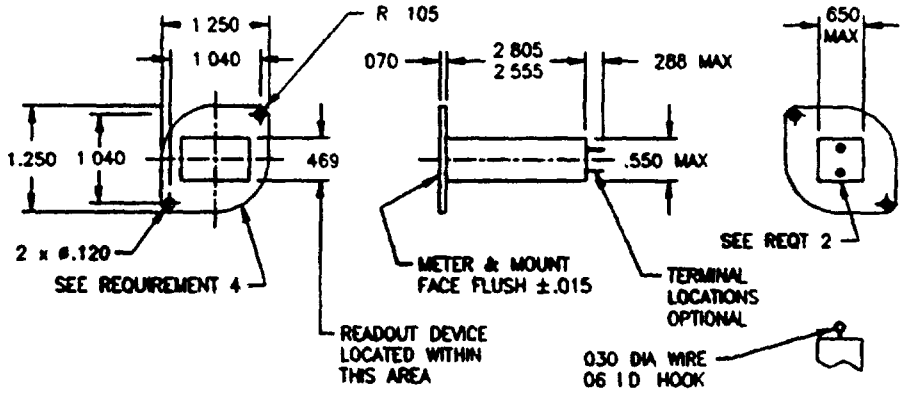


FIGURE 2. M7793/8-001A through M7793/8-004A

AMSC N/A FSC 6645

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T08:58Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. All dimensions are in inches. Unless otherwise specified, tolerances are ±0.015 (three decimal) and ±0.02 (two decimal).

2. Mounting flanges shall be tin-plated on the rear surface in accordance with MIL-T-10727 to provide an electrical ground for the case.

3. Performance requirements shall be as shown in table I.

TABLE I. Performance requirements.

Performance	Figure 1 Part Number M7793/8-001 1/,2/, & 4/	Figure 1 Part Number M7793/8-002 1/, 2/, & 4/	Figure 2 Part Number M7793/8-001A 1/, 2/, & 5/ M7793/8-003A 3/	Figure 2 Part Number M7793/8-002A 1/, 2/, & 5/ M7793/8-004A 3/
Life accuracy 6/	0.1% at 400 Hz	0.1% at 60 Hz	0.1% at 400 Hz	0.1% at 60 Hz
Voltage range	102-128 VAC	102-128 VAC	102-128 VAC	102-128 VAC
Frequency range	380-420 Hz	50-70 Hz	380-420 Hz	50-70 Hz
Operating temperature range	-55°C to 100°C	-55°C to 100°C	-55°C to 100°C	-55°C to 100°C
Power consumption	3 watts maximum at 115 V 400 Hz	3 watts maximum at 115 V 60 Hz	900 milliwatts avg at 115 V 400 Hz	900 milliwatts avg at 115 V 60 Hz
Dielectric strength	500 VAC at 0.82 inches of Hg	1000 VAC at sea level	600 VAC at sea level and 350 VAC at 0.82 inches of Hg	600 VAC at sea level and 350 VAC at 0.82 inches of Hg
Weight	6.0 oz maximum	6.0 oz maximum	2.5 oz maximum	2.5 oz maximum

1/ Tenths of hours readout is optional for M7793/8-001, 002, 001A, and 002A meter assemblies.

Source: https://assist.dla.mil -- Downloaded: 202640-17T08:58Z
Check the source to verify that this is the current version before use.

2/ Time range for M7793/8-001, 002, 001A, and 002A meter assemblies is 0 to 9999 hours.
3/ Time range for M7793/8-003A and 004A meter assemblies is 0 to 99999 hours.
4/ M7793/8-001 supersedes and is a direct replacement for MS17325-4.
M7793/8-002 supersedes and is a direct replacement for MS17325-5.
5/ M7793/8-001A is a direct replacement for M7793/8-001.
M7793/8-002A is a direct replacement for M7793/8-002.
6/ Accuracy is degraded at the same percent as the percentage change in the appropriate input frequency from 60 Hz or 400 Hz plus the specified accuracy tolerance.

4. The alternate configuration, figure 2, meters may have a Cupro-Nickel material for the flange, with the rear surface unpainted to provide an electrical ground for the case; or use the method of Requirement 2.

5. Meter faces shall designate with proper marking "HOURS" or "HOURS AND TENTHS".

Revision letters are not used to denote changes due to the extensiveness of the changes.

Custodians:
Army - AR
Air Force - 99

Preparing Activity:
Navy - AS
(Project Number 6645-0430-05)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T08:58Z
Check the source to verify that this is the current version before use.