INCH-POUND
MIL-DTL-7793/8C
19 October 2012
SUPERSEDING
MIL-M-7793/8B
7 December 1994

DETAIL SPECIFICATION SHEET

METER, TIME TOTALIZING, MINIATURE, DIGITAL, 115 V. 60 or 400 Hz,

This specification is approved for use by all
Departments and Agencies of the Department of Defense.

Reactivated after 19 October 2012 and may be
used for new and existing designs and acquisitions.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-7793.

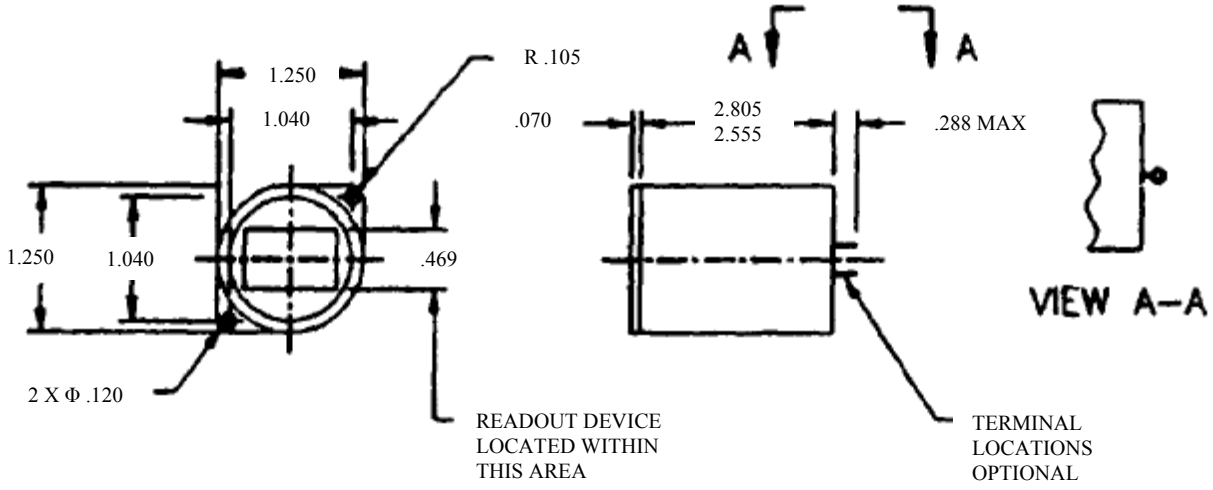


FIGURE 1. M7793/8-001 and M7793/8-002.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T08:58Z
Check the source to verify that this is the current version before use.

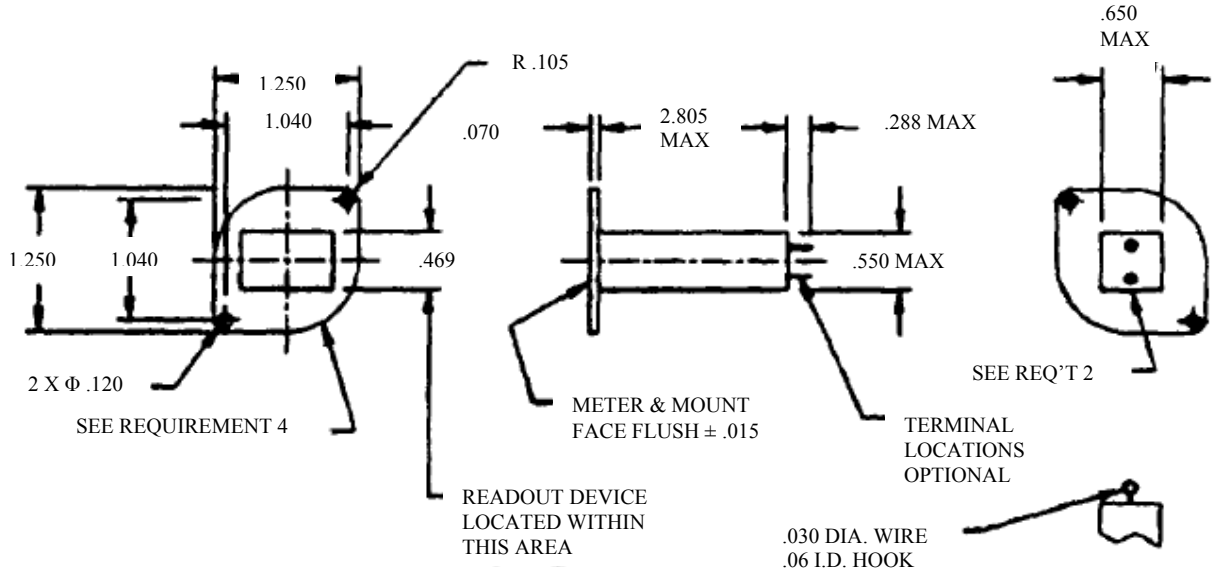


FIGURE 2. M7793/8-001A through M7793/8-004A

REQUIREMENTS:

1. Dimensions. All dimensions are in inches. Unless otherwise specified, tolerances are ±0.015 (three decimal) and ±0.02 (two decimal).

2. Mounting flanges. Mounting flanges shall be tin-plated on the rear surface in accordance with ASTM-B545 to provide an electrical ground for the case.

3. Performance requirements. Performance requirements shall be as shown in table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T08:58Z
Check the source to verify that this is the current version before use.

TABLE I. Performance requirements.

Performance	Figure 1 Part Number M7793/8-001 1/, 2/, & 4/	Figure 1 Part Number M7793/8-002 1/, 2/, & 4/	Figure 2 Part Number M7793/8-001A 1/, 2/, & 5/ M7793/8-003A 3/	Figure 2 Part Number M7793/8-002A 1/, 2/, & 5/ M7793/8-004A 3/
Life accuracy 6/	0.1% at 400 Hz	0.1% at 60 Hz	0.1% at 400 Hz	0.1% at 60 Hz
Voltage range	100-130 VAC	100-130 VAC	100-130 VAC	100-130 VAC
Frequency range	380 - 420 Hz	50 - 70 Hz	380 – 420 Hz	50 – 70 Hz
Operating temperature range	-65° C to +125° C	-65° C to +125° C	-65° C to +125° C	-65° C to +125° C
Power consumption	3 watts maximum At 115 V 400 Hz	3 watts maximum At 115 V 60 Hz	900 milliwatts max at 115 V 400 Hz	900 milliwatts max at 115 V 60 Hz
Dielectric strength	500 VAC at 0.82 inches of Hg	1000 VAC at sea level	600 VAC at sea level and 350 VAC at 0.82 inches of Hg	600 VAC at sea level and 350 VAC at 0.82 inches of Hg
Weight	6.0 oz maximum	6.0 oz maximum	2.5 oz maximum	2.5 oz Maximum

NOTES:

1/ Tenths of hours readout is optional for M7793/8-001, 002, 001A, and 002A meter assemblies.

2/ Time range for M7793/8-001, 002, 001A, and 002A meter assemblies is 0 to 9999 hours.

3/ Time range for M7793/8-003A and 004A meter assemblies is 0 to 99999 hours.

4/ M7793/8-001 supersedes MS17325-4 and M7793/8-002 supersedes MS17325-5.

5/ M7793/8-01A supersedes M7793/8-001 and M7793/8-002A supersedes M7793/8-002.

6/ Accuracy is degraded at the same percent as the percentage change in the appropriate input frequency from 60 Hz to 400 Hz plus the specified accuracy tolerance.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T08:58Z
Check the source to verify that this is the current version before use.

4. The alternate configuration, figure 2, meters may have a Cupro-Nickel material for the flange, with the rear surface unpainted to provide an electrical ground for the case; or use the method of Requirement 2.

5. Meter faces shall designate with proper marking “HOURS” or “HOURS AND TENTHS”.

6. Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Referenced documents. In addition to MIL-DTL-7793, this specification sheet references ASTM-B545.

Custodians:
Army - AR
Navy - AS
Air Force - 99

Preparing activity:
Navy - AS
(Project 6645-2012-010)

Review activity:
DLA – GS1

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T08:58Z
Check the source to verify that this is the current version before use.