MILITARY SPECIFICATION SHEET

METER, TIME TOTALIZING, MINIATURE, DIGITAL, 115 V, 400 Hz

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirement for acquiring the meter described herein shall consist of this specification and the latest issue in effect of MIL-M-7793.

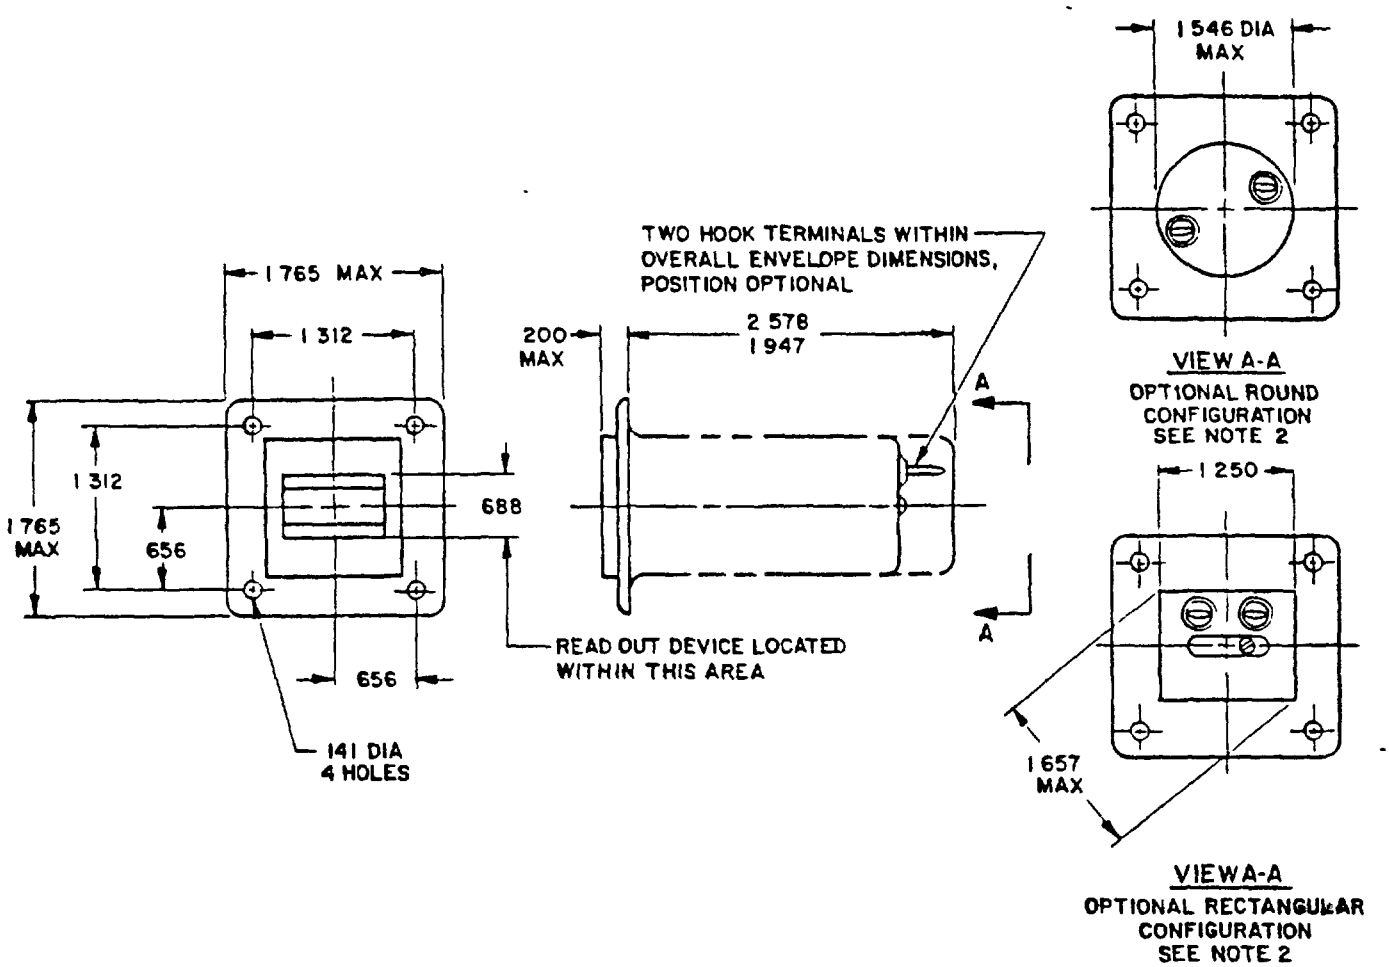


FIGURE 1.

AMSC N/A FSC 6645

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202610-17T08:58Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. All dimensions are in inches. Unless otherwise specified, tolerances shall be ±.015.

2. Meters designated to be mounted by the front surface of mounting flange shall have mounting flanges tin-plated on the front surface in accordance with MIL-T-10727 to provide an electrical ground for the case. The rear surface of the mounting flange shall be tin-plated for meters designed to be mounted by the rear surface of the mounting flange.

3. Meters may be supplied with an attached flange or a flange with a meter face separate from the meter. If a separate meter face is used it shall be fastened to the meter by phillips head screw (#4-40), washer and nut.

Performance:

Life accuracy: ±1.0% from 100 to 128 V AC at 400 Hz, and -55 to +100°C.

Frequency rating: Meter shall operate satisfactorily and maintain the life accuracy limits as specified above over hte frequency range of 380 to 420 Hz (see Note 4).

Power consumption· Power consumption at 115 V and 400 Hz shall not exceed 3.0 W.

Time range: Total readout of the meters shall be 9999.9 hours.

Operating temperature range: -55 to +100°C.

Voltage range: Operating voltage shall be from 102 to 128 V AC.

Weight: Weight shall be not greater than 9.0 ounces with flange attached

Random vibration not required.

NOTES:

1. Part number: M7793/9-001

2. Meters supplied under M7793/9 may have either round or rectangular casings. To accomodate either type, the mounting hole shall be no less than 1.657 inches in diameter. Users are cautioned to leave sufficient space to accomodate either meter shape for replacement purposes.

3. M7793/9-001 supersedes and is a direct replacement for MS28053-6.

4. Accuracy is degraded at the same percent as the percentage change in input frequency from 400 Hz, plus the specified accuracy tolerance.

Source: https://assist.dla.mil -- Downloaded: 202610-17T08:58Z
Check the source to verify that this is the current version before use.

Custodians:
Navy - AS
Army - AR
Air Force - 99

Preparing activity:
Navy - AS

(Project Number 6645-0395)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T08:58Z
Check the source to verify that this is the current version before use.