
MILITARY SPECIFICATION SHEET

CAPACITORS, FIXED, ELECTROLYTIC (NONSOLID ELECTROLYTE), TANTALUM, (POLARIZED, SINTERED SLUG), 85°C (VOLTAGE DERATED TO 125°C), ESTABLISHED RELIABILITY, STYLE CLR75

This specification is approved for use within the Department of the Air Force and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the capacitors described herein shall consist of this specification and the latest issue of MIL-C-39006.

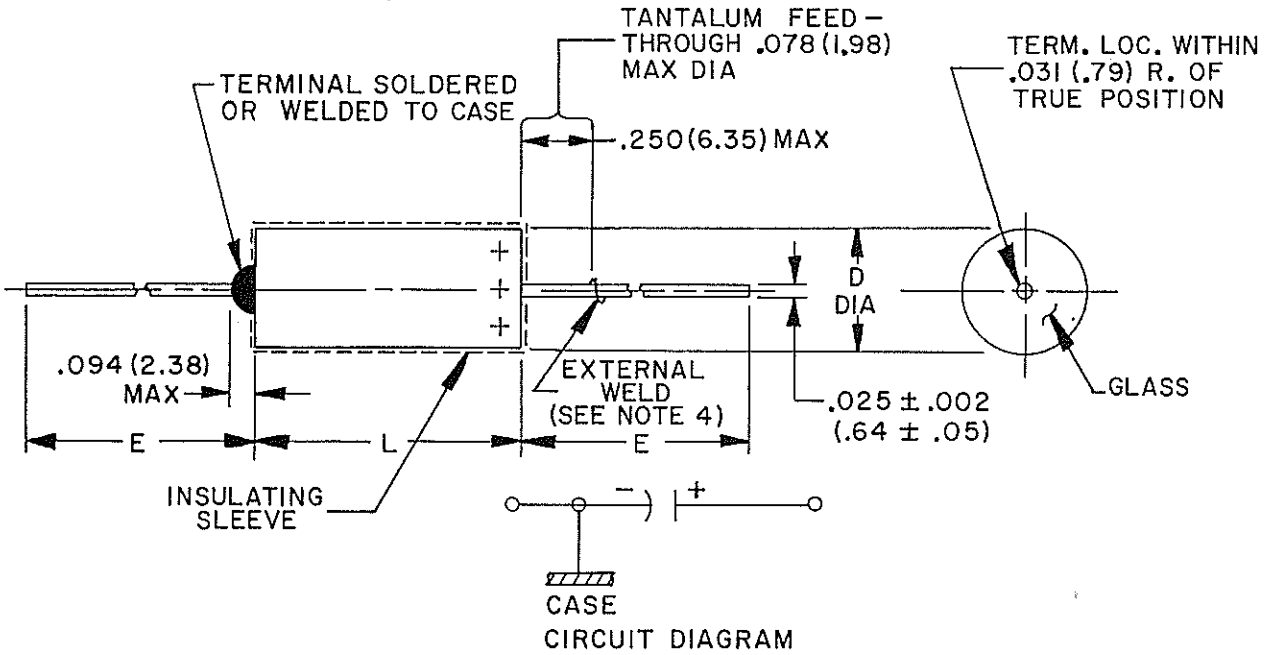

Case size	Dimensions			
	Basic case		Insulated case	
	L 1/	D	D max	E
	+.031 (.79) -.016 (.41)	±.016 (.41)		±.250 (6.35)
T1	.453 (11.51)	.188 (4.78)	.219 (5.56)	1.500 (38.10)
T2	.641 (16.28)	.281 (7.14)	.312 (7.92)	2.250 (57.15)
T3	.766 (19.46)	.375 (9.53)	.406 (10.31)	2.250 (57.15)
T4	1.062 (26.97)	.375 (9.53)	.406 (10.31)	2.250 (57.15)

1/ Length of basic case; sleeving shall be as specified in MIL-C-39006.

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are in parentheses.
3. Metric equivalents (to the nearest .01 mm) are given for general information only.
4. The weld shall not be enclosed in the end seal.

FIGURE 1. Style CLR 75.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:19Z
Check the source to verify that this is the current version before use.

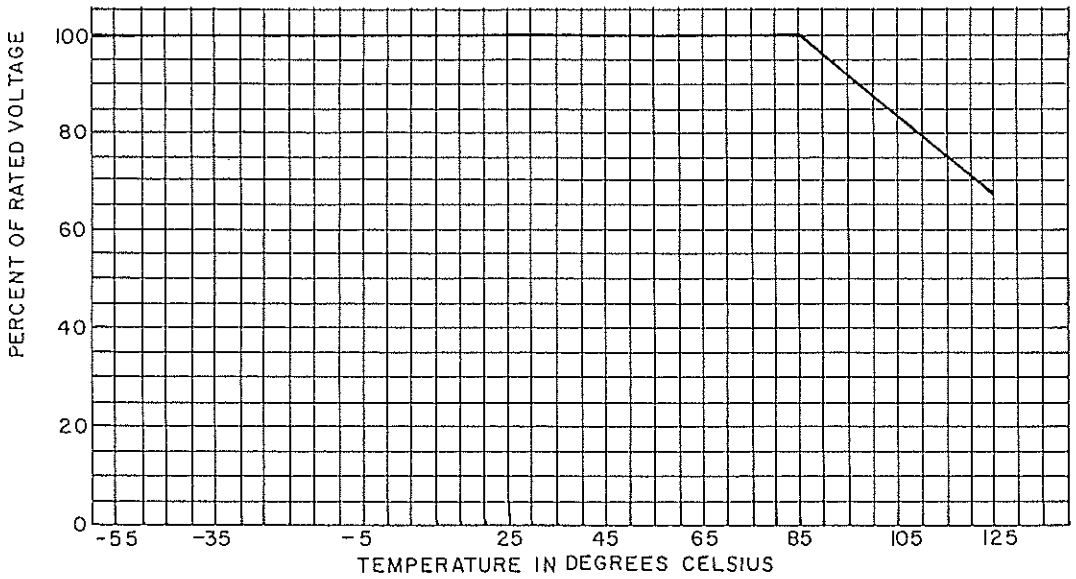


FIGURE 2. Voltage derating with temperature.

REQUIREMENTS:

Design and construction:

Dimensions and configuration: See figure 1.

Case type: Tubular, insulated, bonded metal with the innermost layer being tantalum and comprising a minimum of 10 percent of the total wall.

Seal type: Hermetic (glass-to-tantalum anode).

Terminals:

Axial-wire lead: Anode (type N4 or N5 of MIL-STD-1276). Cathode (type C4 or C5 of MIL-STD-1276).

Rated temperature: -55°C to +85°C, voltage derated to +125°C (see figure 2).

Rated voltage: See table I.

Capacitance (cap.) (nominal): See table I.

Cap. tolerance: See table I.

Failure level (FR): See table I.

Constant voltage conditioning: As specified in MIL-C-39006.

DC leakage (DCL) (max) (at +25°C): See table I.

Cap. (nominal): Method 305 of MIL-STD-202 (see table I).

Dissipation factor (DF) (max): See table I.

Seal: Method 112 of MIL-STD-202, conditions A and C.

Shock (specified pulse): Method 213 of MIL-STD-202, condition I (100 g's).

Vibration, high frequency: Method 204 of MIL-STD-202, condition D (20 g's).

Thermal shock: Method 107 of MIL-STD-202, condition A.

DCL: 125 percent (max) of +25°C value of table I.

Δ Cap: Within ±5 percent of initial measurement.

DF: 115 percent of initial requirement.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:19Z
Check the source to verify that this is the current version before use.

TABLE I. Capacitor characteristics.

Rated voltage (+85°C) volts dc	Cap. µF	Cap. tolerance + or - %	DC leakage (max) +25°C µA	DC leakage (max) +85°C and +125°C µA	Dissipation factor (max) %	Derated voltage (+125°C) volts dc	Surge voltage (+85°C) volts dc	Impedance (max) ohms	Capacitance change at -55°C %	Capacitance change at +85°C %	Capacitance change at +125°C %	Case size	Part no. M39006/26- Failure rate level (%1,000 hr) M (1.0)	P (0.1)	R (0.01)	S (0.001)
6	30	20	1	2	9.1	4	6.9	100	-40	+10.5	+12	T1	0001	0208	0415	0622
6	30	10	1	2	9.1	4	6.9	100	-40	+10.5	+12	T1	0002	0209	0416	0623
6	30	5	1	2	9.1	4	6.9	100	-40	+10.5	+12	T1	0003	0210	0417	0624
6	68	20	1	2	20.4	4	6.9	60	-40	+14	+16	T1	0004	0211	0418	0625
6	68	10	1	2	20.4	4	6.9	60	-40	+14	+16	T1	0005	0212	0419	0626
6	68	5	1	2	20.4	4	6.9	60	-40	+14	+16	T1	0006	0213	0420	0627
6	140	20	1	3	21.3	4	6.9	40	-40	+14	+16	T2	0007	0214	0421	0628
6	140	10	1	3	21.3	4	6.9	40	-40	+14	+16	T2	0008	0215	0422	0629
6	140	5	1	3	21.3	4	6.9	40	-40	+14	+16	T2	0009	0216	0423	0630
6	270	20	1	6.5	81.8	4	6.9	25	-44	+17.5	+20	T2	0010	0217	0424	0631
6	270	10	1	6.5	81.8	4	6.9	25	-44	+17.5	+20	T2	0011	0218	0425	0632
6	270	5	1	6.5	81.8	4	6.9	25	-44	+17.5	+20	T2	0012	0219	0426	0633
6	330	20	2	7.9	49.6	4	6.9	20	-44	+14	+16	T3	0013	0220	0427	0634
6	330	10	2	7.9	49.6	4	6.9	20	-44	+14	+16	T3	0014	0221	0428	0635
6	330	5	2	7.9	49.6	4	6.9	20	-44	+14	+16	T3	0015	0222	0429	0636
6	560	20	2	13	128.0	4	6.9	25	-64	+17.5	+20	T3	0016	0223	0430	0637
6	560	10	2	13	128.0	4	6.9	25	-64	+17.5	+20	T3	0017	0224	0431	0638
6	560	5	2	13	128.0	4	6.9	25	-64	+17.5	+20	T3	0018	0225	0432	0639
6	1200	20	3	14	144.4	4	6.9	20	-80	+25	+25	T4	0019	0226	0433	0640
6	1200	10	3	14	144.4	4	6.9	20	-80	+25	+25	T4	0020	0227	0434	0641
8	25	20	1	2	7.6	5	9.2	100	-40	+10.5	+12	T1	0021	0228	0435	0642
8	25	10	1	2	7.6	5	9.2	100	-40	+10.5	+12	T1	0022	0229	0436	0643
8	25	5	1	2	7.6	5	9.2	100	-40	+10.5	+12	T1	0023	0230	0437	0644
8	56	20	1	2	17.0	5	9.2	59	-40	+14	+16	T1	0024	0231	0438	0645
8	56	10	1	2	17.0	5	9.2	59	-40	+14	+16	T1	0025	0232	0439	0646
8	56	5	1	2	17.0	5	9.2	59	-40	+14	+16	T1	0026	0233	0440	0647
8	220	20	1	7	66.4	5	9.2	30	-44	+17.5	+20	T2	0027	0234	0441	0648
8	220	10	1	7	66.4	5	9.2	30	-44	+17.5	+20	T2	0028	0235	0442	0649
8	220	5	1	7	66.4	5	9.2	30	-44	+17.5	+20	T2	0029	0236	0443	0650
8	430	20	2	14	91.5	5	9.2	25	-64	+17.5	+20	T2	0030	0237	0444	0651
8	430	10	2	14	91.5	5	9.2	25	-64	+17.5	+20	T2	0031	0238	0445	0652
8	430	5	2	14	91.5	5	9.2	25	-64	+17.5	+20	T2	0032	0239	0446	0653
8	850	20	4	16	65.8	5	9.2	22	-80	+25	+25	T4	0033	0240	0447	0654
8	850	10	4	16	65.8	5	9.2	22	-80	+25	+25	T4	0034	0241	0448	0655
10	20	20	1	2	6.1	7	11.5	175	-32	+10.5	+12	T1	0035	0242	0449	0656
10	20	10	1	2	6.1	7	11.5	175	-32	+10.5	+12	T1	0036	0243	0450	0657

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:19Z
Check the source to verify that this is the current version before use.

TABLE I. Capacitor characteristics - Continued.

Rated voltage (+85°C)	Cap.	Cap. tolerance + or -	DC leakage (max)		Dissipation factor (max)	Derated voltage (+125°C)	Surge voltage (+85°C)	Impedance (max)	Capacitance change at			Case size	Part no. M39006/26-			
			+25°C	+85°C and +125°C					-55°C	+85°C	+125°C		Failure rate level (%1,000 hr)			
volts dc	µF	%	µA	µA	%	volts dc	volts dc	ohms	%	%	%		M (1.0)	P (0.1)	R (0.01)	S (0.001)
10	47	20	1	2	18.1	7	11.5	100	-36	+14	+16	T1	0037	0244	0451	0658
10	47	10	1	2	18.1	7	11.5	100	-36	+14	+16	T1	0038	0245	0452	0659
10	47	5	1	2	18.1	7	11.5	100	-36	+14	+16	T1	0039	0246	0453	0660
10	100	20	1	4	15.2	7	11.5	60	-36	+14	+16	T2	0040	0247	0454	0661
10	100	10	1	4	15.2	7	11.5	60	-36	+14	+16	T2	0041	0248	0455	0662
10	100	5	1	4	15.2	7	11.5	60	-36	+14	+16	T2	0042	0249	0456	0663
10	180	20	1	7	54.4	7	11.5	40	-36	+14	+16	T2	0043	0250	0457	0664
10	180	10	1	7	54.4	7	11.5	40	-36	+14	+16	T2	0044	0251	0458	0665
10	180	5	1	7	54.4	7	11.5	40	-36	+14	+16	T2	0045	0252	0459	0666
10	250	20	2	10	37.8	7	11.5	30	-40	+14	+16	T3	0046	0253	0460	0667
10	250	10	2	10	37.8	7	11.5	30	-40	+14	+16	T3	0047	0254	0461	0668
10	250	5	2	10	37.8	7	11.5	30	-40	+14	+16	T3	0048	0255	0462	0669
10	390	20	2	16	87.6	7	11.5	25	-64	+17.5	+20	T3	0049	0256	0463	0670
10	390	10	2	16	87.6	7	11.5	25	-64	+17.5	+20	T3	0050	0257	0464	0671
10	390	5	2	16	87.6	7	11.5	25	-64	+17.5	+20	T3	0051	0258	0465	0672
10	750	20	4	16	56.5	7	11.5	23	-80	+25	+25	T4	0052	0259	0466	0673
10	750	10	4	16	56.5	7	11.5	23	-80	+25	+25	T4	0053	0260	0467	0674
15	15	20	1	2	5.7	10	17.2	155	-24	+10.5	+12	T1	0054	0261	0468	0675
15	15	10	1	2	5.7	10	17.2	155	-24	+10.5	+12	T1	0055	0262	0469	0676
15	15	5	1	2	5.7	10	17.2	155	-24	+10.5	+12	T1	0056	0263	0470	0677
15	33	20	1	2	12.5	10	17.2	90	-28	+14	+16	T1	0057	0264	0471	0678
15	33	10	1	2	12.5	10	17.2	90	-28	+14	+16	T1	0058	0265	0472	0679
15	33	5	1	2	12.5	10	17.2	90	-28	+14	+16	T1	0059	0266	0473	0680
15	70	20	1	4	13.1	10	17.2	75	-28	+14	+16	T2	0060	0267	0474	0681
15	70	10	1	4	13.1	10	17.2	75	-28	+14	+16	T2	0061	0268	0475	0682
15	70	5	1	4	13.1	10	17.2	75	-28	+14	+16	T2	0062	0269	0476	0683
15	120	20	1	7	36.8	10	17.2	50	-28	+17.5	+20	T2	0063	0270	0477	0684
15	120	10	1	7	36.8	10	17.2	50	-28	+17.5	+20	T2	0064	0271	0478	0685
15	120	5	1	7	36.8	10	17.2	50	-28	+17.5	+20	T2	0065	0272	0479	0686
15	170	20	2	10	25.4	10	17.2	35	-32	+14	+16	T3	0066	0273	0480	0687
15	170	10	2	10	25.4	10	17.2	35	-32	+14	+16	T3	0067	0274	0481	0688
15	170	5	2	10	25.4	10	17.2	35	-32	+14	+16	T3	0068	0275	0482	0689
15	270	20	2	16	60.9	10	17.2	30	-56	+17.5	+20	T3	0069	0276	0483	0690
15	270	10	2	16	60.9	10	17.2	30	-56	+17.5	+20	T3	0070	0277	0484	0691
15	270	5	2	16	60.9	10	17.2	30	-56	+17.5	+20	T3	0071	0278	0485	0692
15	540	20	6	24	49.0	10	17.2	23	-80	+25	+25	T4	0072	0279	0486	0693
15	540	10	6	24	49.0	10	17.2	23	-80	+25	+25	T4	0073	0280	0487	0694

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:19Z
Check the source to verify that this is the current version before use.

TABLE I. Capacitor characteristics - Continued.

Rated voltage (+85°C)	Cap.	Cap. tolerance + or -	DC leakage (max)		Dissipation factor (max)	Derated voltage (+125°C)	Surge voltage (+85°C)	Impedance (max)	Capacitance change at			Case size	Part no. M39006/26-			
			+25°C	+85°C and +125°C					-55°C	+85°C	+125°C		Failure rate level (%1,000 hr)			
volts dc	µF	%	µA	µA	%	volts dc	volts dc	ohms	%	%	%		M (1.0)	P (0.1)	R (0.01)	S (0.001)
25	10	20	1	2	4.6	15	28.8	220	-16	+8	+9	T1	0074	0281	0488	0695
25	10	10	1	2	4.6	15	28.8	220	-16	+8	+9	T1	0075	0282	0489	0696
25	10	5	1	2	4.6	15	28.8	220	-16	+8	+9	T1	0076	0283	0490	0697
25	22	20	1	2	8.3	15	28.8	140	-20	+10.5	+12	T1	0077	0284	0491	0698
25	22	10	1	2	8.3	15	28.8	140	-20	+10.5	+12	T1	0078	0285	0492	0699
25	22	5	1	2	8.3	15	28.8	140	-20	+10.5	+12	T1	0079	0286	0493	0700
25	100	20	1	10	31.4	15	28.8	50	-28	+13	+15	T2	0080	0287	0494	0701
25	100	10	1	10	31.4	15	28.8	50	-28	+13	+15	T2	0081	0288	0495	0702
25	100	5	1	10	31.4	15	28.8	50	-28	+13	+15	T2	0082	0289	0496	0703
25	180	20	2	18	54.3	15	28.8	32	-48	+13	+15	T3	0083	0290	0497	0704
25	180	10	2	18	54.3	15	28.8	32	-48	+13	+15	T3	0084	0291	0498	0705
25	180	5	2	18	54.3	15	28.8	32	-48	+13	+15	T3	0085	0292	0499	0706
25	350	20	7	28	35.0	15	28.8	24	-70	+25	+25	T4	0086	0293	0500	0707
25	350	10	7	28	35.0	15	28.8	24	-70	+25	+25	T4	0087	0294	0501	0708
30	8	20	1	2	4.5	20	34.5	275	-16	+8	+12	T1	0088	0295	0502	0709
30	8	10	1	2	4.5	20	34.5	275	-16	+8	+12	T1	0089	0296	0503	0710
30	8	5	1	2	4.5	20	34.5	275	-16	+8	+12	T1	0090	0297	0504	0711
30	15	20	1	2	9.1	20	34.5	175	-20	+10.5	+12	T1	0091	0298	0505	0712
30	15	10	1	2	9.1	20	34.5	175	-20	+10.5	+12	T1	0092	0299	0506	0713
30	15	5	1	2	9.1	20	34.5	175	-20	+10.5	+12	T1	0093	0300	0507	0714
30	40	20	1	5	12.2	20	34.5	65	-24	+10.5	+12	T2	0094	0301	0508	0715
30	40	10	1	5	12.2	20	34.5	65	-24	+10.5	+12	T2	0095	0302	0509	0716
30	40	5	1	5	12.2	20	34.5	65	-24	+10.5	+12	T2	0096	0303	0510	0717
30	68	20	1	8	31.0	20	34.5	60	-24	+13	+15	T2	0097	0304	0511	0718
30	68	10	1	8	31.0	20	34.5	60	-24	+13	+15	T2	0098	0305	0512	0719
30	68	5	1	8	31.0	20	34.5	60	-24	+13	+15	T2	0099	0306	0513	0720
30	100	20	2	12	19.0	20	34.5	40	-28	+10.5	+12	T3	0100	0307	0514	0721
30	100	10	2	12	19.0	20	34.5	40	-28	+10.5	+12	T3	0101	0308	0515	0722
30	100	5	2	12	19.0	20	34.5	40	-28	+10.5	+12	T3	0102	0309	0516	0723
30	150	20	2	18	46.0	20	34.5	35	-48	+13	+15	T3	0103	0310	0517	0724
30	150	10	2	18	46.0	20	34.5	35	-48	+13	+15	T3	0104	0311	0518	0725
30	150	5	2	18	46.0	20	34.5	35	-48	+13	+15	T3	0105	0312	0519	0726
30	300	20	8	32	35.0	20	34.5	25	-60	+25	+25	T4	0106	0313	0520	0727
30	300	10	8	32	35.0	20	34.5	25	-60	+25	+25	T4	0107	0314	0521	0728
50	5	20	1	2	3.4	30	57.7	400	-16	+5	+6	T1	0108	0315	0522	0729
50	5	10	1	2	3.4	30	57.7	400	-16	+5	+6	T1	0109	0316	0523	0730
50	5	5	1	2	3.4	30	57.7	400	-16	+5	+6	T1	0110	0317	0524	0731

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:19Z
Check the source to verify that this is the current version before use.

TABLE I. Capacitor characteristics - Continued.

Rated voltage (+85°C)	Cap.	Cap. tolerance + or -	DC leakage (max)		Dissipation factor (max)	Derated voltage (+125°C)	Surge voltage (+85°C)	Impedance (max)	Capacitance change at			Case size	Part no. M39006/26-			
			+25°C	+85°C and +125°C					-55°C	+85°C	+125°C		Failure rate level (%1,000 hr)			
volts dc	µF	%	µA	µA	%	volts dc	volts dc	ohms	%	%	%		M (1.0)	P (0.1)	R (0.01)	S (0.001)
50	10	20	1	2	6.0	30	57.5	250	-24	+8	+9	T1	0111	0318	0525	0732
50	10	10	1	2	6.0	30	57.5	250	-24	+8	+9	T1	0112	0319	0526	0733
50	10	5	1	2	6.0	30	57.5	250	-24	+8	+9	T1	0113	0320	0527	0734
50	25	20	1	5	11.2	30	57.5	95	-20	+10.5	+12	T2	0114	0321	0528	0735
50	25	10	1	5	11.2	30	57.5	95	-20	+10.5	+12	T2	0115	0322	0529	0736
50	25	5	1	5	11.2	30	57.5	95	-20	+10.5	+12	T2	0116	0323	0530	0737
50	47	20	1	9	21.4	30	57.5	70	-28	+13	+15	T2	0117	0324	0531	0738
50	47	10	1	9	21.4	30	57.5	70	-28	+13	+15	T2	0118	0325	0532	0739
50	47	5	1	9	21.4	30	57.5	70	-28	+13	+15	T2	0119	0326	0533	0740
50	60	20	2	12	13.6	30	57.5	45	-16	+10.5	+12	T3	0120	0327	0534	0741
50	60	10	2	12	13.6	30	57.5	45	-16	+10.5	+12	T3	0121	0328	0535	0742
50	60	5	2	12	13.6	30	57.5	45	-16	+10.5	+12	T3	0122	0329	0536	0743
50	82	20	2	16	24.9	30	57.5	45	-32	+13	+15	T3	0123	0330	0537	0744
50	82	10	2	16	24.9	30	57.5	45	-32	+13	+15	T3	0124	0331	0538	0745
50	82	5	2	16	24.9	30	57.5	45	-32	+13	+15	T3	0125	0332	0539	0746
50	160	20	8	32	25.7	30	57.5	27	-50	+25	+25	T4	0126	0333	0540	0747
50	160	10	8	32	25.7	30	57.5	27	-50	+25	+25	T4	0127	0334	0541	0748
60	4	20	1	2	3.0	40	69.0	550	-16	+5	+6	T1	0128	0335	0542	0749
60	4	10	1	2	3.0	40	69.0	550	-16	+5	+6	T1	0129	0336	0543	0750
60	4	5	1	2	3.0	40	69.0	550	-16	+5	+6	T1	0130	0337	0544	0751
60	8.2	20	1	2	5.0	40	69.0	275	-28	+8	+9	T1	0131	0338	0545	0752
60	8.2	10	1	2	5.0	40	69.0	275	-28	+8	+9	T1	0132	0339	0546	0753
60	8.2	5	1	2	5.0	40	69.0	275	-28	+8	+9	T1	0133	0340	0547	0754
60	20	20	1	5	7.6	40	69.0	105	-16	+10.5	+9	T2	0134	0341	0548	0755
60	20	10	1	5	7.6	40	69.0	105	-16	+10.5	+12	T2	0135	0342	0549	0756
60	20	5	1	5	7.6	40	69.0	105	-16	+10.5	+12	T2	0136	0343	0550	0757
60	39	20	1	9	20.7	40	69.0	90	-28	+10.5	+12	T2	0137	0344	0551	0758
60	39	10	1	9	20.7	40	69.0	90	-28	+10.5	+12	T2	0138	0345	0552	0759
60	39	5	1	9	20.7	40	69.0	90	-28	+10.5	+12	T2	0139	0346	0553	0760
60	50	20	2	12	15.3	40	69.0	50	-16	+10.5	+12	T3	0140	0347	0554	0761
60	50	10	2	12	15.3	40	69.0	50	-16	+10.5	+12	T3	0141	0348	0555	0762
60	50	5	2	12	15.3	40	69.0	50	-16	+10.5	+12	T3	0142	0349	0556	0763
60	68	20	2	16	30.7	40	69.0	50	-32	+10.5	+12	T3	0143	0350	0557	0764
60	68	10	2	16	30.7	40	69.0	50	-32	+10.5	+12	T3	0144	0351	0558	0765
60	68	5	2	16	30.7	40	69.0	50	-32	+10.5	+12	T3	0145	0352	0559	0766
60	140	20	8	32	25.7	40	69.0	28	-40	+20	+20	T4	0146	0353	0560	0768
60	140	10	8	32	25.7	40	69.0	28	-40	+20	+20	T4	0147	0354	0561	0769

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:19Z
Check the source to verify that this is the current version before use.

TABLE I. Capacitor characteristics - Continued.

Rated voltage (+85°C)	Cap.	Cap. tolerance + or -	DC leakage (max)		Dissipation factor (max)	Derated voltage (+125°C)	Surge voltage (+85°C)	Impedance (max)	Capacitance change at			Case size	Part no. M39006/26 - Failure rate level (%1,000 hr)			
			+25°C	+85°C and +125°C					-55°C	+85°C	+125°C		M (1.0)	P (0.1)	R (0.01)	S (0.001)
volts dc	µF	%	µA	µA	%	volts dc	volts dc	ohms	%	%	%					
75	3.5	20	1	2	2.5	50	86.2	650	-16	+5	+6	T1	0148	0355	0562	0770
75	3.5	10	1	2	2.5	50	86.2	650	-16	+5	+6	T1	0149	0356	0563	0771
75	3.5	5	1	2	2.5	50	86.2	650	-16	+5	+6	T1	0150	0357	0564	0772
75	6.8	20	1	2	4.1	50	86.2	300	-20	+5	+9	T1	0151	0358	0565	0773
75	6.8	10	1	2	4.1	50	86.2	300	-20	+5	+9	T1	0152	0359	0566	0774
75	6.8	5	1	2	4.1	50	86.2	300	-20	+5	+9	T1	0153	0360	0567	0775
75	15	20	1	5	7.5	50	86.2	150	-16	+5	+9	T2	0154	0361	0568	0776
75	15	10	1	5	7.5	50	86.2	150	-16	+5	+9	T2	0155	0362	0569	0777
75	15	5	1	5	7.5	50	86.2	150	-16	+5	+9	T2	0156	0363	0570	0778
75	33	20	1	10	17.5	50	86.2	90	-24	+5	+15	T2	0157	0364	0571	0779
75	33	10	1	10	17.5	50	86.2	90	-24	+5	+15	T2	0158	0365	0572	0780
75	33	5	1	10	17.5	50	86.2	90	-24	+5	+15	T2	0159	0366	0573	0781
75	40	20	2	12	15.2	50	86.2	60	-16	+5	+12	T3	0160	0367	0574	0782
75	40	10	2	12	15.2	50	86.2	60	-16	+5	+12	T3	0161	0368	0575	0783
75	40	5	2	12	15.2	50	86.2	60	-16	+5	+12	T3	0162	0369	0576	0784
75	56	20	2	17	26.0	50	86.2	60	-28	+5	+15	T3	0163	0370	0577	0785
75	56	10	2	17	26.0	50	86.2	60	-28	+5	+15	T3	0164	0371	0578	0786
75	56	5	2	17	26.0	50	86.2	60	-28	+5	+15	T3	0165	0372	0579	0787
75	110	20	9	36	25.7	50	86.2	29	-35	+5	+20	T4	0166	0373	0580	0788
75	110	10	9	36	25.7	50	86.2	29	-35	+5	+20	T4	0167	0374	0581	0789
100	2.5	20	1	2	5.0	65	115	950	-16	+5	+8	T1	0168	0375	0582	0790
100	2.5	10	1	2	5.0	65	115	950	-16	+5	+8	T1	0169	0376	0583	0791
100	2.5	5	1	2	5.0	65	115	950	-16	+5	+8	T1	0170	0377	0584	0792
100	4.7	20	1	2	3.6	65	115	500	-16	+5	+8	T1	0171	0378	0585	0793
100	4.7	10	1	2	3.6	65	115	500	-16	+5	+8	T1	0172	0379	0586	0794
100	4.7	5	1	2	3.6	65	115	500	-16	+5	+8	T1	0173	0380	0587	0795
100	11	20	1	4	5.0	65	115	200	-16	+5	+8	T2	0174	0381	0588	0796
100	11	10	1	4	5.0	65	115	200	-16	+5	+8	T2	0175	0382	0589	0797
100	11	5	1	4	5.0	65	115	200	-16	+5	+8	T2	0176	0383	0590	0798
100	22	20	1	9	11.8	65	115	100	-16	+5	+8	T2	0177	0384	0591	0799
100	22	10	1	9	11.8	65	115	100	-16	+5	+8	T2	0178	0385	0592	0800
100	22	5	1	9	11.8	65	115	100	-16	+5	+8	T2	0179	0386	0593	0801
100	30	20	2	12	9.1	65	115	80	-16	+5	+8	T3	0180	0387	0594	0802
100	30	10	2	12	9.1	65	115	80	-16	+5	+8	T3	0181	0388	0595	0803
100	30	5	2	12	9.1	65	115	80	-16	+5	+8	T3	0182	0389	0596	0804
100	43	20	2	17	19.7	65	115	70	-20	+5	+8	T3	0183	0390	0597	0805
100	43	10	2	17	19.7	65	115	70	-20	+5	+8	T3	0184	0391	0598	0806
100	43	5	2	17	19.7	65	115	70	-20	+5	+8	T3	0185	0392	0599	0807

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:19Z
Check the source to verify that this is the current version before use.

TABLE I. Capacitor characteristics - Continued.

Rated voltage (+85°C)	Cap.	Cap. tolerance + or -	DC leakage (max)		Dissipation factor (max)	Derated voltage (+125°C)	Surge voltage (+85°C)	Impedance (max)	Capacitance change at			Case size	Part no. M39006/26-			
			+25°C	+85°C and +125°C									Failure rate level (%1,000 hr)			
									-55°C	+85°C	+125°C		M	P	R	S
volts dc	µF	%	µA	µA	%	volts dc	volts dc	ohms	%	%	%		(1.0)	(0.1)	(0.01)	(0.001)
100	86	20	9	36	20.7	65	115	30	-25	+15	+15	T4	0186	0393	0600	0808
100	86	10	9	36	20.7	65	115	30	-25	+15	+15	T4	0187	0394	0601	0809
125	1.7	20	1	2	7.0	85	144	1250	-16	+7	+8	T1	0188	0395	0602	0810
125	1.7	10	1	2	7.0	85	144	1250	-16	+7	+8	T1	0189	0396	0603	0811
125	1.7	5	1	2	7.0	85	144	1250	-16	+7	+8	T1	0190	0397	0604	0812
125	3.6	20	1	2	4.1	85	144	600	-16	+7	+8	T1	0191	0398	0605	0813
125	3.6	10	1	2	4.1	85	144	600	-16	+7	+8	T1	0192	0399	0606	0814
125	3.6	5	1	2	4.1	85	144	600	-16	+7	+8	T1	0193	0400	0607	0815
125	9	20	1	5	10.2	85	144	240	-16	+7	+8	T2	0194	0401	0608	0816
125	9	10	1	5	10.2	85	144	240	-16	+7	+8	T2	0195	0402	0609	0817
125	9	5	1	5	10.2	85	144	240	-16	+7	+8	T2	0196	0403	0610	0818
125	14	20	1	7	12.7	85	144	167	-16	+7	+8	T2	0197	0404	0611	0819
125	14	10	1	7	12.7	85	144	167	-16	+7	+8	T2	0198	0405	0612	0820
125	14	5	1	7	12.7	85	144	167	-16	+7	+8	T2	0199	0406	0613	0821
125	18	20	2	9	15.0	85	144	129	-16	+7	+8	T3	0200	0407	0614	0822
125	18	10	2	9	15.0	85	144	129	-16	+7	+8	T3	0201	0408	0615	0823
125	18	5	2	9	15.0	85	144	129	-16	+7	+8	T3	0202	0409	0616	0824
125	25	20	2	13	19.0	85	144	93	-16	+7	+8	T3	0203	0410	0617	0825
125	25	10	2	13	19.0	85	144	93	-16	+7	+8	T3	0204	0411	0618	0826
125	25	5	2	13	19.0	85	144	93	-16	+7	+8	T3	0205	0412	0619	0827
125	56	20	10	40	17.5	85	144	32	-25	+15	+15	T4	0206	0413	0620	0828
125	56	10	10	40	17.5	85	144	32	-25	+15	+15	T4	0207	0414	0621	0829

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:19Z
Check the source to verify that this is the current version before use.

Salt spray (corrosion): Method 101 of MIL-STD-202, condition B (48 hours).

Solderability: Method 208 of MIL-STD-202.

Terminal strength: Pull, method 211 of MIL-STD-202, condition A.

Wire-lead-bend: In accordance with MIL-C-39006.

Surge voltage: See table I.

Moisture resistance: Method 106 of MIL-STD-202.

DCL: 125 percent (max) of +25°C value of table I.

ΔCap: Within ±8 percent of initial measurement.

DF: 115 percent (max) of initial requirement.

Dielectric withstanding voltage (DWV): Method 301 of MIL-STD-202. 2,000 V dc minimum.

Insulation resistance (IR) method 302 of MIL-STD-202, condition B. 100 megohms minimum.

Low temperature (storage): Method 502 of MIL-STD-810.

DCL: See table I.

ΔCap: Within ±5 percent of initial measurement.

DF: See table I.

Stability at low and high temperatures:

Step 1 (+25°C):

DCL: See table I.

Cap: Within tolerance of table I value.

DF: See table I.

Step 2 (-55°C):

Imp.: See table I.

ΔCap: See table I.

Step 3 (+25°C):

DCL: See table I.

ΔCap: Within ±5 percent of step 1 value.

DF: See table I.

Step 4 (+85°C):

DCL: See table I.

ΔCap: See table I.

DF: See table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:19Z
Check the source to verify that this is the current version before use.

Step 5 (+125°C):

DCL: See table I.

ΔCap: See table I.

DF: See table I.

Step 6 (+25°C):

DCL: See table I.

ΔCap: Within ±5 percent of step 1 value.

DF: See table I.

Reverse voltage: Capacitors shall withstand a dc potential of 1 volt, applied in the reverse direction, for 125 ±10 hours. The ambient temperature during the test shall be +85°C. Capacitors shall be maintained at +85°C and dc rated voltage shall be applied in the forward direction for 125 ±10 hours. Capacitors shall then be returned to room ambient temperature and the dc leakage, capacitance, and dissipation factor shall be measured as specified in MIL-C-39006.

DCL: See table I.

ΔCap: Within ±10 percent of initial measurement.

DF: See table I.

Life at +85°C: Method 108 of MIL-STD-202. 2,000 hour (qualification):

DCL: See table I.

ΔCap: Within ±10 percent of initial measurement.

DF: See table I.

10,000 hour (group B) and extended life:

DCL: (+85°C), 125 percent (max) of table I value.

DCL: (+25°C), See table I.

ΔCap: Within +10 percent, -20 percent of initial measurement.

DF: 200 percent (max) of table I value.

DWV: 2,000 V dc, minimum.

IR: 100 megohms, minimum.

Vacuum life (at +85°C):

DCL: See table I.

ΔCap: Within ±20 percent of initial measurement.

DF: See table I.

Weight loss: 4.1 milligrams, maximum.

Source: https://assist.dla.mil Downloaded: 2026-10-21T16:19Z
Check the source to verify that this is the current version before use.

Life at +125°C: Method 108 of MIL-STD-202.

DCL: 125 percent (max) of table I value.

ΔCap: Within ±10 percent, -20 percent of initial measurement.

DF: 200 percent (max) of table I value.

DWV: 2,000 V dc, minimum.

IR: 100 megohms, minimum.

10,000 hour (group B):

DCL: (+125°C), 125 percent (max) of table I value.

DCL: (+25°C), See table I.

ΔCap: Within +10 percent, -30 percent of initial measurement.

DF: 400 percent (max) of table I value.

DWV: 2,000 V dc, minimum.

IR: 100 megohms, minimum.

Barometric pressure: Method 105 of MIL-STD-202, condition E (150,000 feet).

Test voltage: Rated voltage.

Fungus: Method 508 of MIL-STD-810.

Resistance to solvents: Method 215 of MIL-STD-202.

Resistance to soldering heat: Method 210 of MIL-STD-202, condition B.

DCL: See table I.

ΔCap: Within ±5 percent of initial measurement.

DF: See table I value.

Marking: In accordance with MIL-C-39006.

Polarity: Series of plus (+) symbols encircling positive end (see figure 1).

Voltage groups (+85°C rated voltage):

I - - - - - 6 to 15 V inclusive.

II - - - - - 25 to 75 V inclusive.

III - - - - - 100 and 125 V.

Preparing activity:
Air Force - 11

Agent:
DLA - ES

(Project 5910-F408)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:19Z
Check the source to verify that this is the current version before use.