INCH-POUND

MIL-C-39006/3D
23 December 1992
SUPERSEDING
MIL-C-39006/3C
10 January 1972

MILITARY SPECIFICATION SHEET

CAPACITORS, FIXED, ELECTROLYTIC (NONSOLID ELECTROLYTE), TANTALUM, (POLARIZED, PLAIN FOIL), 85°C (VOLTAGE DERATED TO 125°C), ESTABLISHED RELIABILITY, STYLE CLR35

This specification is approved for use by all Departments and Agencies of the Department of Defense.

(D) CAUTIONARY NOTE: THESE CAPACITORS MAY EXPLODE IF SUBJECTED TO REVERSE VOLTAGES. WHEN FIRST TESTED FOR DC LEAKAGE OR AT OTHER HIGH POTENTIALS, EXERCISE CAUTION TO VERIFY CORRECT POLARITY MARKINGS.

(D) FAILURE RATE LEVEL "L" IS INACTIVE FOR NEW DESIGN AFTER 27 May 1976

(D) CASE SIZE E1 IS INACTIVE FOR NEW DESIGN AFTER 20 October 1978

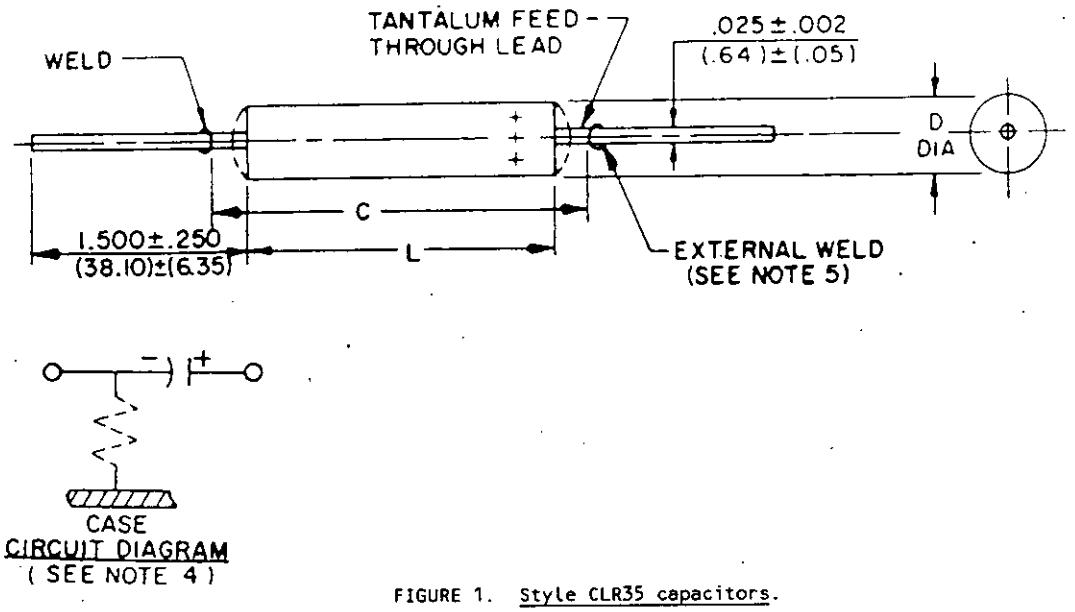


FIGURE 1. Style CLR35 capacitors.

(D) denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:14Z
Check the source to verify that this is the current version before use.

(D)

Case size	Dimensions			
	Basic case		Insulated case	C max
	L 1/ ±.062 (1.57)	D ±.016 (0.41)	D max	
E1	.688 (17.48)	.188 (4.78)	.219 (5.56)	1.188 (30.18)
G1	.688 (17.48)	.188 (4.78)	.219 (5.56)	1.188 (30.18)
G2	.969 (24.61)	.281 (7.14)	.312 (7.92)	1.469 (37.31)
G3	1.438 (36.53)	.375 (9.52)	.406 (10.31)	1.938 (49.23)
G4	2.125 (53.98)	.375 (9.52)	.406 (10.31)	2.625 (66.68)
G5	2.750 (69.85)	.375 (9.52)	.406 (10.31)	3.250 (82.55)

1/ Length of basic case; sleeving shall be as specified in MIL-C-39006.

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are in parentheses.
3. Metric equivalents are given for general information only.
4. There is an indeterminate resistance between the metal case and the negative terminal.
5. The weld shall not be enclosed in the end seal.

FIGURE 1. Style CLR35 capacitors - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:14Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Design and construction:

Dimensions and configuration: See figure 1.

Case type: Tubular, insulated.

Seal type: G (hermetic) or E (nonhermetic) as shown in table I.

Terminals: Axial-wire lead.

Rated temperature: -55° to +85°C, voltage derated to +125°C (see figure 2).

Rated voltage: See table I.

Capacitance (Cap.) (nom): See table I.

Cap. tolerance: See table I.

Failure rate (FR) level: See table I.

Constant voltage conditioning: As specified in MIL-C-39006.

DC leakage (DCL) (max) (at 25°C): See table I.

Cap. (nom): Method 305 of MIL-STD-202. See table I.

Dissipation factor (DF) (max): 10%.

Seal (G seal type only): Method 112 of MIL-STD-202, conditions A or D, and C.

Shock (specified pulse): Method 213 of MIL-STD-202, condition I (100 G).

Vibration, high frequency: Method 204 of MIL-STD-202, condition D (20 G).

(D) Vibration, random (when applicable): Method 214 of MIL-STD-202, test condition II-E (18.7 g).

(D) Thermal shock: Method 107 of MIL-STD-202, condition A (with step 3 at 125°C). Number of cycles - 30.

DCL - 125% (max) of 25°C value of table I.

ΔCap. - Within ±5% of initial measurement.

DF - 115% (max) of initial requirement.

Salt spray (corrosion): Method 101 of MIL-STD-202, condition B (48 hours).

Solderability: Method 208 of MIL-STD-202.

Terminal strength:

Pull: Method 211 of MIL-STD-202, condition A.

Wire-lead bend: In accordance with MIL-C-39006.

Surge voltage: See table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:14Z
Check the source to verify that this is the current version before use.

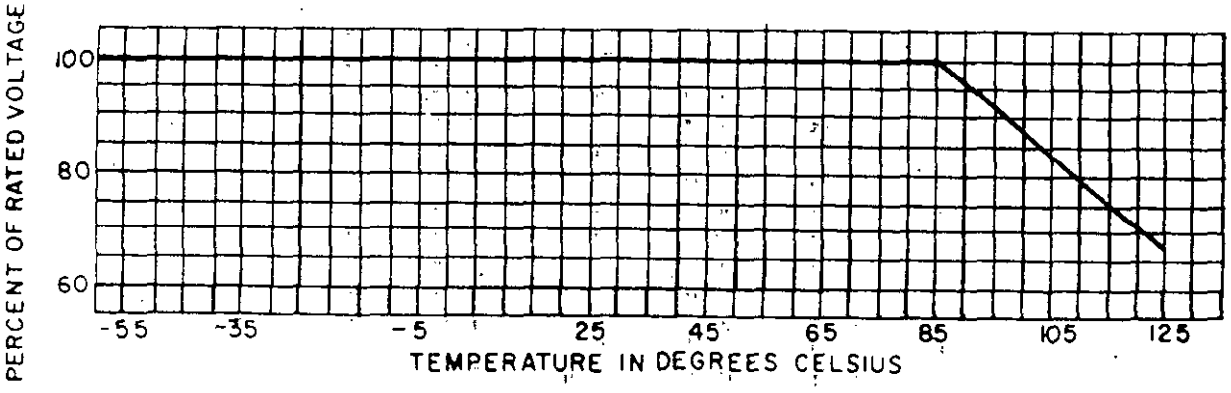


FIGURE 2. Voltage derating with temperature.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:14Z
Check the source to verify that this is the current version before use.

(D)

TABLE I. Capacitor characteristics.

Rated voltage (85°C)	Cap.	Cap. tolerance	DC leakage (max)		Derated voltage (125°C)	Surge voltage (85°C)	Impedance (max)	Case size	PIN M39006/03- 1/				
			25°C	85°C and 125°C					failure rate level (%/1,000 hr)				
									L(2.0)	M(1.0)	P(0.1)	R(0.01)	S(0.001)
HERMETICALLY-SEALED													
volts, dc	µF	%	µA	µA	volts, dc	volts, dc	ohms						
15	4.5	±20	1	2	10	17.2	495	G1	2700	2712_	2724_	2736_	2748_
15	18.0	±20	2	4	10	17.2	125	G2	1300	1349_	1398_	1447_	1496_
15	55.0	±20	2	10	10	17.2	41	G3	1301	1350_	1399_	1448_	1497_
15	110.0	±20	4	20	10	17.2	20	G4	1302	1351_	1400_	1449_	1498_
15	160.0	±20	5	30	10	17.2	14	G5	1303	1352_	1401_	1450_	1499_
25	3.0	±20	1	2	15	28.8	744	G1	2701	2713_	2725_	2737_	2749_
25	12.0	±20	2	4	15	28.8	186	G2	1304	1353_	1402_	1451_	1500_
25	35.0	±20	2	10	15	28.8	64	G3	1305	1354_	1403_	1452_	1501_
25	70.0	±20	4	20	15	28.8	32	G4	1306	1355_	1404_	1453_	1502_
25	100.0	±20	6	30	15	28.8	23	G5	1307	1356_	1405_	1454_	1503_
30	2.5	±20	2	5	20	34.5	893	G1	2702	2714_	2726_	2738_	2750_
30	10.0	±20	2	6	20	34.5	265	G2	1308	1357_	1406_	1455_	1504_
30	30.0	±20	2	13	20	34.5	75	G3	1309	1358_	1407_	1456_	1505_
30	60.0	±20	4	26	20	34.5	37	G4	1310	1359_	1408_	1457_	1506_
30	85.0	±20	6	38	20	34.5	27	G5	1311	1360_	1409_	1458_	1507_
35	68.0	±20	5	25	25	40.2	40	G5	1312	1361_	1410_	1459_	1508_
50	1.5	±20	1	4	30	57.5	1487	G1	2703	2715_	2727_	2739_	2751_
50	6.0	±20	2	6	30	57.5	372	G2	1313	1362_	1411_	1460_	1509_
50	20.0	±20	2	13	30	57.5	112	G3	1314	1363_	1412_	1461_	1510_
50	40.0	±20	4	26	30	57.5	56	G4	1315	1364_	1413_	1462_	1511_
50	55.0	±20	6	38	30	57.5	41	G5	1316	1365_	1414_	1463_	1512_
75	1.0	±20	1	4	50	86.2	2232	G1	2704	2716_	2728_	2740_	2752_
75	4.0	±20	2	6	50	86.2	558	G2	1317	1366_	1415_	1464_	1513_
75	14.0	±20	2	13	50	86.2	159	G3	1318	1367_	1416_	1465_	1514_
75	28.0	±20	4	26	50	86.2	83	G4	1319	1368_	1417_	1466_	1515_
75	40.0	±20	6	38	50	86.2	56	G5	1320	1369_	1418_	1467_	1516_

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:14Z
Check the source to verify that this is the current version before use.

(D)

TABLE I. Capacitor characteristics - Continued.

Rated voltage (85°C)	Cap.	Cap. tolerance	DC leakage (max)		Derated voltage (125°C)	Surge voltage (85°C)	Impedance (max)	Case size	PIN M39006/03- 1/				
			25°C	85°C and 125°C					Failure rate level (%/1,000 hr)				
									L(2.0)	M(1.0)	P(0.1)	R(0.01)	S(0.001)
HERMETICALLY-SEALED													
volts, dc	µF	%	µA	µA	volts, dc	volts, dc	ohms						
100	0.8	±20	1	3.5	65	115.0	2790	G1	2705	2717_	2729_	2741_	2753_
100	3.0	±20	2	6	65	115.0	743	G2	1321	1370_	1419_	1468_	1517_
100	10.0	±20	2	13	65	115.0	223	G3	1322	1371_	1420_	1469_	1518_
100	20.0	±20	3	25	65	115.0	112	G4	1323	1372_	1421_	1470_	1519_
100	30.0	±20	6	38	65	115.0	74	G5	1324	1373_	1422_	1471_	1520_
150	0.5	±20	2	4	100	172.0	4454	G1	2706	2718_	2730_	2742_	2754_
150	2.0	±20	2	6	100	172.0	1115	G2	1325	1374_	1423_	1472_	1521_
150	7.0	±20	3	13	100	172.0	319	G3	1326	1375_	1424_	1473_	1522_
150	14.0	±20	4	26	100	172.0	159	G4	1327	1376_	1425_	1474_	1523_
150	20.0	±20	6	38	100	172.0	112	G5	1328	1377_	1426_	1475_	1524_
200	0.35	±15	4	25	150	230.0	5577	G1	2707	2719_	2731_	2743_	2755_
200	1.5	±15	8	32	150	230.0	1300	G2	1329	1378_	1427_	1476_	1525_
200	5.0	±15	16	64	150	230.0	400	G3	1330	1379_	1428_	1477_	1526_
200	10.0	±15	28	100	150	230.0	200	G4	1331	1380_	1429_	1478_	1527_
200	15.0	±15	40	160	150	230.0	130	G5	1332	1381_	1430_	1479_	1528_
250	0.3	±15	6	32	165	287.0	6600	G1	2708	2720_	2732_	2744_	2756_
250	1.2	±15	8	40	165	287.0	1600	G2	1333	1382_	1431_	1480_	1529_
250	4.0	±15	16	80	165	287.0	500	G3	1334	1383_	1432_	1481_	1530_
250	8.0	±15	28	140	165	287.0	250	G4	1335	1384_	1433_	1482_	1531_
250	12.0	±15	40	200	165	287.0	160	G5	1336	1385_	1434_	1483_	1532_
300	0.27	±15	6	40	200	345.0	9000	G1	2709	2721_	2733_	2745_	2757_
300	1.0	±15	10	50	200	345.0	2250	G2	1337	1386_	1435_	1484_	1533_
300	3.0	±15	20	100	200	345.0	750	G3	1338	1387_	1436_	1485_	1534_
300	7.0	±15	35	175	200	345.0	322	G4	1339	1388_	1437_	1486_	1535_
300	10.0	±15	50	250	200	345.0	225	G5	1340	1389_	1438_	1487_	1536_

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:14Z
Check the source to verify that this is the current version before use.

TABLE I. Capacitor characteristics - Continued.

Rated voltage (85°C)	Cap.	Cap. tolerance	DC leakage (max)		Derated voltage (125°C)	Surge voltage (85°C)	Impedance (max)	Case size	PIN M39006/03- 1/				
			25°C	85°C and 125°C					Failure rate level (%/1,000 hr)				
									L(2.0)	M(1.0)	P(0.1)	R(0.01)	S(0.001)
HERMETICALLY-SEALED													
volts, dc	µF	%	µA	µA	volts, dc	volts, dc	ohms						
375	0.22	±15	6	80	250	431.0	11,800	G1	2710	2722_	2734_	2746_	2758_
375	0.82	±15	10	100	250	431.0	2810	G2	1341	1390_	1439_	1488_	1537_
375	2.7	±15	20	225	250	431.0	900	G3	1342	1391_	1440_	1489_	1538_
375	5.6	±15	35	250	250	431.0	450	G4	1343	1392_	1441_	1490_	1539_
375	8.2	±15	50	325	250	431.0	281	G5	1344	1393_	1442_	1491_	1540_
450	0.15	±15	8	120	300	518.0	21,400	G1	2711	2723_	2735_	2747_	2759_
450	0.56	±15	10	150	300	518.0	5350	G2	1345	1394_	1443_	1492_	1541_
450	2.2	±15	20	400	300	518.0	1600	G3	1346	1395_	1444_	1493_	1542_
450	3.9	±15	35	800	300	518.0	800	G4	1347	1396_	1445_	1494_	1543_
450	6.8	±15	50	1000	300	518.0	535	G5	1348	1397_	1446_	1495_	1544_
NONHERMETICALLY-SEALED													
15	4.5	±20	1	2	10	17.2	495	E1	2300	2360	2420	2480	2540
25	3.0	±20	1	2	15	28.8	744	E1	2305	2365	2425	2485	2545
30	2.5	±20	2	5	20	34.5	893	E1	2310	2370	2430	2490	2550
50	1.5	±20	1	4	30	57.7	1487	E1	2315	2375	2435	2495	2555
75	1.0	±20	1	4	50	86.2	2232	E1	2320	2380	2440	2500	2560
100	0.8	±20	1	3.5	65	115.0	2790	E1	2325	2385	2445	2505	2565
150	0.5	±20	2	4	100	172.0	4454	E1	2330	2390	2450	2510	2570
200	0.35	±15	4	25	150	230.0	5577	E1	2335	2395	2455	2515	2575
250	0.3	±15	6	32	165	287.0	6600	E1	2340	2400	2460	2520	2580
300	0.27	±15	6	40	200	345.0	9000	E1	2345	2405	2465	2525	2585
375	0.22	±15	6	80	250	431.0	11,800	E1	2350	2410	2470	2530	2590
450	0.15	±15	8	120	300	518.0	21,400	E1	2355	2415	2475	2535	2595

1/ Dash number for failure rate levels M, P, R, and S hermetically-sealed parts shall include the letter "H" to indicate the optional random vibration requirement or the "-" shall be deleted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:14Z
Check the source to verify that this is the current version before use.

Moisture resistance: Method 106 of MIL-STD-202.

DCL - 125% (max) of 25°C value of table I.

ΔCap. - Within ±3% of initial measurement.

DF - 115% (max) of initial requirement.

Dielectric withstanding voltage (DWV): Method 301 of MIL-STD-202. 2,000 V dc, min.

Insulation resistance (IR): Method 302 of MIL-STD-202, condition B. 100 megohms, min.

Low temperature (storage): Method 502 of MIL-STD-810.

DCL - See table I.

ΔCap. - Within ±3% of initial measurement.

DF - 10% (max).

Stability at low and high temperatures:

Step 1 (+25°C):

DCL - See table I.

Cap. - Within tolerance of table I value.

DF - 10% (max).

Step 2 (-55°C):

Imp. - See table I.

(D) ΔCap. --40% (max) of step 1 value.

Step 3 (+25°C):

DCL - See table I.

ΔCap. - Within ±3% of step 1 value.

DF - 10% (max).

Step 4 (+85°C):

DCL - See table I.

ΔCap. - +20% (max) (≤ 50 V) or +15% (max) (> 50 V) of step 1 value.

DF - 20% (max) (≤ 50 V) or 15% (max) (> 50 V).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:14Z
Check the source to verify that this is the current version before use.

Step 5 (+125°C)(125°C derated voltage referenced):

DCL - See table I.

ΔCap. - +25% (max) (≤ 30 V) or +15% (max) (> 30 V) of step 1 value.

DF - 25% (max) (≤ 30 V) or 15% (max) (> 30 V).

Step 6 (+25°C):

DCL - See table I.

ΔCap. - Within ±3% of step 1 value.

DF - 10% (max).

Reverse voltage:

DCL - 125% (max) of 25°C value of table I.

ΔCap. - Within ±10% of initial measurement.

DF - 10% (max).

Life at 85°C: Method 108 of MIL-STD-202.

2,000-hr (qualification):

DCL - See table I.

ΔCap. - Within ±15% (≤ 50 V) or ±10% (> 50 V) of initial measurement.

DF - 10% (max):

(D) 10,000-hr (group B) and extended life:

DCL (85°C) - 125% (max) of table I value.

DCL (25°C) - See table I.

ΔCap. - Within ±25% of initial measurement.

DF - 20% (max).

DWV - 2,000 V dc, min.

IR - 100 megohms, min.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:14Z
Check the source to verify that this is the current version before use.

Life at 125°C: Method 108 of MIL-STD-202 (125°C derated voltage referenced).

Qualification:

DCL - See table I.

ΔCap. - Within ±15% (≤ 30 V) or ±10% (> 30 V) of initial measurement.

DF - 10% (max).

DWV - 2,000 V dc, min.

IR - 100 megohms, min.

(D) 2,000-hr (group C):

DCL (125°C) - 125% (max) of table I value.

DCL (25°C) - See table I.

ΔCap. - Within ±50% of initial measurement for E1 and G1 cases; within ±25% of initial measurement for all other cases.

DF - 40% (max) for E1 and G1 cases; 20% (max) for all other cases.

DWV - 2,000 V dc, min.

IR - 100 megohms, min.

Barometric pressure: Method 105 of MIL-STD-202, condition E (150,000 ft).

Test voltage - Rated voltage.

Fungus: Method 508 of MIL-STD-810.

Resistance to solvents: Method 215 of MIL-STD-202.

Resistance to soldering heat: Method 210 of MIL-STD-202, condition G.

DCL - See table I.

ΔCap. - Within ±3% of initial measurement.

DF - 10% (max).

(D) Marking: In accordance with MIL-C-39006.

Polarity - Series of plus (+) symbols encircling positive end (see figure 1).

Substitutability data for seal types "E" and "G": See tables II and III.

Voltage groups (85°C rated voltage):

I - - - - 15 through 50 V dc
II - - - 75 through 200 V dc
III - - - 250 through 450 V dc

NOTE: The capacitors covered by this specification sheet are considered substitutable for the capacitors listed in table II or III.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:14Z
Check the source to verify that this is the current version before use.

TABLE II. Substitutability data - "G" seal type.

Dash no. in MIL-C-39006/3D, /3C, and /3B					Substitutable for dash no. in														
					MIL-C-39006/3A					MIL-C-39006/3 1/					MIL-C-39006/7 2/				
L	M	P	R	S	L	M	P	R	S	L	M	P	R	S	L	M	P	R	S
1300	1349	1398	1447	1496	1001	1043	1085	1127	1169	0006	0007	0008	0009	0010	0001	0002	0003	0004	0005
1301	1350	1399	1448	1497	1002	1044	1086	1128	1170	0011	0012	0013	0014	0015	0006	0007	0008	0009	0010
1302	1351	1400	1449	1498	1003	1045	1087	1129	1171	0016	0017	0018	0019	0020	None	None	None	None	None
1303	1352	1401	1450	1499	1004	1046	1088	1130	1172	0021	0022	0023	0024	0025	0011	0012	0013	0014	0015
1304	1353	1402	1451	1500	1005	1047	1089	1131	1173	0031	0032	0033	0034	0035	None	None	None	None	None
1305	1354	1403	1452	1501	1006	1048	1090	1132	1174	0036	0037	0038	0039	0040	None	None	None	None	None
1306	1355	1404	1453	1502	1007	1049	1091	1133	1175	0041	0042	0043	0044	0045	None	None	None	None	None
1307	1356	1405	1454	1503	1008	1050	1092	1134	1176	0046	0047	0048	0049	0050	None	None	None	None	None
1308	1357	1406	1455	1504	1009	1051	1093	1135	1177	None	None	None	None	None	0016	0017	0018	0019	0020
1309	1358	1407	1456	1505	None	None	None	None	None	None	None	None	None	None	None	None	None	None	None
1310	1359	1408	1457	1506	None	None	None	None	None	None	None	None	None	None	None	None	None	None	None
1311	1360	1409	1458	1507	None	None	None	None	None	None	None	None	None	None	None	None	None	None	None
1312	1361	1410	1459	1508	1010	1052	1094	1136	1178	None	None	None	None	None	None	None	None	None	None
1313	1362	1411	1460	1509	1011	1053	1095	1137	1179	0056	0057	0058	0059	0060	0031	0032	0033	0034	0035
1314	1363	1412	1461	1510	1012	1054	1096	1138	1180	0061	0062	0063	0064	0065	0036	0037	0038	0039	0040
1315	1364	1413	1462	1511	1013	1055	1097	1139	1181	0066	0067	0068	0069	0070	None	None	None	None	None
1316	1365	1414	1463	1512	1014	1056	1098	1140	1182	0071	0072	0073	0074	0075	0041	0042	0043	0044	0045
1317	1366	1415	1464	1513	1015	1057	1099	1141	1183	0081	0082	0083	0084	0085	0046	0047	0048	0049	0050
1318	1367	1416	1465	1514	1016	1058	1100	1142	1184	0086	0087	0088	0089	0090	0051	0052	0053	0054	0055
1319	1368	1417	1466	1515	1017	1059	1101	1143	1185	0091	0092	0093	0094	0095	None	None	None	None	None
1320	1369	1418	1467	1516	1018	1060	1102	1144	1186	0096	0097	0098	0099	0100	0056	0057	0058	0059	0060
1321	1370	1419	1468	1517	1019	1061	1103	1145	1187	0106	0107	0108	0109	0110	0061	0062	0063	0064	0065
1322	1371	1420	1469	1518	1020	1062	1104	1146	1188	0111	0112	0113	0114	0115	0066	0067	0068	0069	0070
1323	1372	1421	1470	1519	1021	1063	1105	1147	1189	0116	0117	0118	0119	0120	None	None	None	None	None
1324	1373	1422	1471	1520	1022	1064	1106	1148	1190	0121	0122	0123	0124	0125	0071	0072	0073	0074	0075
1325	1374	1423	1472	1521	1023	1065	1107	1149	1191	0131	0132	0133	0134	0135	None	None	None	None	None
1326	1375	1424	1473	1522	1024	1066	1108	1150	1192	0136	0137	0138	0139	0140	0081	0082	0083	0084	0085
1327	1376	1425	1474	1523	1025	1067	1109	1151	1193	0141	0142	0143	0144	0145	None	None	None	None	None
1328	1377	1426	1475	1524	1026	1068	1110	1152	1194	0146	0147	0148	0149	0150	0086	0087	0088	0089	0090
1329	1378	1427	1476	1525	1027	1069	1111	1153	1195	0156	0157	0158	0159	0160	None	None	None	None	None
1330	1379	1428	1477	1526	1028	1070	1112	1154	1196	0161	0162	0163	0164	0165	None	None	None	None	None

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:14Z
Check the source to verify that this is the current version before use.

TABLE II. Substitutability data - "G" seal type - Continued.

Dash no. in MIL-C-39006/3D, /3C, and /3B					Substitutable for dash no. in MIL-C-39006/3A					Substitutable for dash no. in MIL-C-39006/3 1/				
L	M	P	R	S	L	M	P	R	S	L	M	P	R	S
1331	1380	1429	1478	1527	1029	1071	1113	1155	1197	0166	0167	0168	0169	0170
1332	1381	1430	1479	1528	1030	1072	1114	1156	1198	0171	0172	0173	0174	0175
1333	1382	1431	1480	1529	None	None	None	None	None	None	None	None	None	None
1334	1383	1432	1481	1530	None	None	None	None	None	None	None	None	None	None
1335	1384	1433	1482	1531	None	None	None	None	None	None	None	None	None	None
1336	1385	1434	1483	1532	None	None	None	None	None	None	None	None	None	None
1337	1386	1435	1484	1533	1031	1073	1115	1157	1199	0181	0182	0183	0184	0185
1338	1387	1436	1485	1534	1032	1074	1116	1158	1200	0186	0187	0188	0189	0190
1339	1388	1437	1486	1535	1033	1075	1117	1159	1201	0191	0192	0193	0194	0195
1340	1389	1438	1487	1536	1034	1076	1118	1160	1202	0196	0197	0198	0199	0200
1341	1390	1439	1488	1537	1035	1077	1119	1161	1203	0206	0207	0208	0209	0210
1342	1391	1440	1489	1538	1036	1078	1120	1162	1204	0211	0212	0213	0214	0215
1343	1392	1441	1490	1539	1037	1079	1121	1163	1205	0216	0217	0218	0219	0220
1344	1393	1442	1491	1540	1038	1080	1122	1164	1206	0221	0222	0223	0224	0225
1345	1394	1443	1492	1541	1039	1081	1123	1165	1207	0231	0232	0233	0234	0235
1346	1395	1444	1493	1542	1040	1082	1124	1166	1208	0236	0237	0238	0239	0240
1347	1396	1445	1494	1543	1041	1083	1125	1167	1209	0241	0242	0243	0244	0245
1348	1397	1446	1495	1544	1042	1084	1126	1168	1210	0246	0247	0248	0249	0250

Dash no. in MIL-C-39006/3D, /3C, and /3B	Substitutable for: Dash no. in MIL-C-39006/3A	Substitutable for: Type designation in MIL-C-38102/5B (USAF)
1398	1085	5ECAA186LP
1399	1086	5ECAB556LP
1405	1092	5ECBC107LP
1406	1093	5ECCA106LP
1411	1095	5ECDA605LP
1412	1096	5ECDB206LP
1415	1099	5ECEA405LP
1418	1102	5ECEC406LP
1428	1112	5ECGA205LP

1/ Dash numbers 0001 through 0005; 0026 through 0030; 0051 through 0055; 0076 through 0080; 0101 through 0105; 0126 through 0130; 0151 through 0155; 0176 through 0180; 0201 through 0205; and 0226 through 0230 deleted with no replacement.

2/ Dash numbers 0021 through 0030 and 0076 through 0080 deleted with no replacement.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:14Z
Check the source to verify that this is the current version before use.

TABLE III. Substitutability data - "E" seal type.

Dash no. in MIL-C-39006/3D and /3C					Substitutable for dash no. in														
					MIL-C-39006/3B					MIL-C-39006/3A					MIL-C-39006/13				
L	M	P	R	S	L	M	P	R	S	L	M	P	R	S	L	M	P	R	S
1300	1349	1398	1447	1496	2301	2361	2421	2481	2541	2002	2052	2102	2152	2202	0006	0007	0008	0009	0010
1301	1350	1399	1448	1497	2302	2362	2422	2482	2542	2003	2053	2103	2153	2203	0011	0012	0013	0014	0015
1302	1351	1400	1449	1498	2303	2363	2423	2483	2543	2004	2054	2104	2154	2204	0016	0017	0018	0019	0020
1303	1352	1401	1450	1499	2304	2364	2424	2484	2544	2005	2055	2105	2155	2205	0021	0022	0023	0024	0025
1304	1353	1402	1451	1500	2306	2366	2426	2486	2546	2007	2057	2107	2157	2207	0031	0032	0033	0034	0035
1305	1354	1403	1452	1501	2307	2367	2427	2487	2547	2008	2058	2108	2158	2208	0036	0037	0038	0039	0040
1306	1355	1404	1453	1502	2308	2368	2428	2488	2548	2009	2059	2109	2159	2209	0041	0042	0043	0044	0045
1307	1356	1405	1454	1503	2309	2369	2429	2489	2549	2010	2060	2110	2160	2210	0046	0047	0048	0049	0050
1308	1357	1406	1455	1504	2311	2371	2431	2491	2551	None	None	None	None	None	None	None	None	None	None
1309	1358	1407	1456	1505	2312	2372	2432	2492	2552	None	None	None	None	None	None	None	None	None	None
1310	1359	1408	1457	1506	2313	2373	2433	2493	2553	None	None	None	None	None	None	None	None	None	None
1311	1360	1409	1458	1507	2314	2374	2434	2494	2554	None	None	None	None	None	None	None	None	None	None
1312	1361	1410	1459	1508	None	None	None	None	None	None	None	None	None	None	None	None	None	None	None
1313	1362	1411	1460	1509	2316	2376	2436	2496	2556	2012	2062	2112	2162	2212	0056	0057	0058	0059	0060
1314	1363	1412	1461	1510	2317	2377	2437	2497	2557	2013	2063	2113	2163	2213	0061	0062	0063	0064	0065
1315	1364	1413	1462	1511	2318	2378	2438	2498	2558	2014	2064	2114	2064	2214	0066	0067	0068	0069	0070
1316	1365	1414	1463	1512	2319	2379	2439	2499	2559	2015	2065	2115	2165	2215	0071	0072	0073	0074	0075
1317	1366	1415	1464	1513	2321	2381	2441	2501	2561	2017	2067	2117	2167	2217	0081	0082	0083	0084	0085
1318	1367	1416	1465	1514	2322	2382	2442	2502	2562	2018	2068	2118	2168	2218	0086	0087	0088	0089	0090
1319	1368	1417	1466	1515	2323	2383	2443	2503	2563	2019	2069	2119	2169	2219	0091	0092	0093	0094	0095
1320	1369	1418	1467	1516	2324	2384	2444	2504	2564	2020	2070	2120	2170	2220	0096	0097	0098	0099	0100
1321	1370	1419	1468	1517	2326	2386	2446	2506	2566	2022	2072	2122	2172	2222	0106	0107	0108	0109	0110
1322	1371	1420	1469	1518	2327	2387	2447	2507	2567	2023	2073	2123	2173	2223	0111	0112	0113	0114	0115
1323	1372	1421	1470	1519	2328	2388	2448	2508	2568	2024	2074	2124	2174	2224	0116	0117	0118	0119	0120
1324	1373	1422	1471	1520	2329	2389	2449	2509	2569	2025	2075	2125	2175	2225	0121	0122	0123	0124	0125
1325	1374	1423	1472	1521	2331	2391	2451	2511	2571	2027	2077	2127	2177	2227	0131	0132	0133	0134	0135
1326	1375	1424	1473	1522	2332	2392	2452	2512	2572	2028	2078	2128	2178	2228	0136	0137	0138	0139	0140
1327	1376	1425	1474	1523	2333	2393	2453	2513	2573	2029	2079	2129	2179	2229	0141	0142	0143	0144	0145
1328	1377	1426	1475	1524	2334	2394	2454	2514	2574	2030	2080	2130	2180	2230	0146	0147	0148	0149	0150
1329	1378	1427	1476	1525	2336	2396	2456	2516	2576	2032	2082	2132	2182	2232	0156	0157	0158	0159	0160
1330	1379	1428	1477	1526	2337	2397	2457	2517	2577	2033	2083	2133	2183	2233	0161	0162	0163	0164	0165

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:14Z
Check the source to verify that this is the current version before use.

TABLE III. Substitutability data - "E" seal type - Continued.

Dash no. in MIL-C-39006/3D and /3C					Substitutable for dash no. in														
					MIL-C-39006/3B					MIL-C-39006/3A					MIL-C-39006/13				
L	M	P	R	S	L	M	P	R	S	L	M	P	R	S	L	M	P	R	S
1331	1380	1429	1478	1527	2338	2398	2458	2518	2578	2034	2084	2134	2184	2234	0166	0167	0168	0169	0170
1332	1381	1430	1479	1528	2339	2399	2459	2519	2579	2035	2085	2135	2185	2235	0171	0172	0173	0174	0175
1333	1382	1431	1480	1529	2341	2401	2461	2521	2581	None	None	None	None	None	None	None	None	None	None
1334	1383	1432	1481	1530	2342	2402	2462	2522	2582	None	None	None	None	None	None	None	None	None	None
1335	1384	1433	1482	1531	2343	2403	2463	2523	2583	None	None	None	None	None	None	None	None	None	None
1336	1385	1434	1483	1532	2344	2404	2464	2524	2584	None	None	None	None	None	None	None	None	None	None
1337	1386	1435	1484	1533	2346	2406	2466	2526	2586	2037	2087	2137	2187	2237	0181	0182	0183	0184	0185
1338	1387	1436	1485	1534	2347	2407	2467	2527	2587	2038	2088	2138	2188	2238	0186	0187	0188	0189	0190
1339	1388	1437	1486	1535	2348	2408	2468	2528	2588	2039	2089	2139	2189	2239	0191	0192	0193	0194	0195
1340	1389	1438	1487	1536	2349	2409	2469	2529	2589	2040	2090	2140	2190	2240	0196	0197	0198	0199	0200
1341	1390	1439	1488	1537	2351	2411	2471	2531	2591	2042	2092	2142	2192	2242	0206	0207	0208	0209	0210
1342	1391	1440	1489	1538	2352	2412	2472	2532	2592	2043	2093	2143	2193	2243	0211	0212	0213	0214	0215
1343	1392	1441	1490	1539	2353	2413	2473	2533	2593	2044	2094	2144	2194	2244	0216	0217	0218	0219	0220
1344	1393	1442	1491	1540	2354	2414	2474	2534	2594	2045	2095	2145	2195	2245	0221	0222	0223	0224	0225
1345	1394	1443	1492	1541	2356	2416	2476	2536	2596	2047	2097	2147	2197	2247	0231	0232	0233	0234	0235
1346	1395	1444	1493	1542	2357	2417	2477	2537	2597	2048	2098	2148	2198	2248	0236	0237	0238	0239	0240
1347	1396	1445	1494	1543	2358	2418	2478	2538	2598	2049	2099	2149	2199	2249	0241	0242	0243	0244	0245
1348	1397	1446	1495	1544	2359	2419	2479	2539	2599	2050	2100	2150	2200	2250	0246	0247	0248	0249	0250

Dash no. in MIL-C-39006/3D,/3C and 3B					Substitutable for dash no. in									
					MIL-C-39006/3A					MIL-C-39006/13				
L	M	P	R	S	L	M	P	R	S	L	M	P	R	S
2300	2360	2420	2480	2540	2001	2051	2101	2151	2201	0001	0002	0003	0004	0005
2305	2365	2425	2485	2545	2006	2056	2106	2156	2206	0026	0027	0028	0029	0030
2310	2370	2430	2490	2550	None	None	None	None	None	None	None	None	None	None
2315	2375	2435	2495	2555	2011	2061	2111	2161	2211	0051	0052	0053	0054	0055
2320	2380	2440	2500	2560	2016	2066	2116	2166	2216	0076	0077	0078	0079	0080
2325	2385	2445	2505	2565	2021	2071	2121	2171	2221	0101	0102	0103	0104	0105
2330	2390	2450	2510	2570	2026	2076	2126	2176	2226	0126	0127	0128	0129	0130
2335	2395	2455	2515	2575	2031	2081	2131	2181	2231	0151	0152	0153	0154	0155
2340	2400	2460	2520	2580	None	None	None	None	None	None	None	None	None	None
2345	2405	2465	2525	2585	2036	2086	2136	2186	2236	0176	0177	0178	0179	0180
2350	2410	2470	2530	2590	2041	2091	2141	2191	2241	0201	0202	0203	0204	0205
2355	2415	2475	2535	2595	2046	2096	2146	2196	2246	0226	0227	0228	0229	0230

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:14Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - ER
Navy - EC
Air Force - 85
NASA - NA

Review activities:
Army - AR
Navy - SH
Air Force - 17, 99
DLA - ES

User activities:
Navy - AS, MC, OS
Air Force - 19

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5910-1713)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:14Z
Check the source to verify that this is the current version before use.