

MILITARY SPECIFICATION SHEET

CAPACITORS, FIXED, ELECTROLYTIC (NONSOLID ELECTROLYTE), TANTALUM, (NONPOLARIZED, PLAIN FOIL), 85°C (VOLTAGE DERATED TO 125°C), ESTABLISHED RELIABILITY, STYLE CLR37

The complete requirements for procuring the capacitors described herein shall consist of this document and the latest issue of Specification MIL-C-39006.

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

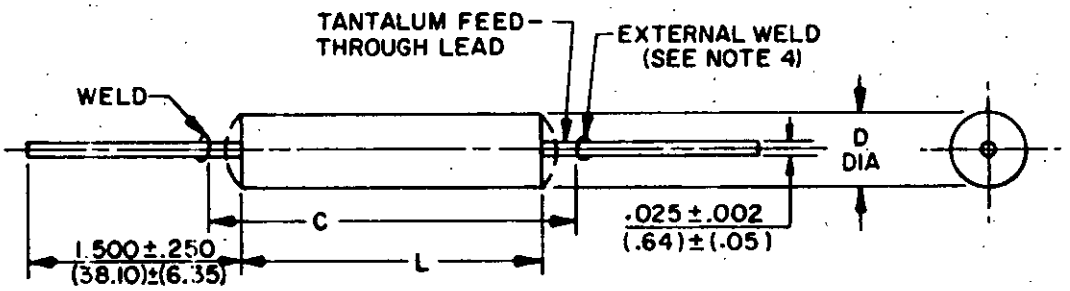



© Case size	Dimensions			
	Basic case		Insulated case	
	L 1/ ±.062(1.57)	D ±.016(.41)	D max	C max
E1	.688(17.48)	.188(4.78)	.219 (5.56)	1.188(30.18)
G2	.969(24.61)	.281(7.14)	.312 (7.92)	1.469(37.31)
G3	1.438(36.53)	.375(9.53)	.406(10.31)	1.938(49.23)
G4	2.125(53.98)	.375(9.53)	.406(10.31)	2.625(66.68)
G5	2.750(69.85)	.375(9.53)	.406(10.31)	3.250(82.55)

1/ Length of basic case; sleeving shall be as specified in MIL-C-39006.

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are in parentheses.
3. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
4. The weld shall not be enclosed in the end seal.

FIGURE 1. Style CLR37 capacitors.

© denotes changes.

FSC 5910

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:15Z
Check the source to verify that this is the current version before use.

TABLE I. Capacitor characteristics.

Rated voltage (85° C)	Cap.	Cap. tolerance	DC leakage (max) 25° C	DC leakage (max) 85° C & 125° C	Derated voltage (125° C)	Surge voltage (85° C)	Impedance (max)	Case size	Part No. M39006/04- Failure rate level (%/1,000 hr) L(2.0)	M(1.0)	P(0.1)	R(0.01)	S(0.001)
HERMETICALLY-SEALED													
volts, dc	μF	%	μA	μA	volts, dc	volts, dc	ohms						
15	10.0	±20	2	4	10	17.2	223	G2	1200	1245	1290	1335	1380
15	35.0	±20	2	10	10	17.2	64	G3	1201	1246	1291	1336	1381
15	70.0	±20	4	20	10	17.2	32	G4	1202	1247	1292	1337	1382
15	100.0	±20	5	30	10	17.2	23	G5	1203	1248	1293	1338	1383
25	6.0	±20	2	6	15	28.8	372	G2	1204	1249	1294	1339	1384
25	20.0	±20	2	10	15	28.8	112	G3	1205	1250	1295	1340	1385
25	40.0	±20	4	20	15	28.8	56	G4	1206	1251	1296	1341	1386
25	60.0	±20	5	30	15	28.8	37	G5	1207	1252	1297	1342	1387
30	5.5	±20	2	6	20	34.5	406	G2	1208	1253	1298	1343	1388
30	18.0	±20	2	12	20	34.5	124	G3	1209	1254	1299	1344	1389
30	36.0	±20	4	26	20	34.5	62	G4	1210	1255	1300	1345	1390
30	45.0	±20	6	36	20	34.5	50	G5	1211	1256	1301	1346	1391
50	3.0	±20	2	6	30	57.5	743	G2	1212	1257	1302	1347	1392
50	10.0	±20	2	12	30	57.5	223	G3	1213	1258	1303	1348	1393
50	20.0	±20	4	24	30	57.5	112	G4	1214	1259	1304	1349	1394
50	30.0	±20	6	36	30	57.5	75	G5	1215	1260	1305	1350	1395
75	2.0	±20	2	6	50	86.2	1115	G2	1216	1261	1306	1351	1396
75	7.0	±20	2	13	50	86.2	319	G3	1217	1262	1307	1352	1397
75	14.0	±20	4	24	50	86.2	159	G4	1218	1263	1308	1353	1398
75	20.0	±20	6	36	50	86.2	112	G5	1219	1264	1309	1354	1399
100	1.5	±20	2	6	65	115.0	1487	G2	1220	1265	1310	1355	1400
100	5.0	±20	2	13	65	115.0	446	G3	1221	1266	1311	1356	1401
100	10.0	±20	4	24	65	115.0	223	G4	1222	1267	1312	1357	1402
100	15.0	±20	6	36	65	115.0	149	G5	1223	1268	1313	1358	1403
150	1.0	±20	2	6	100	172.0	2227	G2	1224	1269	1314	1359	1404
150	1.2	±20	3	12	100	172.0	2000	G2	1225	1270	1315	1360	1405
150	3.5	±20	3	13	100	172.0	638	G3	1226	1271	1316	1361	1406
150	7.0	±20	4	24	100	172.0	319	G4	1227	1272	1317	1362	1407
150	10.0	±20	6	36	100	172.0	223	G5	1228	1273	1318	1363	1408
200	0.75	±15	8	32	150	230.0	2700	G2	1229	1274	1319	1364	1409
200	2.5	±15	16	64	150	230.0	800	G3	1230	1275	1320	1365	1410
200	5.0	±15	28	112	150	230.0	400	G4	1231	1276	1321	1366	1411
200	7.5	±15	40	160	150	230.0	260	G5	1232	1277	1322	1367	1412

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:15Z
Check the source to verify that this is the current version before use.

TABLE I. Capacitor characteristics. - Continued

Rated voltage (85° C)	Cap.	Cap. tolerance	DC leakage (max) 25° C	DC leakage (max) 85° C & 125° C	Derated voltage (125° C)	Surge voltage (85° C)	Impedance (max)	Case size	Part No. M39006/04- Failure rate level (%/1,000 hr) L(2.0)	M(1.0)	P(0.1)	R(0.01)	S(0.001)
HERMETICALLY-SEALED													
volts, dc	µF	%	µA	µA	volts, dc	volts, dc	ohms						
250	0.6	±15	8	40	165	287.0	3300	G2	1233	1278	1323	1368	1413
250	2.0	±15	16	80	165	287.0	1000	G3	1234	1279	1324	1369	1414
250	4.0	±15	28	140	165	287.0	500	G4	1235	1280	1325	1370	1415
250	6.0	±15	40	200	165	287.0	330	G5	1236	1281	1326	1371	1416
300	0.47	±15	10	50	200	345.0	4500	G2	1237	1282	1327	1372	1417
300	1.5	±15	20	100	200	345.0	1500	G3	1238	1283	1328	1373	1418
300	3.3	±15	35	175	200	345.0	643	G4	1239	1284	1329	1374	1419
300	4.7	±15	50	250	200	345.0	450	G5	1240	1285	1330	1375	1420
375	0.39	±15	10	100	250	431.0	5620	G2	1241	1286	1331	1376	1421
375	1.2	±15	20	225	250	431.0	1880	G3	1242	1287	1332	1377	1422
375	2.2	±15	35	250	250	431.0	900	G4	1243	1288	1333	1378	1423
375	3.9	±15	50	325	250	431.0	562	G5	1244	1289	1334	1379	1424
NONHERMETICALLY-SEALED													
15	2.5	±20	1	2	10	17.2	893	E1	2300	2355	2410	2465	2520
25	1.5	±20	1	3	15	28.8	1487	E1	2305	2360	2415	2470	2525
30	1.4	±20	2	5	20	34.5	1594	E1	2310	2365	2420	2475	2530
50	0.8	±20	1	4	30	57.5	2790	E1	2315	2370	2425	2480	2535
75	0.5	±20	1	4	50	86.2	4460	E1	2320	2375	2430	2485	2540
100	0.4	±20	1	3.5	65	115.0	5580	E1	2325	2380	2435	2490	2545
150	0.25	±20	1	4	100	172.0	8909	E1	2330	2385	2440	2495	2550
200	0.15	±15	4	25	150	230.0	14000	E1	2335	2390	2445	2500	2555
250	0.15	±15	6	32	165	287.0	13000	E1	2340	2395	2450	2505	2560
300	0.12	±15	4	25	200	345.0	17500	E1	2345	2400	2455	2510	2565
375	0.1	±15	8	80	250	431.0	23500	E1	2350	2405	2460	2515	2570

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:15Z
Check the source to verify that this is the current version before use.

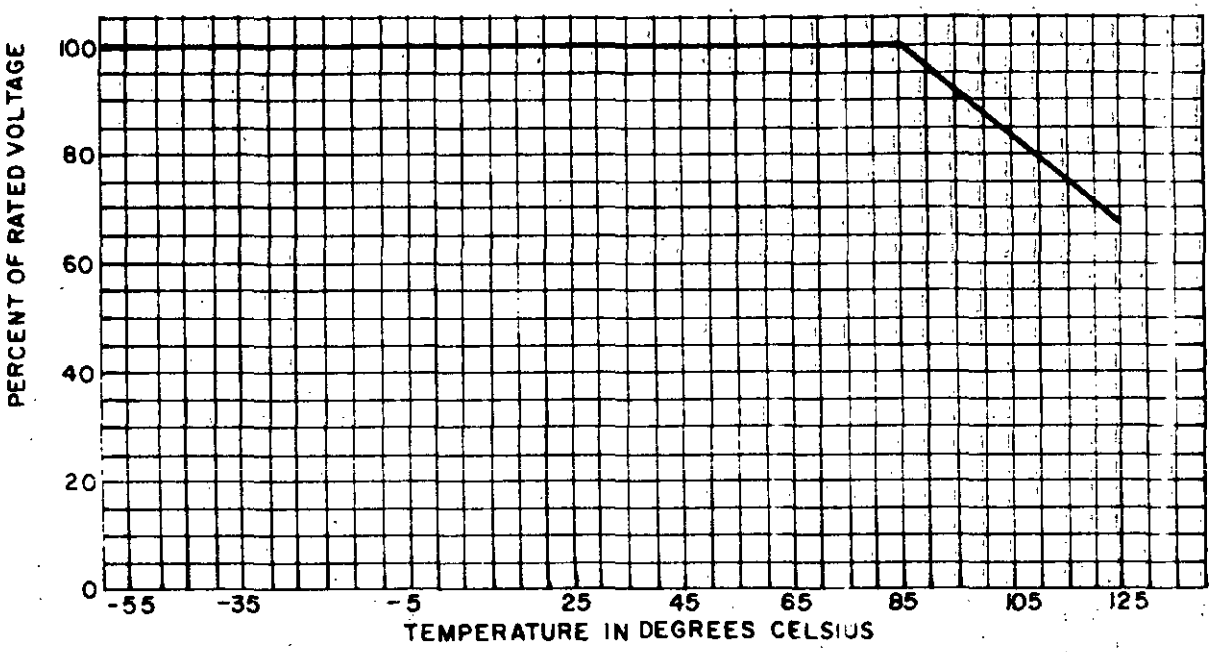


FIGURE 2. Voltage derating with temperature.

REQUIREMENTS:

Design and construction:
Dimensions and configuration - See figure 1.
Case type - Tubular, insulated.
Seal type - G (hermetic) or E (nonhermetic) as shown in table I.
Terminals - Axial-wire lead.
Rated temperature - -55° to +85°C, voltage derated to +125°C (see figure 2).
Rated voltage - See table I.
Capacitance (Cap.) (nom) - See table I.
Cap. tolerance - See table I.
FR level - See table I.

Constant voltage conditioning: As specified in MIL-C-39006.

DC leakage (DCL) (max) (at 25°C): See table I.

Cap. (nom): Method 305 of MIL-STD-202. See table I.

Dissipation factor (DF) (max): 10 percent.

Seal (G seal type only): Method 112 of MIL-STD-202, conditions A and C.

Shock (specified pulse): Method 213 of MIL-STD-202, condition I (100G).

Vibration, high frequency: Method 204 of MIL-STD-202, condition D (20G).

Temperature cycling: Method 102 of MIL-STD-202, condition D (with step 3 at 125°C). Number of cycles - 30.
DCL - 125% (max) of 25°C value of table I.
ΔCap. - Within ±5% of initial measurement.
DF - 115% (max) of initial requirement.

Salt spray (corrosion): Method 101 of MIL-STD-202, condition B (48 hr).

Solderability: Method 208 of MIL-STD-202.

Terminal strength:
Pull - Method 211 of MIL-STD-202, condition A.
Wire-lead bend - In accordance with MIL-C-39006.

Surge voltage: See table I.

Moisture resistance: Method 106 of MIL-STD-202.
DCL - 125% (max) of 25°C value of table I.
ΔCap. - Within ±3% of initial measurement.
DF - 115% (max) of initial requirement.

Dielectric withstanding voltage (DWV): Method 301 of MIL-STD-202. 2,000 vdc, min.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:15Z
Check the source to verify that this is the current version before use.

Insulation resistance (IR): Method 302 of MIL-STD-202, condition B. 100 megohms, min.

Low temperature (storage): Method 502 of MIL-STD-810.
- DCL - See table I.
- ΔCap. - Within ±3% of initial measurement.
- DF - 10% (max).

Stability at low and high temperatures:
- Step 1 (+25°C):
  - DCL - See table I.
  - Cap. - Within tolerance of table I value.
  - DF - 10% (max).
- Step 2 (-55°C):
  - Imp. - See table I.
  - ΔCap. - -25% (≤250v) or -40% (> 250v) of step 1 value (max).
- Step 3 (+25°C):
  - DCL - See table I.
  - ΔCap. - Within ±3% of step 1 value.
  - DF - 10% (max).
- Step 4 (+85°C):
  - DCL - See table I.
  - ΔCap. - +20% (≤ 50v) or +15% (>50v) of step 1 value (max).
  - DF - 20% (≤50v) or 15% (> 50v) (max).
- 1/ Step 5 (+125°C):
  - DCL - See table I.
  - ΔCap. - +25% (≤30v) or +15% (>30v) of step 1 value (max).
  - DF - 25% (≤30v) or 15% (> 30v) (max).
- Step 6 (+25°C):
  - DCL - See table I.
  - ΔCap. - Within ±3% of step 1 value.
  - DF - 10% (max).

Reverse voltage: Not applicable.

Life at 85°C: Method 108 of MIL-STD-202.
- 2,000-hr (qualification):
  - DCL - See table I.
  - ΔCap. - Within ±15% (≤50v) or ±10% (> 50v) of initial measurement.
  - DF - 10% (max).
- 240-hr (group B):
  - DCL - See table I.
  - ΔCap. - Within ±10% of initial measurement.
  - DF - 10% (max).
- 10,000-hr (group C) and extended life:
  - DCL (85°C) - 125% (max) of table I value.
  - DCL (25°C) - See table I.
  - ΔCap. - Within ±25% of initial measurement.
  - DF - 20% (max).
  - DWV - 2,000 vdc, min.
  - IR - 100 megohms, min.

Vacuum life (G seal type only):
- DCL - See table I.
- ΔCap. - Within ±20% of initial measurement.
- DF - 10% (max).
- Weight loss - 4.1 mg, max.

1/ Life at 125°C: Method 108 of MIL-STD-202.
- DCL - See table I.
- ΔCap. - Within ±15% (≤30v) or ±10% (>30v) of initial measurement.
- DF - 10% (max).
- DWV - 2,000 vdc, min.
- IR - 100 megohms, min.

Barometric pressure: Method 105 of MIL-STD-202, condition E (150,000 ft).
Test voltage - Rated voltage.

Fungus: Method 508 of MIL-STD-810.

Resistance to solvents: Method 215 of MIL-STD-202.

Resistance to soldering heat: Method 210 of MIL-STD-202, condition B.
- DCL - See table I.
- ΔCap. - Within ±3% of initial measurement.
- DF - 10% (max).

Marking (except case size E1): In accordance with MIL-C-39006. E1 case size, mark as follows (the trademark may also be placed on the unit where space permits):

Example:
- M39006/ 04-2300 - Part number.
- J12345 - "J" for "JAN" brand and source code.
- 7144A - Date code and lot symbol.
- 2.5μF 15V - Capacitance and rated voltage.

1/ 125°C derated voltage referenced.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:15Z
Check the source to verify that this is the current version before use.

TABLE II. Substitutability data - "G" seal type.

Dash no. in MIL-C-39006/4C and /4B					Substitutable for dash no. in:														
					MIL-C-39006/4A					1/ MIL-C-39006/4					2/ MIL-C-39006/8				
L	M	P	R	S	L	M	P	R	S	L	M	P	R	S	L	M	P	R	S
1200	1245	1290	1335	1380	1001	1038	1075	1112	1149	0006	0007	0008	0009	0010	0001	0002	0003	0004	0005
1201	1246	1291	1336	1381	1002	1039	1076	1113	1150	0011	0012	0013	0014	0015	0006	0007	0008	0009	0010
1202	1247	1292	1337	1382	1003	1040	1077	1114	1151	0016	0017	0018	0019	0020			None		
1203	1248	1293	1338	1383	1004	1041	1078	1115	1152	0021	0022	0023	0024	0025	0011	0012	0013	0014	0015
1204	1249	1294	1339	1384	1005	1042	1079	1116	1153	0031	0032	0033	0034	0035			None		
1205	1250	1295	1340	1385	1006	1043	1080	1117	1154	0036	0037	0038	0039	0040			None		
1206	1251	1296	1341	1386	1007	1044	1081	1118	1155	0041	0042	0043	0044	0045			None		
1207	1252	1297	1342	1387	1008	1045	1082	1119	1156	0046	0047	0048	0049	0050			None		
1208	1253	1298	1343	1388			None					None					None		
1209	1254	1299	1344	1389			None					None					None		
1210	1255	1300	1345	1390			None					None					None		
1211	1256	1301	1346	1391			None					None					None		
1212	1257	1302	1347	1392	1009	1046	1083	1120	1157	0056	0057	0058	0059	0060	0031	0032	0033	0034	0035
1213	1258	1303	1348	1393	1010	1047	1084	1121	1158	0061	0062	0063	0064	0065	0036	0037	0038	0039	0040
1214	1259	1304	1349	1394	1011	1048	1085	1122	1159	0066	0067	0068	0069	0070	0021	0022	0023	0024	0025
1215	1260	1305	1350	1395	1012	1049	1086	1123	1160	0071	0072	0073	0074	0075	0041	0042	0043	0044	0045
1216	1261	1306	1351	1396	1013	1050	1087	1124	1161	0081	0082	0083	0084	0085	0046	0047	0048	0049	0050
1217	1262	1307	1352	1397	1014	1051	1088	1125	1162	0086	0087	0088	0089	0090	0051	0052	0053	0054	0055
1218	1263	1308	1353	1398	1015	1052	1089	1126	1163	0091	0092	0093	0094	0095			None		
1219	1264	1309	1354	1399	1016	1053	1090	1127	1164	0096	0097	0098	0099	0100	0056	0057	0058	0059	0060
1220	1265	1310	1355	1400	1017	1054	1091	1128	1165	0106	0107	0108	0109	0110	0061	0062	0063	0064	0065
1221	1266	1311	1356	1401	1018	1055	1092	1129	1166	0111	0112	0113	0114	0115	0066	0067	0068	0069	0070
1222	1267	1312	1357	1402	1019	1056	1093	1130	1167	0116	0117	0118	0119	0120			None		
1223	1268	1313	1358	1403	1020	1057	1094	1131	1168	0121	0122	0123	0124	0125	0071	0072	0073	0074	0075
1224	1269	1314	1359	1404	1021	1058	1095	1132	1169	0131	0132	0133	0134	0135			None		
1225	1270	1315	1360	1405	1022	1059	1096	1133	1170			None			0076	0077	0078	0079	0080
1226	1271	1316	1361	1406	1023	1060	1097	1134	1171	0136	0137	0138	0139	0140	0081	0082	0083	0084	0085
1227	1272	1317	1362	1407	1024	1061	1098	1135	1172	0141	0142	0143	0144	0145			None		
1228	1273	1318	1363	1408	1025	1062	1099	1136	1173	0146	0147	0148	0149	0150	0086	0087	0088	0089	0090
1229	1274	1319	1364	1409	1026	1063	1100	1137	1174	0156	0157	0158	0159	0160			None		
1230	1275	1320	1365	1410	1027	1064	1101	1138	1175	0161	0162	0163	0164	0165			None		
1231	1276	1321	1366	1411	1028	1065	1102	1139	1176	0166	0167	0168	0169	0170			None		
1232	1277	1322	1367	1412	1029	1066	1103	1140	1177	0171	0172	0173	0174	0175			None		

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:15Z
Check the source to verify that this is the current version before use.

TABLE II. Substitutability data - "G" seal type - Continued.

Dash no. in MIL-C-39006/4C and /4B					Substitutable for dash no. in:															
					MIL-C-39006/4A					1/ MIL-C-39006/4					MIL-C-39006/8					
L	M	P	R	S	L	M	P	R	S	L	M	P	R	S	L	M	P	R	S	
1233	1278	1323	1368	1413	None					None					None					
1234	1279	1324	1369	1414	None					None										
1235	1280	1325	1370	1415	None					None										
1236	1281	1326	1371	1416	None					None										
1237	1282	1327	1372	1417	1030	1067	1104	1141	1178	0181	0182	0183	0184	0185						
1238	1283	1328	1373	1418	1031	1068	1105	1142	1179	0186	0187	0188	0189	0190						
1239	1284	1329	1374	1419	1032	1069	1106	1143	1180	0191	0192	0193	0194	0195						
1240	1285	1330	1375	1420	1033	1070	1107	1144	1181	0196	0197	0198	0199	0200						
1241	1286	1331	1376	1421	1034	1071	1108	1145	1182	0206	0207	0208	0209	0210						
1242	1287	1332	1377	1422	1035	1072	1109	1146	1183	0211	0212	0213	0214	0215						
1243	1288	1333	1378	1423	1036	1073	1110	1147	1184	0216	0217	0218	0219	0220						
1244	1289	1334	1379	1424	1037	1074	1111	1148	1185	0221	0222	0223	0224	0225						

Dash no. in MIL-C-39006/4C and 4B	Substitutable for	
	Dash no. in MIL-C-39006/4A	Type designation in MIL-C-38102/6B(USAF)
1290	1075	6ECAA106LP
1293	1078	6ECAB107LP
1302	1083	6ECDA305LP
1306	1087	6ECEA205LP
1315	1096	6ECGA125LP

1/ Dash nos. 0001 thru 0005; 0026 thru 0030; 0051 thru 0055; 0076 thru 0080; 0101 thru 0105; 0126 thru 0130; 0151 thru 0155; 0176 thru 0180; and 0201 thru 0205 deleted with no replacement.

2/ Dash nos. 0016 thru 0020 and 0026 thru 0030 deleted with no replacement.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:15Z
Check the source to verify that this is the current version before use.

TABLE III. Substitutability data - "E" seal type.

Dash no. in MIL-C-39006/4C and /4B					Substitutable for dash no. in: MIL-C-39006/4B					MIL-C-39006/4A					MIL-C-39006/14				
L	M	P	R	S	L	M	P	R	S	L	M	P	R	S	L	M	P	R	S
1200	1245	1290	1335	1380	2301	2356	2411	2466	2521	2002	2047	2092	2137	2182	0006	0007	0008	0009	0010
1201	1246	1291	1336	1381	2302	2357	2412	2467	2522	2003	2048	2093	2138	2183	0011	0012	0013	0014	0015
1202	1247	1292	1337	1382	2303	2358	2413	2468	2523	2004	2049	2094	2139	2184	0016	0017	0018	0019	0020
1203	1248	1293	1338	1383	2304	2359	2414	2469	2524	2005	2050	2095	2140	2185	0021	0022	0023	0024	0025
1204	1249	1294	1339	1384	2306	2361	2416	2471	2526	2007	2052	2097	2142	2187	0031	0032	0033	0034	0035
1205	1250	1295	1340	1385	2307	2362	2417	2472	2527	2008	2053	2098	2143	2188	0036	0037	0038	0039	0040
1206	1251	1296	1341	1386	2308	2363	2418	2473	2528	2009	2054	2099	2144	2189	0041	0042	0043	0044	0045
1207	1252	1297	1342	1387	2309	2364	2419	2474	2529	2010	2055	2100	2145	2190	0046	0047	0048	0049	0050
1208	1253	1298	1343	1388	2311	2366	2421	2476	2531	None					None				
1209	1254	1299	1344	1389	2312	2367	2422	2477	2532	None					None				
1210	1255	1300	1345	1390	2313	2368	2423	2478	2533	None					None				
1211	1256	1301	1346	1391	2314	2369	2424	2479	2534	None					None				
1212	1257	1302	1347	1392	2316	2371	2426	2481	2536	2012	2057	2102	2147	2192	0056	0057	0058	0059	0060
1213	1258	1303	1348	1393	2317	2372	2427	2482	2537	2013	2058	2103	2148	2193	0061	0062	0063	0064	0065
1214	1259	1304	1349	1394	2318	2373	2428	2483	2538	2014	2059	2104	2149	2194	0066	0067	0068	0069	0070
1215	1260	1305	1350	1395	2319	2374	2429	2484	2539	2015	2060	2105	2150	2195	0071	0072	0073	0074	0075
1216	1261	1306	1351	1396	2321	2376	2431	2486	2541	2017	2062	2107	2152	2197	0081	0082	0083	0084	0085
1217	1262	1307	1352	1397	2322	2377	2432	2487	2542	2018	2063	2108	2153	2198	0086	0087	0088	0089	0090
1218	1263	1308	1353	1398	2323	2378	2433	2488	2543	2019	2064	2109	2154	2199	0091	0092	0093	0094	0095
1219	1264	1309	1354	1399	2324	2379	2434	2489	2544	2020	2065	2110	2155	2200	0096	0097	0098	0099	0100
1220	1265	1310	1355	1400	2326	2381	2436	2491	2546	2022	2067	2112	2157	2202	0106	0107	0108	0109	0110
1221	1266	1311	1356	1401	2327	2382	2437	2492	2547	2023	2068	2113	2158	2203	0111	0112	0113	0114	0115
1222	1267	1312	1357	1402	2328	2383	2438	2493	2548	2024	2069	2114	2159	2204	0116	0117	0118	0119	0120
1223	1268	1313	1358	1403	2329	2384	2439	2494	2549	2025	2070	2115	2160	2205	0121	0122	0123	0124	0125
1224	1269	1314	1359	1404	2331	2386	2441	2496	2551	2027	2072	2117	2162	2207	0131	0132	0133	0134	0135
1225	1270	1315	1360	1405	None					None					None				
1226	1271	1316	1361	1406	2332	2387	2442	2497	2552	2028	2073	2118	2163	2208	0136	0137	0138	0139	0140
1227	1272	1317	1362	1407	2333	2388	2443	2498	2553	2029	2074	2119	2164	2209	0141	0142	0143	0144	0145
1228	1273	1318	1363	1408	2334	2389	2444	2499	2554	2030	2075	2120	2165	2210	0146	0147	0148	0149	0150
1229	1274	1319	1364	1409	2336	2391	2446	2501	2556	2032	2077	2122	2167	2212	0156	0157	0158	0159	0160
1230	1275	1320	1365	1410	2337	2392	2447	2502	2557	2033	2078	2123	2168	2213	0161	0162	0163	0164	0165
1231	1276	1321	1366	1411	2338	2393	2448	2503	2558	2034	2079	2124	2169	2214	0166	0167	0168	0169	0170
1232	1277	1322	1367	1412	2339	2394	2449	2504	2559	2035	2080	2125	2170	2215	0171	0172	0173	0174	0175

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:15Z
Check the source to verify that this is the current version before use.

TABLE III. Substitutability data - "E" seal type - Continued.

Dash no. in MIL-C-39006/4C and /4B					Substitutable for dash no. in: MIL-C-39006/4B					MIL-C-39006/4A					MIL-C-39006/14				
L	M	P	R	S	L	M	P	R	S	L	M	P	R	S	L	M	P	R	S
1233	1278	1323	1368	1413	2341	2396	2451	2506	2561			None					None		
1234	1279	1324	1369	1414	2342	2397	2452	2507	2562			None					None		
1235	1280	1325	1370	1415	2343	2398	2453	2508	2563			None					None		
1236	1281	1326	1371	1416	2344	2399	2454	2509	2564			None					None		
1237	1282	1327	1372	1417	2346	2401	2456	2511	2566	2037	2082	2127	2172	2217	0181	0182	0183	0184	0185
1238	1283	1328	1373	1418	2347	2402	2457	2512	2567	2038	2083	2128	2173	2218	0186	0187	0188	0189	0190
1239	1284	1329	1374	1419	2348	2403	2458	2513	2568	2039	2084	2129	2174	2219	0191	0192	0193	0194	0195
1240	1285	1330	1375	1420	2349	2404	2459	2514	2569	2040	2085	2130	2175	2220	0196	0197	0198	0199	0200
1241	1286	1331	1376	1421	2351	2406	2461	2516	2571	2042	2087	2132	2177	2222	0206	0207	0208	0209	0210
1242	1287	1332	1377	1422	2352	2407	2462	2517	2572	2043	2088	2133	2178	2223	0211	0212	0213	0214	0215
1243	1288	1333	1378	1423	2353	2408	2463	2518	2573	2044	2089	2134	2179	2224	0216	0217	0218	0219	0220
1244	1289	1334	1379	1424	2354	2409	2464	2519	2574	2045	2090	2135	2180	2225	0221	0222	0223	0224	0225

Dash no. in MIL-C-39006/4C and /4B					Substitutable for dash no. in: MIL-C-39006/4A					MIL-C-39006/14				
L	M	P	R	S	L	M	P	R	S	L	M	P	R	S
2300	2355	2410	2465	2520	2001	2046	2091	2136	2181	0001	0002	0003	0004	0005
2305	2360	2415	2470	2525	2006	2051	2096	2141	2186	0026	0027	0028	0029	0030
2310	2365	2420	2475	2530			None					None		
2315	2370	2425	2480	2535	2011	2056	2101	2146	2191	0051	0052	0053	0054	0055
2320	2375	2430	2485	2540	2016	2061	2106	2151	2196	0076	0077	0078	0079	0080
2325	2380	2435	2490	2545	2021	2066	2111	2156	2201	0101	0102	0103	0104	0105
2330	2385	2440	2495	2550	2026	2071	2116	2161	2206	0126	0127	0128	0129	0130
2335	2390	2445	2500	2555	2031	2076	2121	2166	2211	0151	0152	0153	0154	0155
2340	2395	2450	2505	2560			None					None		
2345	2400	2455	2510	2565	2036	2081	2126	2171	2216	0176	0177	0178	0179	0180
2350	2405	2460	2515	2570	2041	2086	2131	2176	2221	0201	0202	0203	0204	0205

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:15Z
Check the source to verify that this is the current version before use.

Voltage groups (85°C rated voltage):

I - - - - - - - - - -	15 to 50v incl
II - - - - - - - - - -	75 to 200v incl
III - - - - - - - - - -	250 and 375v

NOTE: The capacitors covered by this specification sheet are considered substitutable with the capacitors listed in table II or III.

Custodians:
Army - EL
Navy - EC
Air Force - 11

Review activities:
Army - MU
Navy - SH
Air Force - 17, 80
DSA - ES

User activities:
Army -
Navy - AS, MC, OS
Air Force - 19

Preparing activity:
Navy - EC

Agent:
DSA - ES

(Project 5910-1055-4)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:15Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Avionics Research and Development Activity
ATTN: DAVAA-S/PE
Fort Monmouth, NJ 07703

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:15Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*:

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

Source: https://assist.dla.mil — Downloaded: 2026-10-21T16:16Z
Check the source to verify that this is the current version before use.