INCH-POUND


MIL-PRF-39006/20A
6 August 2001
SUPERSEDING
MIL-C-39006/20
28 August 1970


MILITARY SPECIFICATION SHEET
CAPACITORS, FIXED, ELECTROLYTIC (NONSOLID ELECTROLYTE), TANTALUM,
(POLARIZED, SINTERED SLUG), 85°C (VOLTAGE DERATED TO 125°C),
ESTABLISHED RELIABILITY,
STYLE CLR17

This specification is approved for use by all Departments and Agencies of the Department of Defense.


The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-PRF-39006.

INACTIVE FOR NEW DESIGN AS OF
23 JUNE 1981.
FOR NEW DESIGN USE MIL-PRF-39006/22.

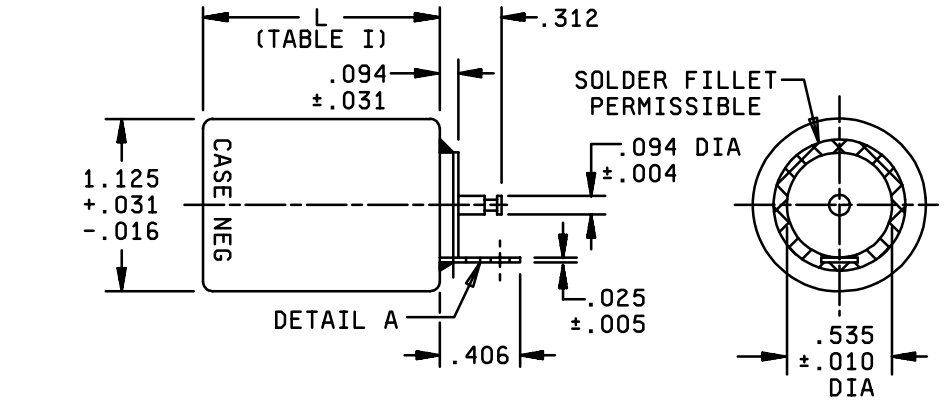

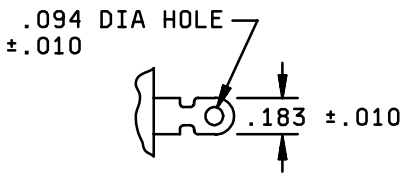

DETAIL A
SOLDER LUG TERMINAL



CIRCUIT DIAGRAM

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.062 (1.57 mm).

Inches	mm	Inches	mm
.004	0.10	.094	2.39
.005	0.13	.183	4.65
.010	0.25	.312	7.92
.016	0.41	.406	10.31
.025	0.64	.535	13.59
.031	0.79	1.125	28.58

FIGURE 1. Style CLR17 capacitors.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:17Z
Check the source to verify that this is the current version before use.

TABLE L. Capacitor characteristics.

Rated voltage (85°C)	Cap.	Cap. tolerance	DC leakage (max)			Dissipation factor (max)	Derated voltage (125°C)	Surge voltage (85°C)	Impedance (max)	Cap. change (-55°C)	Dimension L ±.062 (1.57)	Part No. M39006/20-				
												Failure rate level (% 1,000 hr)				
			25°C	85°C	125°C							L(2.0)	M(1.0)	P(0.1)	R(0.01)	S(0.001)
volts, dc	µF	%	µA	µA	µA	%	volts, dc	volts, dc	ohms	%	Inches					
30	370	±20	18	125	180	39	26	34.5	15	-65	.600 (15.24)	1000	1050	1100	1150	1200
30	370	+50, -15	18	125	180	39	26	34.5	15	-65	.600 (15.24)	1001	1051	1101	1151	1201
30	650	±20	21	145	210	60	26	34.5	15	-85	1.100 (27.94)	1002	1052	1102	1152	1202
30	650	+50, -15	21	145	210	60	26	34.5	15	-85	1.100 (27.94)	1003	1053	1103	1153	1203
30	1300	±20	27	190	270	83	26	34.5	10	-85	1.100 (27.94)	1004	1054	1104	1154	1204
30	1300	+50, -15	27	190	270	83	26	34.5	10	-85	1.100 (27.94)	1005	1055	1105	1155	1205
60	200	±20	19	135	190	22	52	69.0	30	-50	.600 (15.24)	1006	1056	1106	1156	1206
60	200	+50, -15	19	135	190	22	52	69.0	30	-50	.600 (15.24)	1007	1057	1107	1157	1207
60	350	±20	22	155	220	37	52	69.0	25	-70	1.100 (27.94)	1008	1058	1108	1158	1208
60	350	+50, -15	22	155	220	37	52	69.0	25	-70	1.100 (27.94)	1009	1059	1109	1159	1209
60	700	±20	29	200	290	62	52	69.0	15	-70	1.100 (27.94)	1010	1060	1110	1160	1210
60	700	+50, -15	29	200	290	62	52	69.0	15	-70	1.100 (27.94)	1011	1061	1111	1161	1211
90	120	±20	19	135	190	13	78	103.0	40	-40	.600 (15.24)	1012	1062	1112	1162	1212
90	120	+50, -15	19	135	190	13	78	103.0	40	-40	.600 (15.24)	1013	1063	1113	1163	1213
90	220	±20	21	145	210	24	78	103.0	30	-60	1.100 (27.94)	1014	1064	1114	1164	1214
90	220	+50, -15	21	145	210	24	78	103.0	30	-60	1.100 (27.94)	1015	1065	1115	1165	1215
90	450	±20	29	195	290	45	78	103.0	35	-60	1.100 (27.94)	1016	1066	1116	1166	1216
90	450	+50, -15	29	195	290	45	78	103.0	35	-60	1.100 (27.94)	1017	1067	1117	1167	1217
180	42	±20	17	120	170	16	155	207.0	75	-40	.976 (24.79)	1018	1068	1118	1168	1218
180	42	+50, -15	17	120	170	16	155	207.0	75	-40	.976 (24.79)	1019	1069	1119	1169	1219
180	60	±20	19	135	190	13	155	207.0	60	-40	.976 (24.79)	1020	1070	1120	1170	1220
180	60	+50, -15	19	135	190	13	155	207.0	60	-40	.976 (24.79)	1021	1071	1121	1171	1221
180	110	±20	21	145	210	24	155	207.0	60	-60	1.938 (49.23)	1022	1072	1122	1172	1222
180	110	+50, -15	21	145	210	24	155	207.0	60	-60	1.938 (49.23)	1023	1073	1123	1173	1223
180	230	±20	29	200	290	46	155	207.0	50	-60	1.938 (49.23)	1024	1074	1124	1174	1224
180	230	+50, -15	29	200	290	46	155	207.0	50	-60	1.938 (49.23)	1025	1075	1125	1175	1225

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T16:17Z
Check the source to verify that this is the current version before use.

TABLE L. Capacitor characteristics.

Rated voltage (85°C)	Cap.	Cap. tolerance	DC leakage (max)			Dissipation factor (max)	De-rated voltage (125°C)	Surge voltage (85°C)	Impedance (max)	Cap. change (-55°C)	Dimension L ±.062 (1.57)	Part No. M39006/20-				
												Failure rate level (% 1,000 hr)				
			25°C	85°C	125°C							L(2.0)	M(1.0)	P(0.1)	R(0.01)	S(0.001)
volts, dc	µF	%	µA	µA	µA	%	volts, dc	volts, dc	ohms	%	Inches					
270	28	±20	19	120	190	16	235	310.0	80	-40	1.350 (34.29)	1026	1076	1126	1176	1226
270	28	+50, -15	19	120	190	16	235	310.0	80	-40	1.350 (34.29)	1027	1077	1127	1177	1227
270	40	±20	19	135	190	22	235	310.0	100	-40	1.350 (34.29)	1028	1078	1128	1178	1228
270	40	+50, -15	19	135	190	22	235	310.0	100	-40	1.350 (34.29)	1029	1079	1129	1179	1229
270	75	±20	21	145	210	24	235	310.0	90	-60	2.812 (71.42)	1030	1080	1130	1180	1230
270	75	+50, -15	21	145	210	24	235	310.0	90	-60	2.812 (71.42)	1031	1081	1131	1181	1231
270	150	±20	28	195	280	45	235	310.0	75	-60	2.812 (71.42)	1032	1082	1132	1182	1232
270	150	+50, -15	28	195	280	45	235	310.0	75	-60	2.812 (71.42)	1033	1083	1133	1183	1233
360	22	±20	18	125	180	16	310	414.0	100	-40	1.705 (43.31)	1034	1084	1134	1184	1234
360	22	+50, -15	18	125	180	16	310	414.0	100	-40	1.705 (43.31)	1035	1085	1135	1185	1235
360	30	±20	19	135	190	22	310	414.0	120	-40	1.705 (43.31)	1036	1086	1136	1186	1236
360	30	+50, -15	19	135	190	22	310	414.0	120	-40	1.705 (43.31)	1037	1087	1137	1187	1237
450	17	±20	18	125	180	16	390	518.0	130	-40	2.080 (52.83)	1038	1088	1138	1188	1238
450	17	+50, -15	18	125	180	16	390	518.0	130	-40	2.080 (52.83)	1039	1089	1139	1189	1239
450	25	±20	19	135	190	23	390	518.0	150	-40	2.080 (52.83)	1040	1090	1140	1190	1240
450	25	+50, -15	19	135	190	23	390	518.0	150	-40	2.080 (52.83)	1041	1091	1141	1191	1241
540	14	±20	17	120	170	16	470	621.0	160	-40	2.435 (61.85)	1042	1092	1142	1192	1242
540	14	+50, -15	17	120	170	16	470	621.0	160	-40	2.435 (61.85)	1043	1093	1143	1193	1243
540	20	±20	19	135	190	22	470	621.0	170	-40	2.435 (61.85)	1044	1094	1144	1194	1244
540	20	+50, -15	19	135	190	22	470	621.0	170	-40	2.435 (61.85)	1045	1095	1145	1195	1245
630	12	±20	17	120	170	16	545	724.0	180	-40	2.810 (71.37)	1046	1096	1146	1196	1246
630	12	+50, -15	17	120	170	16	545	724.0	180	-40	2.810 (71.37)	1047	1097	1147	1197	1247
630	18	±20	19	135	190	23	545	724.0	200	-40	2.810 (71.37)	1048	1098	1148	1198	1248
630	18	+50, -15	19	135	190	23	545	724.0	200	-40	2.810 (71.37)	1049	1099	1149	1199	1249

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T16:17Z
Check the source to verify that this is the current version before use.

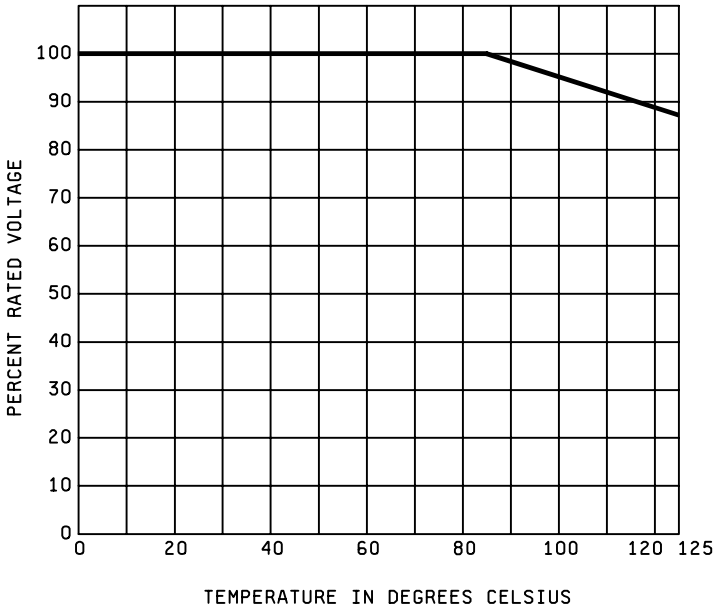


FIGURE 2. Voltage derating with temperature.

REQUIREMENTS:

Design and construction:
- Dimensions and configuration: See figure 1.
- Case type (not impervious to electrolyte): Tubular, uninsulated.
- Seal type: G (hermetic).
- Terminals: Solder-lug.
- Rated temperature: -55° to +85°C, voltage derated to +125°C (see figure 2).
- Rated voltage: See table I.
- Capacitance (Cap.) (nom): See table I.
- Cap. tolerance: See table I.
- FR level: See table I.

Constant voltage conditioning: As specified in MIL-C-39006.

DC leakage (DCL) (max) (at 25°C): See table I.

Cap. (nom): Method 305 of MIL-STD-202. See table I.

Dissipation factor (DF) (max): See table I.

Seal: Method 112 of MIL-STD-202, conditions A and C.

Shock (specified pulse): Method 213 of MIL-STD-202, condition I (100G).

Vibration, high frequency: Method 204 of MIL-STD-202, condition D (20G).

Thermal shock: Method 107 of MIL-STD-202, condition A (with step 3 at +125°C). Number of cycles - 30.
- DCL: 125 percent (max) of 25°C value of table I.
- ΔCap.: Within ±5 percent of initial measurement.
- DF: 115 percent (max) of initial requirement.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:17Z
Check the source to verify that this is the current version before use.

Salt spray (corrosion): Method 101 of MIL-STD-202, condition B (48 hr).

Solderability: Not applicable.

Terminal strength:
Pull: Method 211 of MIL-STD-202, condition A.
Bend (if required): Method 211 of MIL-STD-202, condition B.

Surge voltage: See table I.

Moisture resistance: Method 106 of MIL-STD-202.
DCL: 125 percent (max) of 25°C value of table I.
ΔCap.: Within ±8 percent of initial measurement.
DF: 115 percent (max) of initial requirement.

Dielectric withstanding voltage (DWV): Not applicable.

Insulation resistance (IR): Not applicable.

Low temperature (storage): Method 502 of MIL-STD-810.
DCL: See table I.
ΔCap.: Within ±5 percent of initial measurement.
DF: See table I.

Stability at low and high temperatures:
Step 1 (+25°C):
DCL: See table I.
Cap.: Within tolerance of table I value.
DF: See table I.
Step 2 (-55°C):
Imp.: See table I.
ΔCap.: Within percent shown in table I of step 1 value.
Step 3 (+25°C):
DCL: See table I.
ΔCap.: Within ±5 percent of step 1 value.
DF: See table I.
Step 4 (+85°C):
DCL: See table I.
ΔCap. - +20 percent of step 1 value (max).
DF: See table I.
Step 5 (+125°C):
DCL: See table I.
ΔCap.: +25 percent of step 1 value (max).
DF: See table I.
Step 6 (+25°C):
DCL: See table I.
ΔCap.: Within ±5 percent of step 1 value.
DF: See table I.

Reverse voltage: Not applicable.

Life at 85°C: Method 108 of MIL-STD-202.
2,000-hr (qualification):
DCL: See table I.
ΔCap.: Within ±20 percent of initial measurement.
DF: See table I.
.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:17Z
Check the source to verify that this is the current version before use.

10,000-hour (group B) and extended life:
DCL (85°C): 125 percent (max) of table I value.
DCL (25°C): See table I.
ΔCap.: Within ±25 percent of initial measurement.
DF: 200% (max) of table I value.
DWV and IR: Not applicable.

Vacuum life: Not applicable.

Life at 125°C: Method 108 of MIL-STD-202.
DCL: See table I.
ΔCap.: Within ±20 percent of initial measurement.
DF: 150 percent (max) of table I value.
DWV and IR: Not applicable.

10,000-hr (group B):
DCL (125°C): 125 percent (max) of table I value.
DCL (25°C): See table I.
ΔCap.: Within ±25 percent of initial measurement.
DF: 200 percent (max) of table I value.
DWV and IR: Not applicable.

Barometric pressure: Method 105 of MIL-STD-202, condition E (150,000 feet).
Test voltage: Rated voltage for 30 to 450 V units; 500 V dc for 540 and 630 V units.

Fungus: Method 508 of MIL-STD-810.

Resistance to solvents: Method 215 of MIL-STD-202.

Resistance to soldering heat: Method 210 of MIL-STD-202, condition B.
DCL: See table I.
ΔCap.: Within ±5 percent of initial measurement.
DF: See table I.

Marking: In accordance with MIL-C-39006.
Polarity: Capacitors shall be marked “CASE NEG” on the negative end (see figure 1).

Voltage groups (85°C rated voltage):
I ..... 30 to 90 V inclusive.
II ..... 180 to 360V inclusive.
III ..... 450 to 630 V inclusive.

Custodians:
Army - CR
Navy - EC
Air Force - 11

Preparing activity:
DLA - CC

(Project 5910-2137)

Review activities:
Army - AR, MI
Navy - AS, MC, OS, SH
Air Force - 19, 99

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:17Z
Check the source to verify that this is the current version before use.