

MILITARY SPECIFICATION SHEET

CAPACITORS, FIXED, ELECTROLYTIC (NONSOLID ELECTROLYTE), TANTALUM (POLARIZED, SINTERED SLUG) (EXTENDED RANGE), 85°C (VOLTAGE DERATED TO 125°C), ESTABLISHED RELIABILITY, STYLE CLR81

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the capacitors described herein shall consist of this specification and the latest issue of MIL-C-39006.

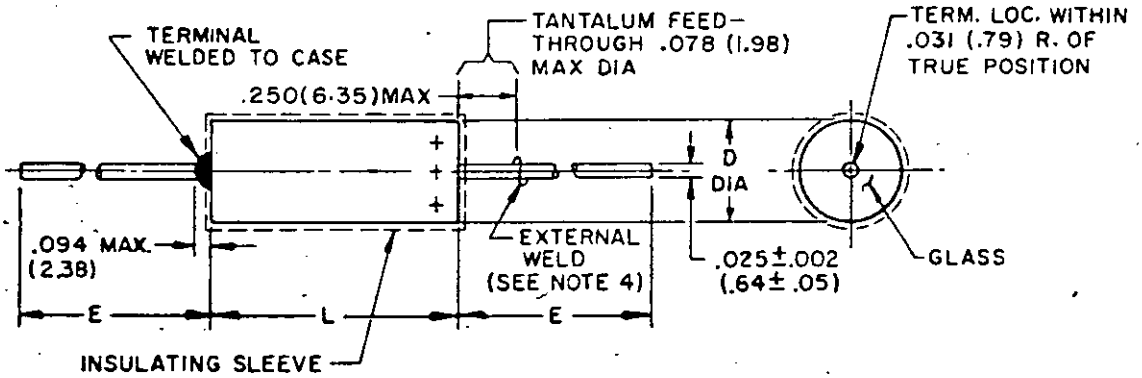



CIRCUIT DIAGRAM

Case size	Dimensions			
	Basic case		Insulated case	
	L 1/ +.031(.79) -.016(.41)	D ±.016(.41)	D max	E ±.250(6.35)
T1	.453(11.51)	.188(4.78)	.219 (5.56)	1.500(38.10)
T2	.641(16.28)	.281(7.14)	.312 (7.92)	2.250(57.15)
T3	.766(19.46)	.375(9.52)	.406(10.31)	2.250(57.15)
T4	1.062(26.97)	.375(9.52)	.406(10.31)	2.250(57.15)

1/ Length of basic case; sleeving shall be as specified in MIL-C-39006.

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are in parentheses.
3. Metric equivalents are given for general information only.
4. The weld shall not be enclosed in the end seal.

FIGURE 1. Style CLR81 capacitors.

FSC 5910

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:19Z
Check the source to verify that this is the current version before use.

TABLE I. Capacitor characteristics.

Rated 1/ voltage (+85°C)	Cap.	Cap. tolerance	DC leakage (max) +25°C	DC leakage (max) +85°C & +125°C	Dissipation factor (max)	Derated 1/ voltage (+125°C)	Surge voltage (+85°C)	Impedance (max)	Capacitance change at -55°C	Capacitance change at +85°C	Capacitance change at +125°C	Max 2/ 85°C 40 kHz ripple current	Case size	Part No. M39006/25- 3/ Failure rate level (%/1,000 hr) M(1.0)	P(0.1)	R(0.01)	S(0.001)
volts, dc	µF	percent	µA	µA	percent	volts, dc	volts, dc	ohms	percent	percent	percent	mA rms					
6	220	±20	2	9	50	4	6.9	36	-64	+13	+16	1000	T1	0001-	0089-	0177-	0265-
6	220	±10	2	9	50	4	6.9	36	-64	+13	+16	1000	T1	0002-	0090-	0178-	0266-
6	820	±20	3	14	155	4	6.9	18	-88	+16	+20	1500	T2	0003-	0091-	0179-	0267-
6	820	±10	3	14	155	4	6.9	18	-88	+16	+20	1500	T2	0004-	0092-	0180-	0268-
6	1500	±20	5	20	172	4	6.9	18	-90	+20	+25	1900	T3	0005-	0093-	0181-	0269-
6	1500	±10	5	20	172	4	6.9	18	-90	+20	+25	1900	T3	0006-	0094-	0182-	0270-
6	2200	±20	6	24	170	4	6.9	13	-90	+25	+30	2300	T4	0007-	0095-	0183-	0271-
6	2200	±10	6	24	170	4	6.9	13	-90	+25	+30	2300	T4	0008-	0096-	0184-	0272-
8	180	±20	2	9	41	5	9.2	45	-60	+13	+16	1000	T1	0009-	0097-	0185-	0273-
8	180	±10	2	9	41	5	9.2	45	-60	+13	+16	1000	T1	0010-	0098-	0186-	0274-
8	680	±20	3	14	130	5	9.2	22	-83	+16	+20	1500	T2	0011-	0099-	0187-	0275-
8	680	±10	3	14	130	5	9.2	22	-83	+16	+20	1500	T2	0012-	0100-	0188-	0276-
8	1500	±20	5	20	170	5	9.2	18	-90	+20	+25	1900	T3	0013-	0101-	0189-	0277-
8	1500	±10	5	20	170	5	9.2	18	-90	+20	+25	1900	T3	0014-	0102-	0190-	0278-
8	1800	±20	7	25	138	5	9.2	14	-90	+25	+30	2300	T4	0015-	0103-	0191-	0279-
8	1800	±10	7	25	138	5	9.2	14	-90	+25	+30	2300	T4	0016-	0104-	0192-	0280-
10	150	±20	2	9	34	7	11.5	54	-55	+13	+16	900	T1	0017-	0105-	0193-	0281-
10	150	±10	2	9	34	7	11.5	54	-55	+13	+16	900	T1	0018-	0106-	0194-	0282-
10	560	±20	3	16	106	7	11.5	27	-77	+16	+20	1450	T2	0019-	0107-	0195-	0283-
10	560	±10	3	16	106	7	11.5	27	-77	+16	+20	1450	T2	0020-	0108-	0196-	0284-
10	1200	±20	5	20	137	7	11.5	18	-88	+20	+25	1850	T3	0021-	0109-	0197-	0285-
10	1200	±10	5	20	137	7	11.5	18	-88	+20	+25	1850	T3	0022-	0110-	0198-	0286-
10	1500	±20	7	25	114	7	11.5	15	-88	+25	+30	2300	T4	0023-	0111-	0199-	0287-
10	1500	±10	7	25	114	7	11.5	15	-88	+25	+30	2300	T4	0024-	0112-	0200-	0288-
15	100	±20	2	9	30	10	17.2	72	-44	+13	+16	900	T1	0025-	0113-	0201-	0289-
15	100	±10	2	9	30	10	17.2	72	-44	+13	+16	900	T1	0026-	0114-	0202-	0290-
15	390	±20	3	16	74	10	17.2	31	-66	+16	+20	1450	T2	0027-	0115-	0203-	0291-
15	390	±10	3	16	74	10	17.2	31	-66	+16	+20	1450	T2	0028-	0116-	0204-	0292-
15	820	±20	6	24	111	10	17.2	22	-77	+20	+25	1800	T3	0029-	0117-	0205-	0293-
15	820	±10	6	24	111	10	17.2	22	-77	+20	+25	1800	T3	0030-	0118-	0206-	0294-
15	1000	±20	8	32	92	10	17.2	17	-77	+25	+30	2300	T4	0031-	0119-	0207-	0295-
15	1000	±10	8	32	92	10	17.2	17	-77	+25	+30	2300	T4	0032-	0120-	0208-	0296-
25	68	±20	2	9	22	15	28.8	90	-40	+12	+15	850	T1	0033-	0121-	0209-	0297-
25	68	±10	2	9	22	15	28.8	90	-40	+12	+15	850	T1	0034-	0122-	0210-	0298-
25	270	±20	3	16	55	15	28.8	33	-62	+13	+16	1400	T2	0035-	0123-	0211-	0299-
25	270	±10	3	16	55	15	28.8	33	-62	+13	+16	1400	T2	0036-	0124-	0212-	0300-
25	560	±20	7	28	76	15	28.8	24	-72	+20	+25	1750	T3	0037-	0125-	0213-	0301-
25	560	±10	7	28	76	15	28.8	24	-72	+20	+25	1750	T3	0038-	0126-	0214-	0302-
25	680	±20	8	32	63	15	28.8	19	-72	+25	+30	2100	T4	0039-	0127-	0215-	0303-
25	680	±10	8	32	63	15	28.8	19	-72	+25	+30	2100	T4	0040-	0128-	0216-	0304-
30	56	±20	2	9	22	20	34.5	100	-38	+12	+15	800	T1	0041-	0129-	0217-	0305-
30	56	±10	2	9	22	20	34.5	100	-38	+12	+15	800	T1	0042-	0130-	0218-	0306-
30	220	±20	3	16	42	20	34.5	36	-60	+13	+16	1200	T2	0043-	0131-	0219-	0307-
30	220	±10	3	16	42	20	34.5	36	-60	+13	+16	1200	T2	0044-	0132-	0220-	0308-
30	470	±20	8	32	64	20	34.5	25	-65	+20	+25	1500	T3	0045-	0133-	0221-	0309-
30	470	±10	8	32	64	20	34.5	25	-65	+20	+25	1500	T3	0046-	0134-	0222-	0310-
30	560	±20	9	36	55	20	34.5	20	-65	+25	+30	2000	T4	0047-	0135-	0223-	0311-
30	560	±10	9	36	55	20	34.5	20	-65	+25	+30	2000	T4	0048-	0136-	0224-	0312-
50	33	±20	2	9	12.3	30	57.5	135	-29	+10	+12	700	T1	0049-	0137-	0225-	0313-
50	33	±10	2	9	12.3	30	57.5	135	-29	+10	+12	700	T1	0050-	0138-	0226-	0314-
50	120	±20	4	24	22.5	30	57.5	49	-42	+12	+15	1200	T2	0051-	0139-	0227-	0315-
50	120	±10	4	24	22.5	30	57.5	49	-42	+12	+15	1200	T2	0052-	0140-	0228-	0316-
50	270	±20	8	32	37	30	57.5	29	-46	+20	+25	1450	T3	0053-	0141-	0229-	0317-
50	270	±10	8	32	37	30	57.5	29	-46	+20	+25	1450	T3	0054-	0142-	0230-	0318-
50	330	±20	9	36	38	30	57.5	22	-46	+25	+30	1900	T4	0055-	0143-	0231-	0319-
50	330	±10	9	36	38	30	57.5	22	-46	+25	+30	1900	T4	0056-	0144-	0232-	0320-
60	27	±20	3	12	10.2	40	69.0	144	-24	+10	+12	700	T1	0057-	0145-	0233-	0321-
60	27	±10	3	12	10.2	40	69.0	144	-24	+10	+12	700	T1	0058-	0146-	0234-	0322-
60	100	±20	4	20	19	40	69.0	54	-36	+12	+15	1100	T2	0059-	0147-	0235-	0323-
60	100	±10	4	20	19	40	69.0	54	-36	+12	+15	1100	T2	0060-	0148-	0236-	0324-
60	220	±20	8	32	30	40	69.0	29	-40	+16	+20	1400	T3	0061-	0149-	0237-	0325-
60	220	±10	8	32	30	40	69.0	29	-40	+16	+20	1400	T3	0062-	0150-	0238-	0326-

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:19Z
Check the source to verify that this is the current version before use.

TABLE I. Capacitor characteristics - Continued.

Rated 1/ voltage (+85°C)	Cap.	Cap. tolerance	DC leakage (max) +25°C	DC leakage (max) +85°C & +125°C	Dissipation factor (max)	Derated 1/ voltage (+125°C)	Surge voltage (+85°C)	Impedance (max)	Capacitance change at -55°C	Capacitance change at +85°C	Capacitance change at +125°C	Max 2/ 85°C 40 kHz ripple current	Case size	Part No. M39006/25- 3/ Failure rate level (%/1,000 hr) M(1.0)	P(0.1)	R(0.01)	S(0.001)
volts, dc	µF	percent	µA	µA	percent	volts, dc	volts, dc	ohms	percent	percent	percent	mA rms					
60	270	±20	9	36	27	40	69.0	23	-45	+20	+25	1850	T4	0063-	0151-	0239-	0327-
60	270	±10	9	36	27	40	69.0	23	-45	+20	+25	1850	T4	0064-	0152-	0240-	0328-
75	22	±20	3	12	8.5	50	86.2	157	-19	+10	+12	600	T1	0065-	0153-	0241-	0329-
75	22	±10	3	12	8.5	50	86.2	157	-19	+10	+12	600	T1	0066-	0154-	0242-	0330-
75	82	±20	4	24	15.2	50	86.2	63	-30	+12	+15	1000	T2	0067-	0155-	0243-	0331-
75	82	±10	4	24	15.2	50	86.2	63	-30	+12	+15	1000	T2	0068-	0156-	0244-	0332-
75	180	±20	9	36	24.4	50	86.2	30	-35	+16	+20	1300	T3	0069-	0157-	0245-	0333-
75	180	±10	9	36	24.4	50	86.2	30	-35	+16	+20	1300	T3	0070-	0158-	0246-	0334-
75	220	±20	10	40	37.0	50	86.2	24	-40	+20	+25	1800	T4	0071-	0159-	0247-	0335-
75	220	±10	10	40	37.0	50	86.2	24	-40	+20	+25	1800	T4	0072-	0160-	0248-	0336-
100	10	±20	3	12	4.5	65	115.0	200	-17	+10	+12	800	T1	0073-	0161-	0249-	0337-
100	10	±10	3	12	4.5	65	115.0	200	-17	+10	+12	800	T1	0074-	0162-	0250-	0338-
100	39	±20	5	24	10.4	65	115.0	80	-20	+12	+15	1300	T2	0075-	0163-	0251-	0339-
100	39	±10	5	24	10.4	65	115.0	80	-20	+12	+15	1300	T2	0076-	0164-	0252-	0340-
100	68	±20	10	40	11.3	65	115.0	40	-30	+14	+16	1600	T3	0077-	0165-	0253-	0341-
100	68	±10	10	40	11.3	65	115.0	40	-30	+14	+16	1600	T3	0078-	0166-	0254-	0342-
100	120	±20	12	48	25	65	115.0	30	-35	+15	+17	2000	T4	0079-	0167-	0255-	0343-
100	120	±10	12	48	25	65	115.0	30	-35	+15	+17	2000	T4	0080-	0168-	0256-	0344-
125	6.8	±20	3	12	6.0	85	144.0	300	-14	+10	+12	700	T1	0081-	0169-	0257-	0345-
125	6.8	±10	3	12	6.0	85	144.0	300	-14	+10	+12	700	T1	0082-	0170-	0258-	0346-
125	27	±20	5	24	7.2	85	144.0	90	-18	+12	+15	1200	T2	0083-	0171-	0259-	0347-
125	27	±10	5	24	7.2	85	144.0	90	-18	+12	+15	1200	T2	0084-	0172-	0260-	0348-
125	47	±20	10	40	7.9	85	144.0	50	-26	+14	+16	1500	T3	0085-	0173-	0261-	0349-
125	47	±10	10	40	7.9	85	144.0	50	-26	+14	+16	1500	T3	0086-	0174-	0262-	0350-
125	82	±20	12	48	17.4	85	144.0	32	-30	+15	+17	1900	T4	0087-	0175-	0263-	0351-
125	82	±10	12	48	17.4	85	144.0	32	-30	+15	+17	1900	T4	0088-	0176-	0264-	0352-

1/ Reverse voltage rating at 85°C is 3 V dc, and at 125°C is 2 V dc.
2/ For ripple current limits at various temperatures, voltages, and frequencies, see table II.
3/ Dash number will include the letter "H" to indicate the optional vibration and shock requirements (i.e., 51 g random vibration, 80 g sinusoidal vibration, and 500 g shock) or "-" will be deleted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:19Z
Check the source to verify that this is the current version before use.

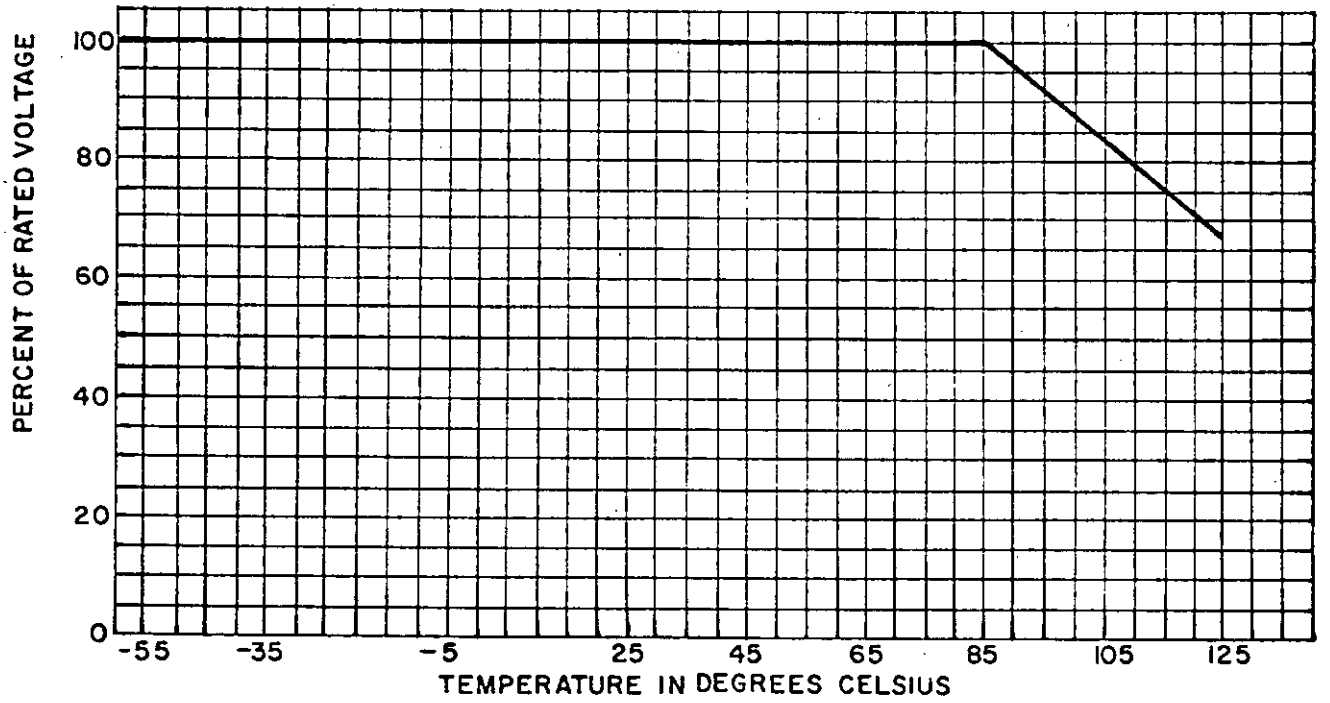


FIGURE 2. Voltage derating with temperature.

REQUIREMENTS:

Design and construction:

Dimensions and configuration - See figure 1.
Case type - Tantalum, tubular, insulated.
Seal type - Hermetic (glass-to-tantalum anode).
Terminals - Axial-wire lead:
Cathode and anode (type N4 of MIL-STD-1276).
Rated temperature - -55°C to +85°C, voltage derated to +125°C (see figure 2).
Rated voltage - See table I.
Capacitance (Cap.) (nom) - See table I.
Cap. tolerance - ±10 or ±20 percent (see table I).
FR level - M, P, R, and S (see table I).

DC leakage (DCL) (max) (at 25°C): See table I.

Cap (nom): Method 305 of MIL-STD-202. See table I.

Dissipation factor (DF) (max): See table I.

Seal: Method 112 of MIL-STD-202, conditions A and C.

Shock (specified pulse): Method 213 of MIL-STD-202, condition I (100g) or condition D (500g), as applicable.

Vibration, high frequency: Method 204 of MIL-STD-202, condition D (20g). or condition H (80g), as applicable.

Random vibration (when applicable): Method 214 of MIL-STD-202, test condition II-K (51g).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:19Z
Check the source to verify that this is the current version before use.

Thermal shock: Method 107 of MIL-STD-202, condition A (with step 3 at +125°C).
Number of cycles - 300 for qualification and group C - 30 for group B.
DCL - 200% (max) of 25°C value of table I for qualification and group C.
DCL - 125% (max) of 25°C value of table I for group B.
ΔCap. - Within ±5% of initial measurement.
DF - 115% (max) of initial measurement.

Salt spray (corrosion): Method 101 of MIL-STD-202, condition B (48 hrs).

Solderability: Method 208 of MIL-STD-202.

Terminal strength:
Pull - Method 211 of MIL-STD-202, condition A.
Wire-lead bend - In accordance with MIL-C-39006.

Surge voltage: See table I.

Moisture resistance: Method 106 of MIL-STD-202.
DCL - 125% (max) of 25°C value of table I.
ΔCap. - Within ±8% of initial measurement.
DF - 115% (max) of initial requirement.

Dielectric withstanding voltage (DWV): Method 301 of MIL-STD-202. 2,000 V dc, min.

Insulation resistance (IR): Method 302 of MIL-STD-202, condition B. 100 megohms, min.

Low temperature (storage): Method 502 of MIL-STD-810.
DCL - See table I.
ΔCap. - Within ±5% of initial measurement.
DF - See table I.

Stability at low and high temperatures:
Step 1 (+25°C):
DCL - See table I.
Cap. - Within tolerance of table I value.
DF - See table I.
Step 2 (-55°C):
Imp. - See table I.
ΔCap. - See table I.
Step 3 (+25°C):
DCL - See table I.
ΔCap. - Within ±5% of step 1 value.
DF - See table I.
Step 4 (+85°C):
DCL - See table I.
ΔCap. - See table I.
DF - See table I.
Step 5 (+125°C):
DCL - See table I.
ΔCap. - See table I.
DF - See table I.
Step 6 (+25°C):
DCL - See table I.
ΔCap. - Within ±5% of step 1 value.
DF - See table I.

Reverse voltage: As specified in MIL-C-39006.
DCL - See table I.
Cap. - Within tolerance of table I value.
DF - See table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:19Z
Check the source to verify that this is the current version before use.

Life at 85°C: Method 108 of MIL-STD-202.
2,000-hr (qualification):
DCL - See table I.
ΔCap. - Within ±10% of initial measurement.
DF - See table I.

10,000-hr (group B) and extended life:
DCL (85°C) - 125% (max) of table I value.
DCL (25°C) - See table I.
ΔCap. - Within +10%, -20% of initial measurement.
DF - 200% (max) of table I value.
DWV - 2,000 V dc, min.
IR - 100 megohms, min.

AC ripple life at 85°C (qualification and group C):
Test ripple current - See table I.
Test voltage - 66.67% of rated voltage (see table I).
DCL - See table I.
ΔCap. - Within ±10% of initial measurement.
DF - See table I.

Vacuum life: Not applicable.

Life at 125°C: Method 108 of MIL-STD-202.
DCL - See table I.
ΔCap. - Within ±10% of initial measurement.
DF - See table I.
DWV - 2,000 V dc, min.
IR - 100 megohms, min.

10,000-hr (group B):
DCL (125°C) - 125% (max) of table I value.
DCL (25°C) - See table I.
ΔCap. - Within +10%, -20% of initial measurement.
DF - 200% (max) of table I value.
DWV - 2,000 V dc, min.
IR - 100 megohms, min.

Barometric pressure: Method 105 of MIL-STD-202, condition E (150,000 ft).
Test voltage - Rated voltage.

Resistance to soldering heat: Method 210 of MIL-STD-202, condition B.
DCL - See table I.
ΔCap. - Within ±5% of initial measurement.
DF - See table I.

Marking: In accordance with MIL-C-39006.
Polarity - Series of plus (+) symbols encircling positive end (see figure 1).

Voltage groups (85°C rated voltage):

I - - - - - - - - - - - 6 to 15 V inclusive

II - - - - - - - - - - - 25 to 75 V inclusive

III - - - - - - - - - - - 100 and 125 V inclusive

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:19Z
Check the source to verify that this is the current version before use.

TABLE II. Ripple current multipliers vs frequency, temperature, and applied peak voltage.

Frequency of applied ripple current		120 Hz				800 Hz				1 kHz				10 kHz				40 kHz				100 kHz			
Ambient still air		Temp °C				Temp °C				Temp °C				Temp °C				Temp °C				Temp °C			
		≤55°	85°	105°	125°	≤55°	85°	105°	125°	≤55°	85°	105°	125°	≤55°	85°	105°	125°	≤55°	85°	105°	125°	≤55°	85°	105°	125°
% of 85°C rated peak voltage	100%	.60	.39	--	--	.71	.43	--	--	.72	.45	--	--	.88	.55	--	--	1.0	.63	--	--	1.1	.69	--	--
	90%	.60	.46	--	--	.71	.55	--	--	.72	.55	--	--	.88	.67	--	--	1.0	.77	--	--	1.1	.85	--	--
	80%	.60	.52	.35	--	.71	.62	.42	--	.72	.62	.42	--	.88	.76	.52	--	1.0	.87	.59	--	1.1	.96	.65	--
	70%	.60	.58	.44	--	.71	.69	.52	--	.72	.70	.52	--	.88	.85	.64	--	1.0	.97	.73	--	1.1	1.07	.80	--
	66 2/3%	.60	.60	.46	.27	.71	.71	.55	.32	.72	.72	.55	.32	.88	.88	.68	.40	1.0	1.0	.77	.45	1.1	1.1	.85	.50

NOTES:
1. At 125°C the rated voltage of the capacitors decreases to 66 2/3% of the 85°C rated voltage.
2. The peak of the applied ac ripple voltage plus the applied dc voltage must not exceed the dc voltage rating of the capacitor either forward or reverse.
3. The ripple current listed in table I represents a rating calculated using a maximum internal temperature rise (ΔT) of 50°C at 40 kHz at 85°C ambient with a maximum peak rated voltage of 66 2/3% of the 85°C peak voltage rating.
4. The maximum allowable internal temperature rise (ΔT) decreases linearly to a calculated 10°C rise at 125°C ambient.
5. The internal temperature rise is directly proportional to the ESR of the capacitor, and ESR increases with decreasing frequency.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:19Z
Check the source to verify that this is the current version before use.

Custodians:
Army - ER
Navy - EC
Air Force - 11

Review activities:
Army - AR
Navy - EC
Air Force - 17, 85, 99
DLA - ES

User activities:
Navy - AS, MC, OS
Air Force - 19

Agent:
DLA - ES

Preparing activity:
Navy - EC

(Project 5910-1475)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:19Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY
Naval Electronic Systems Command
Washington, DC 20363

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

COMMANDER
NAVAL ELECTRONIC SYSTEMS COMMAND
DEFENSE STANDARDIZATION PROGRAM BRANCH
DEPARTMENT OF THE NAVY
WASHINGTON, DC 20363
ATTN: ELEX 8111

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:19Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-C-39006/25	CAPACITORS, FIXED, ELECTROLYTIC, TANTALUM

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*: _____
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:19Z
Check the source to verify that this is the current version before use.