
INCH-POUND
MIL-PRF-39006/31B
20 October 2005
SUPERSEDING
MIL-PRF-39006/31A
17 April 2002

PERFORMANCE SPECIFICATION SHEET

CAPACITORS, FIXED, ELECTROLYTIC (NONSOLID ELECTROLYTE), TANTALUM, (POLARIZED, SINTERED SLUG), (EXTENDED RANGE), 85°C (VOLTAGE DERATED TO 125°C), ESTABLISHED RELIABILITY, STYLE CLR91

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this document and MIL-PRF-39006.

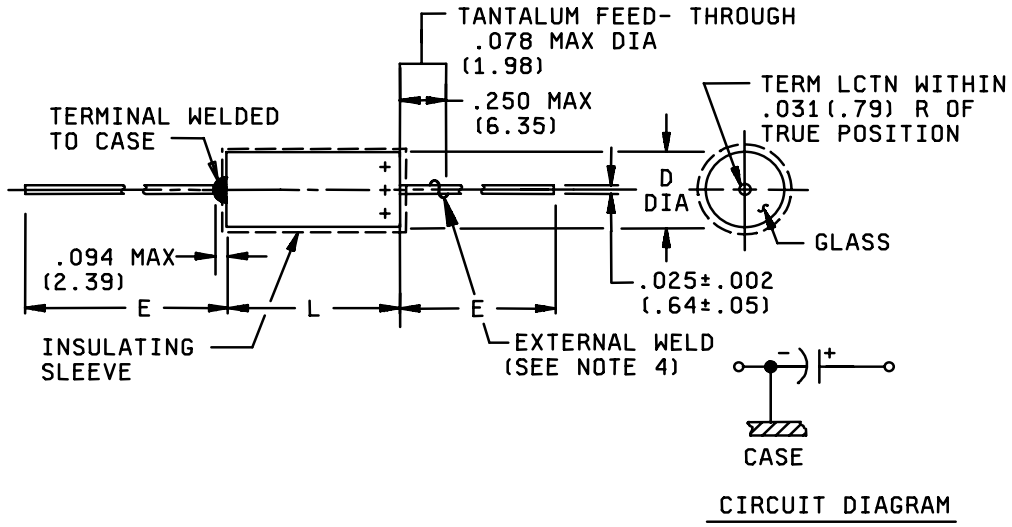

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are in parentheses.
3. Metric equivalents are given for general information only.
4. The weld shall not be enclosed in the end seal.

FIGURE 1. Style CLR91 capacitors.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:20Z
Check the source to verify that this is the current version before use.

Case size	Dimensions			
	Basic case		Insulated case	
	L 1/ +.031 (0.79) -.016 (0.41)	D ±.016 (0.41)	D max	E ±.250 (6.35)
T1	.453 (11.51)	.188 (4.78)	.219 (5.56)	1.500 (38.10)
T2	.641 (16.28)	.281 (7.14)	.312 (7.92)	2.250 (57.15)
T3	.766 (19.46)	.375 (9.52)	.406 (10.31)	2.250 (57.15)
T4	1.062 (26.97)	.375 (9.52)	.406 (10.31)	2.250 (57.15)

1/ Length of basic case sleeving shall be as specified in MIL-PRF-39006.

FIGURE 1. Style CLR91 capacitors - Continued.

QUALIFICATION:

A manufacturer shall be considered qualified to this specification sheet by similarity if the manufacturer is qualified to style CLR81 capacitors in MIL-PRF-39006/25 and if the design and construction of the capacitors in this specification sheet is the same as the design and construction of the capacitors covered by MIL-PRF-39006/25.

REQUIREMENTS:

Design and construction:

Dimensions and configuration: See figure 1.

Case type: Tantalum, tubular, insulated.

Seal type: Hermetic (glass-to-tantalum anode).

Terminals: Axial-wire lead: Cathode and anode (type N32, N51, or N52 of MIL-STD-1276).

Rated temperature: -55°C to +85°C, voltage derated to +125°C (see figure 2).

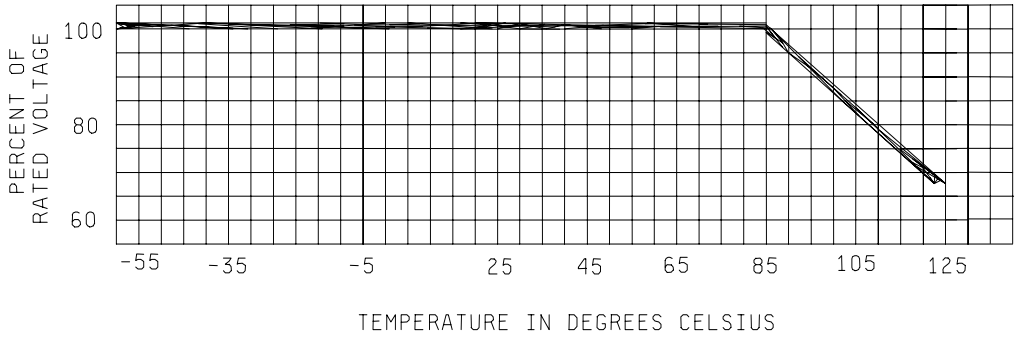


FIGURE 2. Voltage derating with temperature.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:20Z
Check the source to verify that this is the current version before use.

Rated voltage: See table I.

Capacitance (Cap.) nominal (nom): See table I.

Cap. tolerance: ±10 percent or ±20 percent (see table I).

FR level: M, P, R, and S (see table I).

DC leakage (DCL) (max) (at +25°C): See table I.

Cap. (nominal): Method 305 of MIL-STD-202.

Dissipation factor (DF) (max): See table I.

Seal: Method 112 of MIL-STD-202, conditions A or D, and C.

Shock (specified pulse): Method 213 of MIL-STD-202, condition I (100 g's) or condition D (500 g's), as applicable.

Vibration, high frequency: Method 204 of MIL-STD-202, condition D (20 g's) or condition H (80 g's), as applicable.

Random vibration (when applicable): Method 214 of MIL-STD-202, test condition II-K (51 g's).

Thermal shock: Method 107 of MIL-STD-202, condition A (with step 3 at +125°C).

* Number of cycles: In accordance with MIL-PRF-39006, the following shall apply.

DCL: 200 percent (max) of +25°C value of table I for qualification and group C.

DCL: 125 percent (max) of +25°C value of table I for group B.

ΔCap: Within ±5 percent of initial measurement.

DF: 115 percent (max) of initial requirement.

Salt spray (corrosion): Method 101 of MIL-STD-202, condition B (48 hours).

Solderability: Method 208 of MIL-STD-202.

Terminal strength:

Pull: Method 211 of MIL-STD-202, condition A.

Wire-lead bend: In accordance with MIL-PRF-39006.

Surge voltage: See table I.

Moisture resistance: Method 106 of MIL-STD-202.

DCL: 125 percent (max) of +25°C value of table I.

ΔCap: Within ±8 percent of initial measurement.

DF: 115 percent (max) of initial requirement.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:20Z
Check the source to verify that this is the current version before use.

TABLE I. Capacitor characteristics.

Rated voltage (+85°C) 1/ V dc	Cap. µF	Cap. tolerance percent	DC leakage (max) +25°C µA	DC leakage (max) +85°C, +125°C µA	Dissipation factor (max) percent	ESR at +25°C (max) 2/ Ohms	Derated voltage (+125°C) 1/ V dc	Surge voltage (+85°C) V dc	Impedance (max) Ohms	Capacitance change at -55°C percent	Capacitance change at +85°C percent	Capacitance change at +125°C percent	Max 85°C 40 kHz ripple current 3/ mA rms	Case size	PIN M39006/31- 4/ Failure rate level (%/1,000 hour) M(1.0)	P(0.1)	R(0.01)	S(0.001)
6	220	±20	2	9	25	1.51	4	6.9	36	-64	+13	+16	1,000	T1	0001-	0089-	0177-	0265-
6	220	±10	2	9	25	1.51	4	6.9	36	-64	+13	+16	1,000	T1	0002-	0090-	0178-	0266-
6	820	±20	3	14	77.5	1.26	4	6.9	18	-88	+16	+20	1,500	T2	0003-	0091-	0179-	0267-
6	820	±10	3	14	77.5	1.26	4	6.9	18	-88	+16	+20	1,500	T2	0004-	0092-	0180-	0268-
6	1,500	±20	5	20	86	0.76	4	6.9	18	-90	+20	+25	1,900	T3	0005-	0093-	0181-	0269-
6	1,500	±10	5	20	86	0.76	4	6.9	18	-90	+20	+25	1,900	T3	0006-	0094-	0182-	0270-
6	2,200	±20	6	24	85	0.52	4	6.9	13	-90	+25	+30	2,300	T4	0007-	0095-	0183-	0271-
6	2,200	±10	6	24	85	0.52	4	6.9	13	-90	+25	+30	2,300	T4	0008-	0096-	0184-	0272-
8	180	±20	2	9	20.5	1.51	5	9.2	45	-60	+13	+16	1,000	T1	0009-	0097-	0185-	0273-
8	180	±10	2	9	20.5	1.51	5	9.2	45	-60	+13	+16	1,000	T1	0010-	0098-	0186-	0274-
8	680	±20	3	14	65	1.27	5	9.2	22	-83	+16	+20	1,500	T2	0011-	0099-	0187-	0275-
8	680	±10	3	14	65	1.27	5	9.2	22	-83	+16	+20	1,500	T2	0012-	0100-	0188-	0276-
8	1,500	±20	5	20	85	0.75	5	9.2	18	-90	+20	+25	1,900	T3	0013-	0101-	0189-	0277-
8	1,500	±10	5	20	85	0.75	5	9.2	18	-90	+20	+25	1,900	T3	0014-	0102-	0190-	0278-
8	1,800	±20	7	25	69	0.51	5	9.2	14	-90	+25	+30	2,300	T4	0015-	0103-	0191-	0279-
8	1,800	±10	7	25	69	0.51	5	9.2	14	-90	+25	+30	2,300	T4	0016-	0104-	0192-	0280-
10	150	±20	2	9	17	1.51	7	11.5	54	-55	+13	+16	900	T1	0017-	0105-	0193-	0281-
10	150	±10	2	9	17	1.51	7	11.5	54	-55	+13	+16	900	T1	0018-	0106-	0194-	0282-
10	560	±20	3	16	53	1.26	7	11.5	27	-77	+16	+20	1,450	T2	0019-	0107-	0195-	0283-
10	560	±10	3	16	53	1.26	7	11.5	27	-77	+16	+20	1,450	T2	0020-	0108-	0196-	0284-
10	1,200	±20	5	20	68.5	0.76	7	11.5	18	-88	+20	+25	1,850	T3	0021-	0109-	0197-	0285-
10	1,200	±10	5	20	68.5	0.76	7	11.5	18	-88	+20	+25	1,850	T3	0022-	0110-	0198-	0286-
10	1,500	±20	7	25	57	0.51	7	11.5	15	-88	+25	+30	2,300	T4	0023-	0111-	0199-	0287-
10	1,500	±10	7	25	57	0.51	7	11.5	15	-88	+25	+30	2,300	T4	0024-	0112-	0200-	0288-
15	100	±20	2	9	15	1.99	10	17.2	72	-44	+13	+16	900	T1	0025-	0113-	0201-	0289-
15	100	±10	2	9	15	1.99	10	17.2	72	-44	+13	+16	900	T1	0026-	0114-	0202-	0290-
15	390	±20	3	16	37	1.26	10	17.2	31	-66	+16	+20	1,450	T2	0027-	0115-	0203-	0291-
15	390	±10	3	16	37	1.26	10	17.2	31	-66	+16	+20	1,450	T2	0028-	0116-	0204-	0292-
15	820	±20	6	24	55.5	0.90	10	17.2	22	-77	+20	+25	1,800	T3	0029-	0117-	0205-	0293-
15	820	±10	6	24	55.5	0.90	10	17.2	22	-77	+20	+25	1,800	T3	0030-	0118-	0206-	0294-
15	1,000	±20	8	32	46	0.61	10	17.2	17	-77	+25	+30	2,300	T4	0031-	0119-	0207-	0295-
15	1,000	±10	8	32	46	0.61	10	17.2	17	-77	+25	+30	2,300	T4	0032-	0120-	0208-	0296-
25	68	±20	2	9	11	2.15	15	28.8	90	-40	+12	+15	850	T1	0033-	0121-	0209-	0297-
25	68	±10	2	9	11	2.15	15	28.8	90	-40	+12	+15	850	T1	0034-	0122-	0210-	0298-
25	270	±20	3	16	27.5	1.35	15	28.8	33	-62	+13	+16	1,400	T2	0035-	0123-	0211-	0299-
25	270	±10	3	16	27.5	1.35	15	28.8	33	-62	+13	+16	1,400	T2	0036-	0124-	0212-	0300-

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:20Z
Check the source to verify that this is the current version before use.

TABLE I. Capacitor characteristics - Continued.

Rated voltage (+85°C) 1/ V dc	Cap. µF	Cap. tolerance percent	DC leakage (max) +25°C µA	DC leakage (max) +85°C, +125°C µA	Dissipation factor (max) percent	ESR at +25°C (max) 2/ Ohms	Derated voltage (+125°C) 1/ V dc	Surge voltage (+85°C) V dc	Impedance (max) Ohms	Capacitance change at -55°C percent	Capacitance change at +85°C percent	Capacitance change at +125°C percent	Max 85°C 40 kHz ripple current 3/ mA rms	Case size	PIN M39006/31- 4/ Failure rate level (%/1,000 hour) M(1.0)	P(0.1)	R(0.01)	S(0.001)
25	560	±20	7	28	38	0.90	15	28.8	24	-72	+20	+25	1,750	T3	0037-	0125-	0213-	0301-
25	560	±10	7	28	38	0.90	15	28.8	24	-72	+20	+25	1,750	T3	0038-	0126-	0214-	0302-
25	680	±20	8	32	31.5	0.62	15	28.8	19	-72	+25	+30	2,100	T4	0039-	0127-	0215-	0303-
25	680	±10	8	32	31.5	0.62	15	28.8	19	-72	+25	+30	2,100	T4	0040-	0128-	0216-	0304-
30	56	±20	2	9	11	2.61	20	34.5	100	-38	+12	+15	800	T1	0041-	0129-	0217-	0305-
30	56	±10	2	9	11	2.61	20	34.5	100	-38	+12	+15	800	T1	0042-	0130-	0218-	0306-
30	220	±20	3	16	21	1.27	20	34.5	36	-60	+13	+16	1,200	T2	0043-	0131-	0219-	0307-
30	220	±10	3	16	21	1.27	20	34.5	36	-60	+13	+16	1,200	T2	0044-	0132-	0220-	0308-
30	470	±20	8	32	32	0.91	20	34.5	25	-65	+20	+25	1,500	T3	0045-	0133-	0221-	0309-
30	470	±10	8	32	32	0.91	20	34.5	25	-65	+20	+25	1,500	T3	0046-	0134-	0222-	0310-
30	560	±20	9	36	27.5	0.65	20	34.5	20	-65	+25	+30	2,000	T4	0047-	0135-	0223-	0311-
30	560	±10	9	36	27.5	0.65	20	34.5	20	-65	+25	+30	2.000	T4	0048-	0136-	0224-	0312-
50	33	±20	2	9	6.15	2.48	30	57.5	135	-29	+10	+12	700	T1	0049-	0137-	0225-	0313-
50	33	±10	2	9	6.15	2.48	30	57.5	135	-29	+10	+12	700	T1	0050-	0138-	0226-	0314-
50	120	±20	4	24	11.25	1.25	30	57.5	49	-42	+12	+15	1,200	T2	0051-	0139-	0227-	0315-
50	120	±10	4	24	11.25	1.25	30	57.5	49	-42	+12	+15	1,200	T2	0052-	0140-	0228-	0316-
50	270	±20	8	32	18.5	0.91	30	57.5	29	-46	+20	+25	1,450	T3	0053-	0141-	0229-	0317-
50	270	±10	8	32	18.5	0.91	30	57.5	29	-46	+20	+25	1,450	T3	0054-	0142-	0230-	0318-
50	330	±20	9	36	19	0.77	30	57.5	22	-46	+25	+30	1,900	T4	0055-	0143-	0231-	0319-
50	330	±10	9	36	19	0.77	30	57.5	22	-46	+25	+30	1,900	T4	0056-	0144-	0232-	0320-
60	27	±20	3	12	5.1	2.51	40	69.0	144	-24	+10	+12	700	T1	0057-	0145-	0233-	0321-
60	27	±10	3	12	5.1	2.51	40	69.0	144	-24	+10	+12	700	T1	0058-	0146-	0234-	0322-
60	100	±20	4	20	9.5	1.26	40	69.0	54	-36	+12	+15	1.100	T2	0059-	0147-	0235-	0323-
60	100	±10	4	20	9.5	1.26	40	69.0	54	-36	+12	+15	1,100	T2	0060-	0148-	0236-	0324-
60	220	±20	8	32	15	0.91	40	69.0	29	-40	+16	+20	1,400	T3	0061-	0149-	0237-	0325-
60	220	±10	8	32	15	0.91	40	69.0	29	-40	+16	+20	1,400	T3	0062-	0150-	0238-	0326-
60	270	±20	9	36	13.5	0.67	40	69.0	23	-45	+20	+25	1,850	T4	0063-	0151-	0239-	0327-
60	270	±10	9	36	13.5	0.67	40	69.0	23	-45	+20	+25	1,850	T4	0064-	0152-	0240-	0328-
75	22	±20	3	12	4.25	2.57	50	86.2	157	-19	+10	+12	600	T1	0065-	0153-	0241-	0329-
75	22	±10	3	12	4.25	2.57	50	86.2	157	-19	+10	+12	600	T1	0066-	0154-	0242-	0330-
75	82	±20	4	24	7.6	1.23	50	86.2	63	-30	+12	+15	1,000	T2	0067-	0155-	0243-	0331-
75	82	±10	4	24	7.6	1.23	50	86.2	63	-30	+12	+15	1,000	T2	0068-	0156-	0244-	0332-
75	180	±20	9	36	12.2	0.90	50	86.2	30	-35	+16	+20	1,300	T3	0069-	0157-	0245-	0333-
75	180	±10	9	36	12.2	0.90	50	86.2	30	-35	+16	+20	1,300	T3	0070-	0158-	0246-	0334-
75	220	±20	10	40	18.5	1.12	50	86.2	24	-40	+20	+25	1,800	T4	0071-	0159-	0247-	0335-
75	220	±10	10	40	18.5	1.12	50	86.2	24	-40	+20	+25	1,800	T4	0072-	0160-	0248-	0336-

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:20Z
Check the source to verify that this is the current version before use.

TABLE I. Capacitor characteristics - Continued.

Rated voltage (+85°C) 1/ V dc	Cap. µF	Cap. tolerance percent	DC leakage (max) +25°C µA	DC leakage (max) +85°C, +125°C µA	Dissipation factor (max) percent	ESR at +25°C (max) 2/ Ohms	Derated voltage (+125°C) 1/ V dc	Surge voltage (+85°C) V dc	Impedance (max) Ohms	Capacitance change at -55°C percent	Capacitance change at +85°C percent	Capacitance change at +125°C percent	Max 85°C 40 kHz ripple current 3/ mA rms	Case size	PIN M39006/31- 4/ Failure rate level (%/1,000 hour) M(1.0)	P(0.1)	R(0.01)	S(0.001)
100	10	±20	3	12	2.25	2.99	65	115.0	200	-17	+10	+12	800	T1	0073-	0161-	0249-	0337-
100	10	±10	3	12	2.25	2.99	65	115.0	200	-17	+10	+12	800	T1	0074-	0162-	0250-	0338-
100	39	±20	5	24	5.2	1.77	65	115.0	80	-20	+12	+15	1,300	T2	0075-	0163-	0251-	0339-
100	39	±10	5	24	5.2	1.77	65	115.0	80	-20	+12	+15	1,300	T2	0076-	0164-	0252-	0340-
100	68	±20	10	40	5.65	1.11	65	115.0	40	-30	+14	+16	1,600	T3	0077-	0165-	0253-	0341-
100	68	±10	10	40	5.65	1.11	65	115.0	40	-30	+14	+16	1,600	T3	0078-	0166-	0254-	0342-
100	120	±20	12	48	12.5	1.38	65	115.0	30	-35	+15	+17	2,000	T4	0079-	0167-	0255-	0343-
100	120	±10	12	48	12.5	1.38	65	115.0	30	-35	+15	+17	2,000	T4	0080-	0168-	0256-	0344-
125	6.8	±20	3	12	3	5.86	85	144.0	300	-14	+10	+12	700	T1	0081-	0169-	0257-	0345-
125	6.8	±10	3	12	3	5.86	85	144.0	300	-14	+10	+12	700	T1	0082-	0170-	0258-	0346-
125	27	±20	5	24	3.6	1.77	85	144.0	90	-18	+12	+15	1,200	T2	0083-	0171-	0259-	0347-
125	27	±10	5	24	3.6	1.77	85	144.0	90	-18	+12	+15	1,200	T2	0084-	0172-	0260-	0348-
125	47	±20	10	40	3.95	1.12	85	144.0	50	-26	+14	+16	1,500	T3	0085-	0173-	0261-	0349-
125	47	±10	10	40	3.95	1.12	85	144.0	50	-26	+14	+16	1,500	T3	0086-	0174-	0262-	0350-
125	82	±20	12	48	8.7	1.41	85	144.0	32	-30	+15	+17	1,900	T4	0087-	0175-	0263-	0351-
125	82	±10	12	48	8.7	1.41	85	144.0	32	-30	+15	+17	1,900	T4	0088-	0176-	0264-	0352-

1/ Reverse voltage rating at 85°C is 3 V dc and at 125°C is 2 V dc.

2/ Maximum ESR is calculated by the following equation:

$$\text{ESR (max)} = \frac{DF}{2\pi f C}, \text{ where:}$$

DF = Maximum dissipation factor from table 1;
f = 120 Hz;
C = Nominal capacitance.

3/ For ripple current limits at various temperatures, voltages, and frequencies, see table II.

4/ Dash number shall include the letter “H” to indicate the optional vibration and shock requirements (i.e., 53.79 g’s random vibration, 80 g’s sinusoidal vibration, and 500 g’s shock) or the “-“ will be deleted. The acquiring activity may substitute an “H” designated part in place of a non “H” designated part at their option.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:20Z
Check the source to verify that this is the current version before use.

TABLE II. Ripple current multipliers versus frequency, temperature, and applied peak voltage. 1/ 2/ 3/ 4/ 5/

Frequency of applied ripple current		120 Hz				800 Hz				1 kHz				10 kHz				40 kHz				100 kHz			
		Temp °C				Temp °C				Temp °C				Temp °C				Temp °C				Temp °C			
Ambient still air		≤55°	85°	105°	125°	≤55°	85°	105°	125°	≤55°	85°	105°	125°	≤55°	85°	105°	125°	≤55°	85°	105°	125°	≤55°	85°	105°	125°
	100 percent	.60	.39	---	---	.71	.43	---	---	.72	.45	---	---	.88	.55	---	---	1.0	.63	---	---	1.1	.69	---	---
	90 percent	.60	.46	---	---	.71	.55	---	---	.72	.55	---	---	.88	.67	---	---	1.0	.77	---	---	1.1	.85	---	---
6/	80 percent	.60	.52	.35	---	.71	.62	.42	---	.72	.62	.42	---	.88	.76	.52	---	1.0	.87	.59	---	1.1	.96	.65	---
	70 percent	.60	.58	.44	---	.71	.69	.52	---	.72	.70	.52	---	.88	.85	.64	---	1.0	.97	.73	---	1.1	1.07	.80	---
	≤ 66 2/3 percent	.60	.60	.46	.27	.71	.71	.55	.32	.72	.72	.55	.32	.88	.88	.68	.40	1.0	1.0	.77	.45	1.1	1.1	.85	.50

1/ At 125°C, the rated voltage of the capacitors decreases to 66.67 percent of the 85°C rated voltage.

2/ The peak of the applied ac ripple voltage plus the applied dc voltage must not exceed the dc voltage rating of the capacitor either forward or reverse.

3/ The ripple current listed in table I represents a rating calculated by using a maximum internal temperature rise (ΔT) at 50°C at 40 kHz and at 85°C ambient temperature, with a maximum peak rated voltage of 66.67 percent of the 85°C peak voltage rating.

4/ The maximum allowable internal temperature rise (ΔT) decreases linearly to a calculated 10°C rise at 125°C ambient.

5/ The internal temperature rise is directly proportional to the ESR of the capacitor, and ESR increases with decreasing frequency.

6/ Percentage of 85°C rated peak voltage.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:20Z
Check the source to verify that this is the current version before use.

Dielectric withstanding voltage (DWV): Method 301 of MIL-STD-202. 2,000 V dc, minimum.

Insulation resistance (IR): Method 302 of MIL-STD-202, condition B. 100 megohms, minimum.

Low temperature (storage): Method 502 of MIL-STD-810.

DCL: See table I.

ΔCap: Within ±5 percent of initial measurement.

DF: See table I.

Stability at low and high temperatures:

Step 1 (+25°C):

DCL: See table I.

ΔCap: Within tolerance of table I value.

DF: See table I.

Step 2 (-55°C):

Impedance. See table I.

ΔCap: See table I.

Step 3 (+25°C):

DCL: See table I.

ΔCap: Within ±5 percent of step 1 value.

DF: See table I.

Step 4 (+85°C):

DCL: See table I.

ΔCap: See table I.

DF: See table I.

Step 5 (+125°C):

DCL: See table I.

ΔCap: See table I.

DF: See table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:20Z
Check the source to verify that this is the current version before use.

Step 6 (+25°C):

DCL: See table I.

ΔCap: Within ±5 percent of step 1 value.

DF: See table I.

Reverse voltage: As specified in MIL-PRF-39006.

DCL: See table I.

ΔCap: Within tolerance of table I value.

DF: See table I.

Life at 85°C: Method 108 of MIL-STD-202.

2,000 hours (qualification):

DCL: See table I.

ΔCap: Within ± 10 percent of initial measurement.

DF: See table I.

10,000 hours (group B) and extended life:

DCL (85°C): 125 percent (max) of table I value.

DCL (25°C): See table I.

ΔCap: Within +10 percent, -20 percent of initial measurement.

DF: 200 percent (max) of table I value.

DWV: 2,000 V dc, minimum.

IR.: 100 megohms, minimum.

AC ripple life at 85°C (qualification and group C):

Test ripple current: See table I.

Test voltage: 66.67 percent of rated voltage (see table I).

DCL: See table I.

ΔCap: Within ±10 percent of initial measurement.

DF: See table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:20Z
Check the source to verify that this is the current version before use.

Life at 125°C: Method 108 of MIL-STD-202.

DCL: See table I.

ΔCap: Within ± 10 percent of initial measurement.

DF: See table I.

DWV: 2,000 V dc, minimum.

IR.: 100 megohms, minimum.

2,000 hours (group C):

DCL (125°C): 125 percent (max) of table I value.

DCL (25°C): See table I.

ΔCap: Within +10 percent, -20 percent of initial measurement.

DF: 200 percent (max) of table I value.

DWV: 2,000 V dc, minimum.

IR.: 100 megohms, minimum.

Barometric pressure: Method 105 of MIL-STD-202, condition E (150,000 feet) (45,720.1 m).

Test voltage: Rated voltage.

* Resistance to soldering heat: Method 210 of MIL-STD-202, condition C.

DCL: See table I.

ΔCap: Within ±5 percent of initial measurement.

DF: See table I.

Marking: In accordance with MIL-PRF-39006, with the following exception: The manufacturer may mark the T1 case size "H" designated capacitors as follows:

Polarity of all parts: Series of (+) symbols encircling positive end (see figure 1).

Example: M39006/
31H0001
JAN TM
12345
9415A

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:20Z
Check the source to verify that this is the current version before use.

Voltage groups (85°C rated voltage):

I - - - - - - - - - - 6 V through 15 V

II - - - - - - - - - - 25 V through 75 V.

III - - - - - - - - - - 100 V and 125 V.

* Substitution of H designated parts for non H designated parts: The acquiring activity may substitute an H designated part in place of a non H designated part at their option.

* CHANGES FROM PREVIOUS ISSUE: The margins of this specification are marked with asterisks to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

* Referenced documents. In addition to MIL-PRF-39006, this document also references MIL-PRF-39006/25, MIL-STD-202, MIL-STD-810 and MIL-STD-1276.

Custodians:
Army - CR
Navy - EC
Air Force – 11
DLA - CC

Preparing activity:
DLA - CC

(Project 5910-2005-023)

Review activities:
Navy - AS, MC, OS
Air Force - 19

* NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil/

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:20Z
Check the source to verify that this is the current version before use.