
INCH-POUND
MIL-PRF-39006/33A
01 June 2012
SUPERSEDING
MIL-PRF-39006/33
29 January 2010

PERFORMANCE SPECIFICATION SHEET

CAPACITORS, FIXED, ELECTROLYTIC (NONSOLID ELECTROLYTE), TANTALUM, (POLARIZED, SINTERED SLUG), (EXTENDED RANGE), 85°C (VOLTAGE DERATED TO 125°C), ESTABLISHED RELIABILITY, STYLE CLR93

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-PRF-39006.

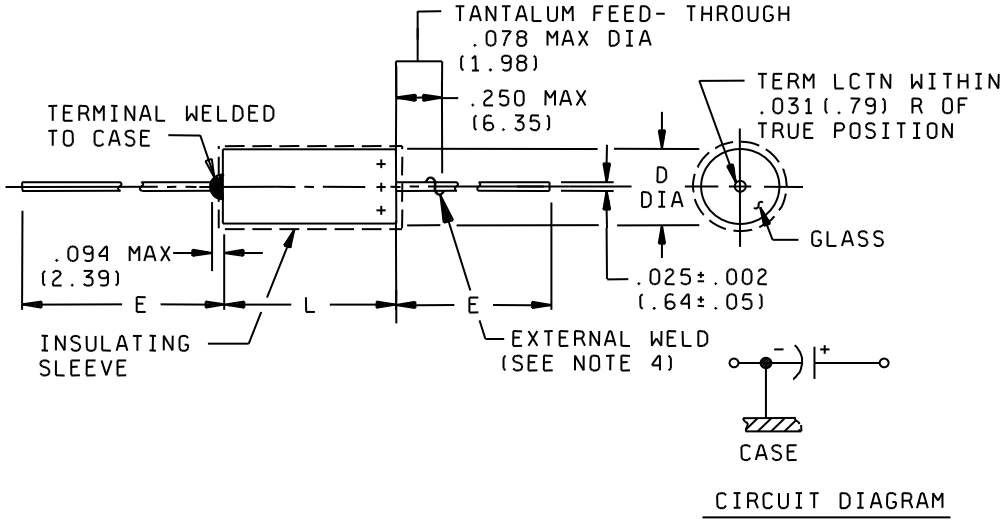

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are in parentheses.
3. Metric equivalents are given for general information only.
4. The weld shall not be enclosed in the end seal.

FIGURE 1. Style CLR93 capacitors.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:21Z
Check the source to verify that this is the current version before use.

Case Size 2/	Dimensions			
	Basic case		Insulated case	
	L 1/ +.031 (0.79) -.016 (0.41)	D ±.016 (0.41)	D max	E ±.250 (6.35)
T1	.453 (11.51)	.188 (4.78)	.219 (5.56)	1.500 (38.10)
T2	.641 (16.28)	.281 (7.14)	.312 (7.92)	2.250 (57.15)
T3	.766 (19.46)	.375 (9.52)	.406 (10.31)	2.250 (57.15)
T4	1.062 (26.97)	.375 (9.52)	.406 (10.31)	2.250 (57.15)
L2	1.008 (25.60)	.281 (7.14)	.312 (7.92)	2.250 (57.15)

1/ Length of basic case sleeving shall be as specified in MIL-PRF-39006.
2/ Dimensions are in inches, millimeters are in parentheses.

FIGURE 1. Style CLR93 capacitors - Continued.

REQUIREMENTS:

Design and construction:

Dimensions and configuration: See figure 1.

Case type: Tantalum, tubular, insulated.

Seal type: Hermetic (glass-to-tantalum anode).

Terminals: Axial-wire lead: Cathode and anode (type N32, N51, or N52 of MIL-STD-1276).

Rated temperature: -55°C to +85°C, voltage de-rated to +125°C (see figure 2).

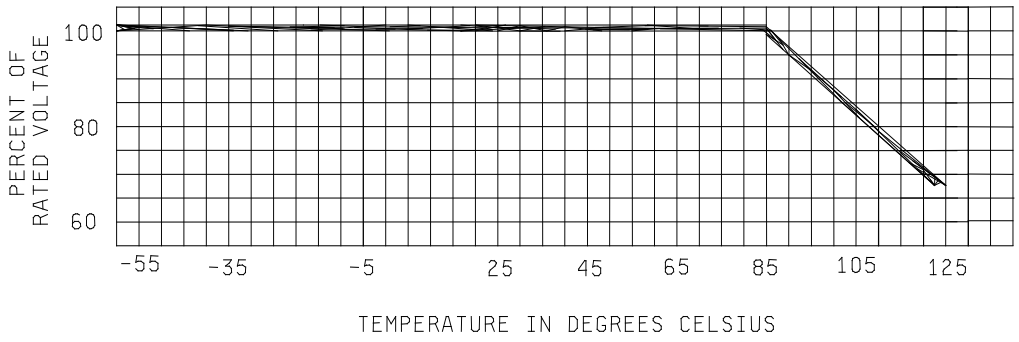


FIGURE 2. Voltage derating with temperature.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:21Z
Check the source to verify that this is the current version before use.

Rated voltage: See table I.

Capacitance (Cap.) nominal (nom): See table I.

Cap. tolerance: ±10 percent or ±20 percent (see table I).

FR level: M, P, R, and S (see table I).

DC leakage (DCL) (max) (at +25°C): See table I.

Equivalent Series Resistance (ESR) (max): See table I.

Cap. (nominal): Method 305 of MIL-STD-202.

Seal: Method 112 of MIL-STD-202, conditions A or D, and C.

Shock (specified pulse): Method 213 of MIL-STD-202, condition I (100 g's).

Vibration, high frequency: Method 204 of MIL-STD-202, condition D (20 g's).

Random vibration (not applicable).

Thermal shock: Method 107 of MIL-STD-202, condition A (with step 3 at +125°C).

Number of cycles: In accordance with MIL-PRF-39006, the following shall apply:

DCL: 200 percent (max) of +25°C value of table I for qualification and group C.

DCL: 125 percent (max) of +25°C value of table I for group B.

ΔCap: Within ±5 percent of initial measurement.

ESR: 115 percent (max) of initial requirement.

Salt atmosphere (corrosion): Method 101 of MIL-STD-202, condition B (48 hours).

Solderability: Method 208 of MIL-STD-202.

Terminal strength:

Pull: Method 211 of MIL-STD-202, condition A.

Wire-lead bend: In accordance with MIL-PRF-39006.

Surge voltage: See table I.

Moisture resistance: Method 106 of MIL-STD-202.

DCL: 125 percent (max) of +25°C value of table I.

ΔCap: Within ±8 percent of initial measurement.

ESR: 115 percent (max) of initial requirement.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:21Z
Check the source to verify that this is the current version before use.

TABLE I. Capacitor characteristics

Rated voltage (+85°C) 1/	Cap.	Cap. tolerance	DC leakage (max)		Dissipation factor (max) 2/	ESR at +25°C (max)	Derated voltage (+125°C) 1/	Surge voltage (+85°C)	Impedance (max)	Capacitance change at			Max +85°C 40 kHz ripple current 3/	Case size	PIN M39006/33-			
			+25°C	+85°C, +125°C						-55°C	+85°C	+125°C			Failure rate level (%/1,000 hour)			
															M(1.0)	P(0.1)	R(0.01)	S(0.001)
V dc	µF	percent	µA	µA	percent	Ohms	V dc	V dc	Ohms	percent	percent	percent	mA rms					
25	120	+20	1	5	14.1	1.3	15	28.8	25	-42	8	12	1250	T1	0001	1001	2001	3001
25	120	+10	1	5	14.1	1.3	15	28.8	25	-42	8	12	1250	T1	0002	1002	2002	3002
25	560	+20	2	10	42.1	0.83	15	28.8	12	-65	10	15	2100	T2	0003	1003	2003	3003
25	560	+10	2	10	42.1	0.83	15	28.8	12	-65	10	15	2100	T2	0004	1004	2004	3004
25	1100	+20	3	25	49.8	0.5	15	28.8	7	-60	20	45	3200	L2	0005	1005	2005	3005
25	1100	+10	3	25	49.8	0.5	15	28.8	7	-60	20	45	3200	L2	0006	1006	2006	3006
25	1200	+20	5	20	70.6	0.65	15	28.8	7	-70	12	18	2600	T3	0007	1007	2007	3007
25	1200	+10	5	20	70.6	0.65	15	28.8	7	-70	12	18	2600	T3	0008	1008	2008	3008
25	1800	+20	6	25	81.4	0.5	15	28.8	7	-75	12	20	3100	T4	0009	1009	2009	3009
25	1800	+10	6	25	81.4	0.5	15	28.8	7	-75	12	20	3100	T4	0010	1010	2010	3010
30	100	+20	1	5	11.8	1.3	20	34.5	25	-38	8	12	1200	T1	0011	1011	2011	3011
30	100	+10	1	5	11.8	1.3	20	34.5	25	-38	8	12	1200	T1	0012	1012	2012	3012
30	470	+20	2	10	36.1	0.85	20	34.5	15	-65	10	18	1800	T2	0013	1013	2013	3013
30	470	+10	2	10	36.1	0.85	20	34.5	15	-65	10	18	1800	T2	0014	1014	2014	3014
30	950	+20	5	30	43.0	0.5	20	34.5	7	-55	18	35	3200	L2	0015	1015	2015	3015
30	950	+10	5	30	43.0	0.5	20	34.5	7	-55	18	35	3200	L2	0016	1016	2016	3016
30	1000	+20	7	25	63.3	0.7	20	34.5	7	-70	10	18	2500	T3	0017	1017	2017	3017
30	1000	+10	7	25	63.3	0.7	20	34.5	7	-70	10	18	2500	T3	0018	1018	2018	3018
30	1500	+20	12	35	81.4	0.6	20	34.5	6	-72	10	20	3000	T4	0019	1019	2019	3019
30	1500	+10	12	35	81.4	0.6	20	34.5	6	-72	10	20	3000	T4	0020	1020	2020	3020
50	68	+20	1	5	9.2	1.5	30	57.5	35	-25	8	15	1050	T1	0021	1021	2021	3021
50	68	+10	1	5	9.2	1.5	30	57.5	35	-25	8	15	1050	T1	0022	1022	2022	3022
50	220	+20	2	10	17.9	0.9	30	57.5	17.5	-50	8	15	1800	T2	0023	1023	2023	3023
50	220	+10	2	10	17.9	0.9	30	57.5	17.5	-50	8	15	1800	T2	0024	1024	2024	3024
50	450	+20	3	25	24.4	0.6	30	57.5	7.5	-45	12	30	2900	L2	0025	1025	2025	3025
50	450	+10	3	25	24.4	0.6	30	57.5	7.5	-45	12	30	2900	L2	0026	1026	2026	3026
50	470	+20	3	25	31.9	0.75	30	57.5	10	-50	8	15	2100	T3	0027	1027	2027	3027
50	470	+10	3	25	31.9	0.75	30	57.5	10	-50	8	15	2100	T3	0028	1028	2028	3028
50	680	+20	5	40	43.1	0.7	30	57.5	10	-58	10	20	2750	T4	0029	1029	2029	3029
50	680	+10	5	40	43.1	0.7	30	57.5	10	-58	10	20	2750	T4	0030	1030	2030	3030

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:21Z
Check the source to verify that this is the current version before use.

TABLE I. Capacitor characteristics - Continued.

Rated voltage (+85°C) 1/	Cap.	Cap. tolerance	DC leakage (max)		Dissipation factor (max) 2/	ESR at +25°C (max)	Derated voltage (+125°C) 1/	Surge voltage (+85°C)	Impedance (max)	Capacitance change at			Max +85°C 40 kHz ripple current 3/	Case size	PIN M39006/33-			
			+25°C	+85°C, +125°C						-55°C	+85°C	+125°C			Failure rate level (%/1,000 hour)			
															M(1.0)	P(0.1)	R(0.01)	S(0.001)
V dc	µF	percent	µA	µA	percent	Ohms	V dc	V dc	Ohms	percent	percent	percent	mA rms					
60	47	+20	1	5	8.5	2	40	69	44	-25	8	12	1050	T1	0031	1031	2031	3031
60	47	+10	1	5	8.5	2	40	69	44	-25	8	12	1050	T1	0032	1032	2032	3032
60	150	+20	2	10	14.9	1.1	40	69	20	-40	8	15	1650	T2	0033	1033	2033	3033
60	150	+10	2	10	14.9	1.1	40	69	20	-40	8	15	1650	T2	0034	1034	2034	3034
60	370	+20	3	25	20.1	0.6	40	69	9	-33	9	20	2900	L2	0035	1035	2035	3035
60	370	+10	3	25	20.1	0.6	40	69	9	-33	9	20	2900	L2	0036	1036	2036	3036
60	390	+20	3	25	31.8	0.9	40	69	15	-60	8	15	2100	T3	0037	1037	2037	3037
60	390	+10	3	25	31.8	0.9	40	69	15	-60	8	15	2100	T3	0038	1038	2038	3038
60	560	+20	5	40	40.5	0.8	40	69	10	-58	8	15	2750	T4	0039	1039	2039	3039
60	560	+10	5	40	40.5	0.8	40	69	10	-58	8	15	2750	T4	0040	1040	2040	3040
75	33	+20	1	5	7.5	2.5	50	86.2	66	-25	5	9	1050	T1	0041	1041	2041	3041
75	33	+10	1	5	7.5	2.5	50	86.2	66	-25	5	9	1050	T1	0042	1042	2042	3042
75	110	+20	2	10	12.9	1.3	50	86.2	24	-35	6	10	1650	T2	0043	1043	2043	3043
75	110	+10	2	10	12.9	1.3	50	86.2	24	-35	6	10	1650	T2	0044	1044	2044	3044
75	250	+20	5	30	18.1	0.8	50	86.2	12	-30	6	15	2500	L2	0045	1045	2045	3045
75	250	+10	5	30	18.1	0.8	50	86.2	12	-30	6	15	2500	L2	0046	1046	2046	3046
75	330	+20	3	30	29.9	1	50	86.2	12	-45	6	10	2100	T3	0047	1047	2047	3047
75	330	+10	3	30	29.9	1	50	86.2	12	-45	6	10	2100	T3	0048	1048	2048	3048
75	470	+20	5	50	38.3	0.9	50	86.2	12	-55	8	12	2750	T4	0049	1049	2049	3049
75	470	+10	5	50	38.3	0.9	50	86.2	12	-55	8	12	2750	T4	0050	1050	2050	3050
100	15	+20	1	5	4.8	3.5	65	115	125	-18	3	10	1050	T1	0051	1051	2051	3051
100	15	+10	1	5	4.8	3.5	65	115	125	-18	3	10	1050	T1	0052	1052	2052	3052
100	68	+20	2	10	12.9	2.1	65	115	37	-30	4	12	1650	T2	0053	1053	2053	3053
100	68	+10	2	10	12.9	2.1	65	115	37	-30	4	12	1650	T2	0054	1054	2054	3054
100	120	+20	3	25	10.9	1	65	115	20.5	-30	4	12	2200	L2	0055	1055	2055	3055
100	120	+10	3	25	10.9	1	65	115	20.5	-30	4	12	2200	L2	0056	1056	2056	3056
100	150	+20	3	25	21.7	1.6	65	115	22	-35	6	12	2100	T3	0057	1057	2057	3057
100	150	+10	3	25	21.7	1.6	65	115	22	-35	6	12	2100	T3	0058	1058	2058	3058
100	220	+20	5	50	23.9	1.2	65	115	15	-40	6	12	2750	T4	0059	1059	2059	3059
100	220	+10	5	50	23.9	1.2	65	115	15	-40	6	12	2750	T4	0060	1060	2060	3060

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:21Z
Check the source to verify that this is the current version before use.

TABLE I. Capacitor characteristics - Continued.

Rated voltage (+85°C) 1/	Cap.	Cap. tolerance	DC leakage (max)		Dissipation factor (max) 2/	ESR at +25°C (max)	Derated voltage (+125°C) 1/	Surge voltage (+85°C)	Impedance (max)	Capacitance change at			Max +85°C 40 kHz ripple current 3/	Case size	PIN M39006/33-			
			+25°C	+85°C, +125°C						-55°C	+85°C	+125°C			Failure rate level (%/1,000 hour)			
V dc	µF	percent	µA	µA	percent	Ohms	V dc	V dc	Ohms	percent	percent	percent	mA rms		M(1.0)	P(0.1)	R(0.01)	S(0.001)
125	10	+20	1	5	5.0	5.5	85	144	175	-15	3	10	1050	T1	0061	1061	2061	3061
125	10	+10	1	5	5.0	5.5	85	144	175	-15	3	10	1050	T1	0062	1062	2062	3062
125	47	+20	2	10	9.8	2.3	85	144	47	-25	5	12	1650	T2	0063	1063	2063	3063
125	47	+10	2	10	9.8	2.3	85	144	47	-25	5	12	1650	T2	0064	1064	2064	3064
125	90	+20	5	25	10.6	1.3	85	144	25	-22	4	15	2000	L2	0065	1065	2065	3065
125	90	+10	5	25	10.6	1.3	85	144	25	-22	4	15	2000	L2	0066	1066	2066	3066
125	100	+20	3	25	16.3	1.8	85	144	35	-35	5	12	2100	T3	0067	1067	2067	3067
125	100	+10	3	25	16.3	1.8	85	144	35	-35	5	12	2100	T3	0068	1068	2068	3068
125	150	+20	5	50	21.7	1.6	85	144	20	-40	6	12	2750	T4	0069	1069	2069	3069
125	150	+10	5	50	21.7	1.6	85	144	20	-40	6	12	2750	T4	0070	1070	2070	3070

1/ Reverse voltage: There shall be no continuous reverse voltage. Transient reverse voltage surges are acceptable under the following conditions:

a. The peak reverse voltage is equal to or less than 1.5 volts and the product of the peak current times the duration of the reverse transient is 0.05 ampere-seconds or less.
b. The repetition rate of the reverse voltage surges is less than 10 Hz.

2/ DF is calculated from ESR and is for reference only, calculated by the equation:

$DF=(ESR_{max})(2\pi)(f)(C)$ where:

ESR = actual measured ESR
2π = 6.28
f = 120 Hz
C = Actual measured capacitance.

3/ For ripple current limits at various temperatures, voltages, and frequencies, see table II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:21Z
Check the source to verify that this is the current version before use.

TABLE II. Ripple current multipliers versus frequency, temperature, and applied peak voltage. 1/ 2/ 3/ 4/ 5/

Frequency of applied ripple current		120 Hz				800 Hz				1 kHz				10 kHz				40 kHz				100 kHz			
		Temp °C				Temp °C				Temp °C				Temp °C				Temp °C				Temp °C			
	Ambient still air	≤+55°	+85°	+105°	+125°	≤+55°	+85°	+105°	+125°	≤+55°	+85°	+105°	+125°	≤+55°	+85°	+105°	+125°	≤+55°	+85°	+105°	+125°	≤+55°	+85°	+105°	+125°
	100 percent	.60	.39	---	---	.71	.43	---	---	.72	.45	---	---	.88	.55	---	---	1.0	.63	---	---	1.1	.69	---	---
	90 percent	.60	.46	---	---	.71	.55	---	---	.72	.55	---	---	.88	.67	---	---	1.0	.77	---	---	1.1	.85	---	---
6/	80 percent	.60	.52	.35	---	.71	.62	.42	---	.72	.62	.42	---	.88	.76	.52	---	1.0	.87	.59	---	1.1	.96	.65	---
	70 percent	.60	.58	.44	---	.71	.69	.52	---	.72	.70	.52	---	.88	.85	.64	---	1.0	.97	.73	---	1.1	1.07	.80	---
	≤ 66 2/3 percent	.60	.60	.46	.27	.71	.71	.55	.32	.72	.72	.55	.32	.88	.88	.68	.40	1.0	1.0	.77	.45	1.1	1.1	.85	.50

1/ At +125°C, the rated voltage of the capacitors decreases to 66.67 percent of the +85°C rated voltage.
2/ The peak of the applied ac ripple voltage plus the applied dc voltage must not exceed the dc voltage rating of the capacitor either forward or reverse.
3/ The ripple current listed in table I represents a rating calculated by using a maximum internal temperature rise (ΔT) at +50°C at 40 kHz and at +85°C ambient temperature, with a maximum peak rated voltage of 66.67 percent of the +85°C peak voltage rating.
4/ The maximum allowable internal temperature rise (ΔT) decreases linearly to a calculated 10°C rise at +125°C ambient.
5/ The internal temperature rise is directly proportional to the ESR of the capacitor, and ESR increases with decreasing frequency.
6/ Percentage of +85°C rated peak voltage.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:21Z
Check the source to verify that this is the current version before use.

Dielectric withstanding voltage (DWV): Method 301 of MIL-STD-202. 2,000 V dc, minimum.

Insulation resistance (IR): Method 302 of MIL-STD-202, condition B. 100 megohms, minimum.

Low temperature (storage): Method 502 of MIL-STD-810.

DCL: See table I.

ΔCap: Within ±5 percent of initial measurement.

ESR: See table I.

Stability at low and high temperatures:

Step 1 (+25°C):

DCL: See table I.

ΔCap: Within tolerance of table I value.

ESR: See table I.

Step 2 (-55°C):

Impedance. See table I.

ΔCap: See table I.

Step 3 (+25°C):

DCL: See table I.

ΔCap: Within ±5 percent of step 1 value.

ESR: See table I.

Step 4 (+85°C):

DCL: See table I.

ΔCap: See table I.

ESR: See table I.

Step 5 (+125°C):

DCL: See table I.

ΔCap: See table I.

ESR: See table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:21Z
Check the source to verify that this is the current version before use.

Step 6 (+25°C):

DCL: See table I.

ΔCap: Within ±5 percent of step 1 value.

ESR: See table I.

Reverse voltage: Not applicable.

Life at +85°C: Method 108 of MIL-STD-202.

2,000 hours (qualification):

DCL: See table I.

ΔCap: Within ± 10 percent of initial measurement.

ESR: See table I.

10,000 hours (group B) and extended life:

DCL (+85°C): 125 percent (max) of table I value.

DCL (+25°C): See table I.

ΔCap: Within +10 percent, -20 percent of initial measurement.

ESR: 200 percent (max) of table I value.

DWV: 2,000 V dc, minimum.

IR.: 100 megohms, minimum.

AC ripple life at +85°C (qualification and group C):

Test ripple current: See table I.

Test voltage: 66.67 percent of rated voltage (see table I).

DCL: See table I.

ΔCap: Within ±10 percent of initial measurement.

ESR: See table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:21Z
Check the source to verify that this is the current version before use.

Life at +125°C: Method 108 of MIL-STD-202.

DCL: See table I.

ΔCap: Within ± 10 percent of initial measurement.

ESR: See table I.

DWV: 2,000 V dc, minimum.

IR.: 100 megohms, minimum.

2,000 hours (group C):

DCL (+125°C): 125 percent (max) of table I value.

DCL (+25°C): See table I.

ΔCap: Within +10 percent, -20 percent of initial measurement.

ESR: 200 percent (max) of table I value.

DWV: 2,000 V dc, minimum.

IR.: 100 megohms, minimum.

Barometric pressure: Method 105 of MIL-STD-202, condition E (150,000 feet) (45,720.1 m).

Test voltage: Rated voltage.

Resistance to soldering heat: Method 210 of MIL-STD-202, condition C.

DCL: See table I.

ΔCap: Within ±5 percent of initial measurement.

ESR: See table I.

Marking: In accordance with MIL-PRF-39006.

Polarity of all parts: Series of (+) symbols encircling positive end (see figure 1).

Example: M39006/
33-0001
JAN TM
12345
9415A

Voltage groups (+85°C rated voltage):

I ---------- 6 V through 15 V

II ---------- 25 V through 75 V.

III ---------- 100 V and 125 V.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:21Z
Check the source to verify that this is the current version before use.

Changes from previous issue. The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Referenced documents. In addition to MIL-PRF-39006, this document references the following:

MIL-STD-202
MIL-STD-810
MIL-STD-1276
DLA Land and Maritime Drawing 93026

TABLE III Substitutability data to replace DLA Land and Maritime drawing 93026.

Rated Voltage at (+55°C) Vdc	Cap (uF) at +25°C and 120 Hz	Cap tolerance	DSCC Drawing PIN 93026-	PIN M39006/33-			
				Failure rate level (%/1000 hour)			
				M (1.0)	P (0.1)	R (0.01)	S (0.001)
25	120	±20%	29MS	0001	1001	2001	3001
25	120	±10%	29KS	0002	1002	2002	3002
25	560	±20%	30MS	0003	1003	2003	3003
25	560	±10%	30KS	0004	1004	2004	3004
25	1100	±20%	57MS	0005	1005	2005	3005
25	1100	±10%	57KS	0006	1006	2006	3006
25	1200	±20%	31MS	0007	1007	2007	3007
25	1200	±10%	31KS	0008	1008	2008	3008
25	1800	±20%	32MS	0009	1009	2009	3009
25	1800	±10%	32KS	0010	1010	2010	3010
30	100	±20%	33MS	0011	1011	2011	3011
30	100	±10%	33KS	0012	1012	2012	3012
30	470	±20%	34MS	0013	1013	2013	3013
30	470	±10%	34KS	0014	1014	2014	3014
30	950	±20%	58MS	0015	1015	2015	3015
30	950	±10%	58KS	0016	1016	2016	3016
30	1000	±20%	35MS	0017	1017	2017	3017
30	1000	±10%	35KS	0018	1018	2018	3018
30	1500	±20%	36MS	0019	1019	2019	3019
30	1500	±10%	36KS	0020	1020	2020	3020
50	68	±20%	37MS	0021	1021	2021	3021
50	68	±10%	37KS	0022	1022	2022	3022
50	220	±20%	38MS	0023	1023	2023	3023
50	220	±10%	38KS	0024	1024	2024	3024
50	450	±20%	59MS	0025	1025	2025	3025
50	450	±10%	59KS	0026	1026	2026	3026
50	470	±20%	39MS	0027	1027	2027	3027
50	470	±10%	39KS	0028	1028	2028	3028
50	680	±20%	40MS	0029	1029	2029	3029
50	680	±10%	40KS	0030	1030	2030	3030
60	47	±20%	41MS	0031	1031	2031	3031
60	47	±10%	41KS	0032	1032	2032	3032
60	150	±20%	42MS	0033	1033	2033	3033
60	150	±10%	42KS	0034	1034	2034	3034
60	370	±20%	60MS	0035	1035	2035	3035
60	370	±10%	60KS	0036	1036	2036	3036

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:21Z
Check the source to verify that this is the current version before use.

TABLE III Substitutability data to replace DLA Land and Maritime drawing 93026. Continued.

Rated Voltage at (+55°C) Vdc	Cap (uF) at +25°C and 120 Hz	Cap tolerance	DSCC Drawing PIN 93026-	PIN M39006/33-			
				Failure rate level (%/1000 hour)			
				M (1.0)	P (0.1)	R (0.01)	S (0.001)
60	390	±20%	43MS	0037	1037	2037	3037
60	390	±10%	43KS	0038	1038	2038	3038
60	560	±20%	44MS	0039	1039	2039	3039
60	560	±10%	44KS	0040	1040	2040	3040
75	33	±20%	45MS	0041	1041	2041	3041
75	33	±20%	45KS	0042	1042	2042	3042
75	110	±20%	46MS	0043	1043	2043	3043
75	110	±10%	46KS	0044	1044	2044	3044
75	250	±20%	61MS	0045	1045	2045	3045
75	250	±10%	61KS	0046	1046	2046	3046
75	330	±20%	47MS	0047	1047	2047	3047
75	330	±10%	47KS	0048	1048	2048	3048
75	470	±20%	48MS	0049	1049	2049	3049
75	470	±10%	48KS	0050	1050	2050	3050
100	15	±20%	49MS	0051	1051	2051	3051
100	15	±10%	49KS	0052	1052	2052	3052
100	68	±20%	50MS	0053	1053	2053	3053
100	68	±10%	50KS	0054	1054	2054	3054
100	120	±20%	62MS	0055	1055	2055	3055
100	120	±10%	62KS	0056	1056	2056	3056
100	150	±20%	51MS	0057	1057	2057	3057
100	150	±10%	51KS	0058	1058	2058	3058
100	220	±20%	52MS	0059	1059	2059	3059
100	220	±10%	52KS	0060	1060	2060	3060
125	10	±20	53MS	0061	1061	2061	3061
125	10	±10	53KS	0062	1062	2062	3062
125	47	±20	54MS	0063	1063	2063	3063
125	47	±10	54KS	0064	1064	2064	3034
125	90	±20	63MS	0065	1065	2065	3065
125	90	±10	63KS	0066	1066	2066	3066
125	100	±20	55MS	0067	1067	2067	3067
125	100	±10	55KS	0068	1068	2068	3068
125	150	±20	56MS	0069	1069	2069	3069
125	150	±10	56KS	0070	1070	2070	3070

Custodians:
Army - CR
Navy - EC
Air Force – 85
DLA - CC
NASA - NA

Preparing activity:
DLA - CC

(Project 5910-2012-009)

Review activities:
Navy - AS, MC, OS
Air Force - 19

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.daps.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:21Z
Check the source to verify that this is the current version before use.