INCH-POUND

MIL-PRF-39006/9G
2 June 2010
SUPERSEDING
MIL-PRF-39006/9F
9 December 2004

PERFORMANCE SPECIFICATION SHEET

CAPACITORS, FIXED, ELECTROLYTIC (NONSOLID ELECTROLYTE), TANTALUM, (POLARIZED, SINTERED SLUG), 85°C (VOLTAGE DERATED TO 125°C), ESTABLISHED RELIABILITY, STYLE CLR65

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this document and MIL-PRF-39006.

INACTIVE FOR NEW DESIGN AFTER 23 JUNE 1981. FOR NEW DESIGN, USE MIL-PRF-39006/22.

NOTE: The above entry consolidates all previous specification action concerning inactivation. Failure rate level "L" was made inactive for new design on 27 May 1976. All other failure rate levels were inactivated by Notice 1 and 2 dated 9 October 1981 and 11 June 1982, respectively.

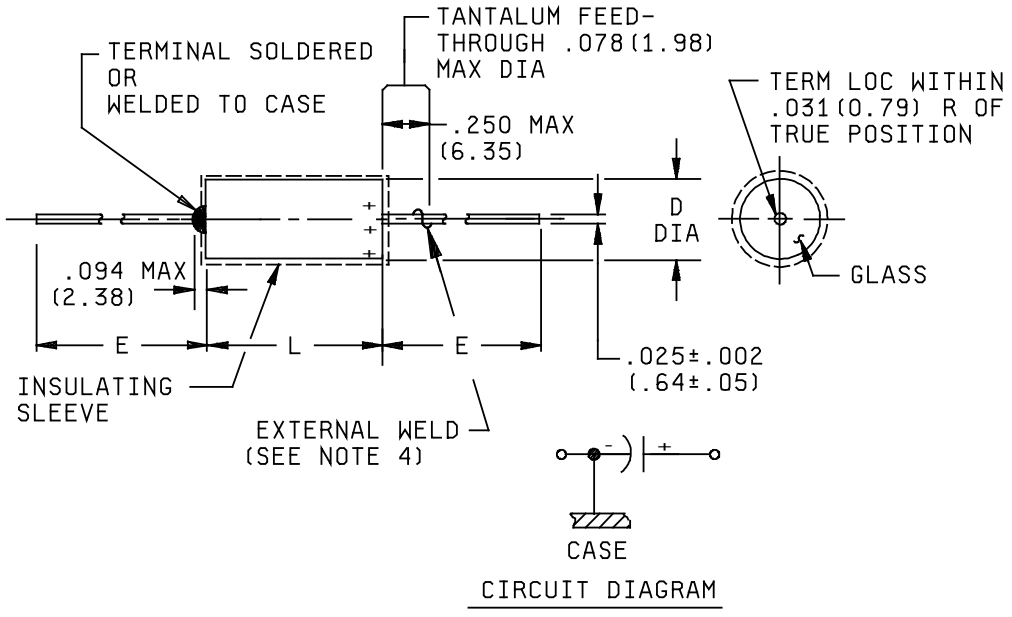


FIGURE 1. Style CLR65 capacitors.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:15Z
Check the source to verify that this is the current version before use.

Case size	Dimensions			
	Basic case		Insulated case	
	L 1/ +.031 (0.79) -.016 (0.41)	D ±.016 (0.41)	D max	E ±.250 (6.35)
T1	.453 (11.51)	.188 (4.78)	.219 (5.56)	1.500 (38.10)
T2	.641 (16.28)	.281 (7.14)	.312 (7.92)	2.250 (57.15)
T3	.766 (19.46)	.375 (9.53)	.406 (10.31)	2.250 (57.15)
T4	1.062 (26.97) 2/	.375 (9.53)	.406 (10.31)	2.250 (57.15)

1/ Length of basic case; sleeving shall be as specified in MIL-PRF-39006.
2/ For the T4 case size only, the negative L dimension tolerance is -.023 (0.58).

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are in parentheses.
3. Metric equivalents (to the nearest 0.01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
4. The weld shall not be enclosed in the end seal.

FIGURE 1. Style CLR65 capacitors - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:15Z
Check the source to verify that this is the current version before use.

TABLE I. Capacitor characteristics.

Rated voltage (+85°C) volts, dc	Cap. 1/ µF	Cap. tolerance percent	DC leakage (max) +25°C µA	DC leakage (max) +85°C & +125°C µA	Dissipation factor (max) percent	Derated voltage (+125°C) volts, dc	Surge voltage (+85°C) volts, dc	Impedance (max) ohms	Capacitance change at -55°C percent	Capacitance change at +85°C percent	Capacitance change at +125°C percent	Case size	PIN M39006/09- Failure rate level (%/1,000 hour) L (2.0)	M (1.0)	P (0.1)	R (0.01)	S (0.001)
6	30	±20	1	2	9.1	4	6.9	100	-40	+10.5	+12	T1	8001	8206	8411	8616	8821
6	30	±10	1	2	9.1	4	6.9	100	-40	+10.5	+12	T1	8002	8207	8412	8617	8822
6	30	±5	1	2	9.1	4	6.9	100	-40	+10.5	+12	T1	8003	8208	8413	8618	8823
6	*68	±20	1	2	20.4	4	6.9	60	-40	+14	+16	T1	8004	8209	8414	8619	8824
6	*68	±10	1	2	20.4	4	6.9	60	-40	+14	+16	T1	8005	8210	8415	8620	8825
6	*68	±5	1	2	20.4	4	6.9	60	-40	+14	+16	T1	8006	8211	8416	8621	8826
6	140	±20	1	3	21.3	4	6.9	40	-40	+14	+16	T2	8007	8212	8417	8622	8827
6	140	±10	1	3	21.3	4	6.9	40	-40	+14	+16	T2	8008	8213	8418	8623	8828
6	140	±5	1	3	21.3	4	6.9	40	-40	+14	+16	T2	8009	8214	8419	8624	8829
6	270	±20	1	6.5	81.8	4	6.9	25	-44	+17.5	+20	T2	8010	8215	8420	8625	8830
6	270	±10	1	6.5	81.8	4	6.9	25	-44	+17.5	+20	T2	8011	8216	8421	8626	8831
6	270	±5	1	6.5	81.8	4	6.9	25	-44	+17.5	+20	T2	8012	8217	8422	8627	8832
6	330	±20	2	7.9	49.6	4	6.9	20	-44	+14	+16	T3	8013	8218	8423	8628	8833
6	330	±10	2	7.9	49.6	4	6.9	20	-44	+14	+16	T3	8014	8219	8424	8629	8834
6	330	±5	2	7.9	49.6	4	6.9	20	-44	+14	+16	T3	8015	8220	8425	8630	8835
6	560	±20	2	13	128.0	4	6.9	25	-64	+17.5	+20	T3	8016	8221	8426	8631	8836
6	560	±10	2	13	128.0	4	6.9	25	-64	+17.5	+20	T3	8017	8222	8427	8632	8837
6	560	±5	2	13	128.0	4	6.9	25	-64	+17.5	+20	T3	8018	8223	8428	8633	8838
6	1200	±20	3	14	144.4	4	6.9	20	-80	+25	+25	T4	8019	8224	8429	8634	8839
6	1200	±10	3	14	144.4	4	6.9	20	-80	+25	+25	T4	8020	8225	8430	8635	8840
8	25	±20	1	2	7.6	5	9.2	100	-40	+10.5	+12	T1	8021	8226	8431	8636	8841
8	25	±10	1	2	7.6	5	9.2	100	-40	+10.5	+12	T1	8022	8227	8432	8637	8842
8	25	±5	1	2	7.6	5	9.2	100	-40	+10.5	+12	T1	8023	8228	8433	8638	8843
8	56	±20	1	2	17.0	5	9.2	59	-40	+14	+16	T1	8024	8229	8434	8639	8844
8	56	±10	1	2	17.0	5	9.2	59	-40	+14	+16	T1	8025	8230	8435	8640	8845
8	56	±5	1	2	17.0	5	9.2	59	-40	+14	+16	T1	8026	8231	8436	8641	8846
8	220	±20	1	7	66.4	5	9.2	30	-44	+17.5	+20	T2	8027	8232	8437	8642	8847
8	220	±10	1	7	66.4	5	9.2	30	-44	+17.5	+20	T2	8028	8233	8438	8643	8848
8	220	±5	1	7	66.4	5	9.2	30	-44	+17.5	+20	T2	8029	8234	8439	8644	8849
8	430	±20	2	14	91.5	5	9.2	25	-64	+17.5	+20	T3	8030	8235	8440	8645	8850
8	430	±10	2	14	91.5	5	9.2	25	-64	+17.5	+20	T3	8031	8236	8441	8646	8851
8	430	±5	2	14	91.5	5	9.2	25	-64	+17.5	+20	T3	8032	8237	8442	8647	8852
8	850	±20	4	16	65.8	5	9.2	22	-80	+25	+25	T4	8033	8238	8443	8648	8853
8	850	±10	4	16	65.8	5	9.2	22	-80	+25	+25	T4	8034	8239	8444	8649	8854
10	20	±20	1	2	6.1	7	11.5	175	-32	+10.5	+12	T1	8035	8240	8445	8650	8855
10	20	±10	1	2	6.1	7	11.5	175	-32	+10.5	+12	T1	8036	8241	8446	8651	8856
10	20	±5	1	2	6.1	7	11.5	175	-32	+10.5	+12	T1	8037	8242	8447	8652	8857

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:15Z
Check the source to verify that this is the current version before use.

TABLE I. Capacitor characteristics - Continued.

Rated voltage (+85°C)	Cap. 1/	Cap. tolerance	DC leakage (max)		Dissipation factor (max)	Derated voltage (+125°C)	Surge voltage (+85°C)	Impedance (max)	Capacitance change at			Case size	PIN M39006/09- Failure rate level (%/1,000 hour)				
			+25°C	+85°C & +125°C					-55°C	+85°C	+125°C		L (2.0)	M (1.0)	P (0.1)	R (0.01)	S (0.001)
volts, dc	µF	percent	µA	µA	percent	volts, dc	volts, dc	ohms	percent	percent	percent						
10	47	±20	1	2	18.1	7	11.5	100	-36	+14	+16	T1	8038	8243	8448	8653	8858
10	47	±10	1	2	18.1	7	11.5	100	-36	+14	+16	T1	8039	8244	8449	8654	8859
10	47	±5	1	2	18.1	7	11.5	100	-36	+14	+16	T1	8040	8245	8450	8655	8860
10	100	±20	1	4	15.2	7	11.5	60	-36	+14	+16	T2	8041	8246	8451	8656	8861
10	100	±10	1	4	15.2	7	11.5	60	-36	+14	+16	T2	8042	8247	8452	8657	8862
10	100	±5	1	4	15.2	7	11.5	60	-36	+14	+16	T2	8043	8248	8453	8658	8863
10	180	±20	1	7	54.4	7	11.5	40	-36	+14	+16	T2	8044	8249	8454	8659	8864
10	180	±10	1	7	54.4	7	11.5	40	-36	+14	+16	T2	8045	8250	8455	8660	8865
10	180	±5	1	7	54.4	7	11.5	40	-36	+14	+16	T2	8046	8251	8456	8661	8866
10	250	±20	2	10	37.8	7	11.5	30	-40	+14	+16	T3	8047	8252	8457	8662	8867
10	250	±10	2	10	37.8	7	11.5	30	-40	+14	+16	T3	8048	8253	8458	8663	8868
10	250	±5	2	10	37.8	7	11.5	30	-40	+14	+16	T3	8049	8254	8459	8664	8869
10	390	±20	2	16	87.6	7	11.5	25	-64	+17.5	+20	T3	8050	8255	8460	8665	8870
10	390	±10	2	16	87.6	7	11.5	25	-64	+17.5	+20	T3	8051	8256	8461	8666	8871
10	390	±5	2	16	87.6	7	11.5	25	-64	+17.5	+20	T3	8052	8257	8462	8667	8872
10	750	±20	4	16	56.5	7	11.5	23	-80	+25	+25	T4	8053	8258	8463	8668	8873
10	750	±10	4	16	56.5	7	11.5	23	-80	+25	+25	T4	8054	8259	8464	8669	8874
15	15	±20	1	2	5.7	10	17.2	155	-24	+10.5	+12	T1	8055	8260	8465	8670	8875
15	15	±10	1	2	5.7	10	17.2	155	-24	+10.5	+12	T1	8056	8261	8466	8671	8876
15	15	±5	1	2	5.7	10	17.2	155	-24	+10.5	+12	T1	8057	8262	8467	8672	8877
15	33	±20	1	2	12.5	10	17.2	90	-28	+14	+16	T1	8058	8263	8468	8673	8878
15	33	±10	1	2	12.5	10	17.2	90	-28	+14	+16	T1	8059	8264	8469	8674	8879
15	33	±5	1	2	12.5	10	17.2	90	-28	+14	+16	T1	8060	8265	8470	8675	8880
15	70	±20	1	4	13.1	10	17.2	75	-28	+14	+16	T2	8061	8266	8471	8676	8881
15	70	±10	1	4	13.1	10	17.2	75	-28	+14	+16	T2	8062	8267	8472	8677	8882
15	70	±5	1	4	13.1	10	17.2	75	-28	+14	+16	T2	8063	8268	8473	8678	8883
15	120	±20	1	7	36.8	10	17.2	50	-28	+17.5	+20	T2	8064	8269	8474	8679	8884
15	120	±10	1	7	36.8	10	17.2	50	-28	+17.5	+20	T2	8065	8270	8475	8680	8885
15	120	±5	1	7	36.8	10	17.2	50	-28	+17.5	+20	T2	8066	8271	8476	8681	8886
15	170	±20	2	10	25.4	10	17.2	35	-32	+14	+16	T3	8067	8272	8477	8682	8887
15	170	±10	2	10	25.4	10	17.2	35	-32	+14	+16	T3	8068	8273	8478	8683	8888
15	170	±5	2	10	25.4	10	17.2	35	-32	+14	+16	T3	8069	8274	8479	8684	8889
15	270	±20	2	16	60.9	10	17.2	30	-56	+17.5	+20	T3	8070	8275	8480	8685	8890
15	270	±10	2	16	60.9	10	17.2	30	-56	+17.5	+20	T3	8071	8276	8481	8686	8891
15	270	±5	2	16	60.9	10	17.2	30	-56	+17.5	+20	T3	8072	8277	8482	8687	8892
15	540	±20	6	24	49.0	10	17.2	23	-80	+25	+25	T4	8073	8278	8483	8688	8893
15	540	±10	6	24	49.0	10	17.2	23	-80	+25	+25	T4	8074	8279	8484	8689	8894

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:15Z
Check the source to verify that this is the current version before use.

TABLE I. Capacitor characteristics - Continued.

Rated voltage (+85°C)	Cap. 1/	Cap. tolerance	DC leakage (max)		Dissipation factor (max)	Derated voltage (+125°C)	Surge voltage (+85°C)	Impedance (max)	Capacitance change at			Case size	PIN M39006/09- Failure rate level (%/1,000 hour)				
			+25°C	+85°C & +125°C					-55°C	+85°C	+125°C		L (2.0)	M (1.0)	P (0.1)	R (0.01)	S (0.001)
volts, dc	µF	percent	µA	µA	percent	volts, dc	volts, dc	ohms	percent	percent	percent						
25	10	±20	1	2	4.6	15	28.8	220	-16	+8	+9	T1	8075	8280	8485	8690	8895
25	10	±10	1	2	4.6	15	28.8	220	-16	+8	+9	T1	8076	8281	8486	8691	8896
25	10	±5	1	2	4.6	15	28.8	220	-16	+8	+9	T1	8077	8282	8487	8692	8897
25	22	±20	1	2	8.3	15	28.8	140	-20	+10.5	+12	T1	8078	8283	8488	8693	8898
25	22	±10	1	2	8.3	15	28.8	140	-20	+10.5	+12	T1	8079	8284	8489	8694	8899
25	22	±5	1	2	8.3	15	28.8	140	-20	+10.5	+12	T1	8080	8285	8490	8695	8900
25	100	±20	1	10	31.4	15	28.8	50	-28	+13	+15	T2	8081	8286	8491	8696	8901
25	100	±10	1	10	31.4	15	28.8	50	-28	+13	+15	T2	8082	8287	8492	8697	8902
25	100	±5	1	10	31.4	15	28.8	50	-28	+13	+15	T2	8083	8288	8493	8698	8903
25	180	±20	2	18	54.3	15	28.8	32	-48	+13	+15	T3	8084	8289	8494	8699	8904
25	180	±10	2	18	54.3	15	28.8	32	-48	+13	+15	T3	8085	8290	8495	8700	8905
25	180	±5	2	18	54.3	15	28.8	32	-48	+13	+15	T3	8086	8291	8496	8701	8906
25	350	±20	7	28	35.0	15	28.8	24	-70	+25	+25	T4	8087	8292	8497	8702	8907
25	350	±10	7	28	35.0	15	28.8	24	-70	+25	+25	T4	8088	8293	8498	8703	8908
30	8	±20	1	2	4.5	20	34.5	275	-16	+8	+12	T1	8089	8294	8499	8704	8909
30	8	±10	1	2	4.5	20	34.5	275	-16	+8	+12	T1	8090	8295	8500	8705	8910
30	8	±5	1	2	4.5	20	34.5	275	-16	+8	+12	T1	8091	8296	8501	8706	8911
30	15	±20	1	2	9.1	20	34.5	175	-20	+10.5	+12	T1	8092	8297	8502	8707	8912
30	15	±10	1	2	9.1	20	34.5	175	-20	+10.5	+12	T1	8093	8298	8503	8708	8913
30	15	±5	1	2	9.1	20	34.5	175	-20	+10.5	+12	T1	8094	8299	8504	8709	8914
30	40	±20	1	5	12.2	20	34.5	65	-24	+10.5	+12	T2	8095	8300	8505	8710	8915
30	40	±10	1	5	12.2	20	34.5	65	-24	+10.5	+12	T2	8096	8301	8506	8711	8916
30	40	±5	1	5	12.2	20	34.5	65	-24	+10.5	+12	T2	8097	8302	8507	8712	8917
30	68	±20	1	8	31.0	20	34.5	60	-24	+13	+15	T2	8098	8303	8508	8713	8918
30	68	±10	1	8	31.0	20	34.5	60	-24	+13	+15	T2	8099	8304	8509	8714	8919
30	68	±5	1	8	31.0	20	34.5	60	-24	+13	+15	T2	8100	8305	8510	8715	8920
30	100	±20	2	12	19.0	20	34.5	40	-28	+10.5	+12	T3	8101	8306	8511	8716	8921
30	100	±10	2	12	19.0	20	34.5	40	-28	+10.5	+12	T3	8102	8307	8512	8717	8922
30	100	±5	2	12	19.0	20	34.5	40	-28	+10.5	+12	T3	8103	8308	8513	8718	8923
30	150	±20	2	18	46.0	20	34.5	35	-48	+13	+15	T3	8104	8309	8514	8719	8924
30	150	±10	2	18	46.0	20	34.5	35	-48	+13	+15	T3	8105	8310	8515	8720	8925
30	150	±5	2	18	46.0	20	34.5	35	-48	+13	+15	T3	8106	8311	8516	8721	8926
30	300	±20	8	32	35.0	20	34.5	25	-60	+25	+25	T4	8107	8312	8517	8722	8927
30	300	±10	8	32	35.0	20	34.5	25	-60	+25	+25	T4	8108	8313	8518	8723	8928
50	5	±20	1	2	3.4	30	57.5	400	-16	+5	+6	T1	8109	8314	8519	8724	8929
50	5	±10	1	2	3.4	30	57.5	400	-16	+5	+6	T1	8110	8315	8520	8725	8930
50	5	±5	1	2	3.4	30	57.5	400	-16	+5	+6	T1	8111	8316	8521	8726	8931

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:15Z
Check the source to verify that this is the current version before use.

TABLE I. Capacitor characteristics - Continued.

Rated voltage (+85°C) volts, dc	Cap. 1/ µF	Cap. tolerance percent	DC leakage (max) +25°C µA	DC leakage (max) +85°C & +125°C µA	Dissipation factor (max) percent	Derated voltage (+125°C) volts, dc	Surge voltage (+85°C) volts, dc	Impedance (max) ohms	Capacitance change at -55°C percent	Capacitance change at +85°C percent	Capacitance change at +125°C percent	Case size	PIN M39006/09- Failure rate level (%/1,000 hour) L (2.0)	M (1.0)	P (0.1)	R (0.01)	S (0.001)
50	10	±20	1	2	6.0	30	57.5	250	-24	+8	+9	T1	8112	8317	8522	8727	8932
50	10	±10	1	2	6.0	30	57.5	250	-24	+8	+9	T1	8113	8318	8523	8728	8933
50	10	±5	1	2	6.0	30	57.5	250	-24	+8	+9	T1	8114	8319	8524	8729	8934
50	25	±20	1	5	11.2	30	57.5	95	-20	+10.5	+12	T2	8115	8320	8525	8730	8935
50	25	±10	1	5	11.2	30	57.5	95	-20	+10.5	+12	T2	8116	8321	8526	8731	8936
50	25	±5	1	5	11.2	30	57.5	95	-20	+10.5	+12	T2	8117	8322	8527	8732	8937
50	47	±20	1	9	21.4	30	57.5	70	-28	+13	+15	T2	8118	8323	8528	8733	8938
50	47	±10	1	9	21.4	30	57.5	70	-28	+13	+15	T2	8119	8324	8529	8734	8939
50	47	±5	1	9	21.4	30	57.5	70	-28	+13	+15	T2	8120	8325	8530	8735	8940
50	60	±20	2	12	13.6	30	57.5	45	-16	+10.5	+12	T3	8121	8326	8531	8736	8941
50	60	±10	2	12	13.6	30	57.5	45	-16	+10.5	+12	T3	8122	8327	8532	8737	8942
50	60	±5	2	12	13.6	30	57.5	45	-16	+10.5	+12	T3	8123	8328	8533	8738	8943
50	82	±20	2	16	24.9	30	57.5	45	-32	+13	+15	T3	8124	8329	8534	8739	8944
50	82	±10	2	16	24.9	30	57.5	45	-32	+13	+15	T3	8125	8330	8535	8740	8945
50	82	±5	2	16	24.9	30	57.5	45	-32	+13	+15	T3	8126	8331	8536	8741	8946
50	160	±20	8	32	25.7	30	57.5	27	-50	+25	+25	T4	8127	8332	8537	8742	8947
50	160	±10	8	32	25.7	30	57.5	27	-50	+25	+25	T4	8128	8333	8538	8743	8948
60	4	±20	1	2	3.0	40	69.0	550	-16	+5	+6	T1	8129	8334	8539	8744	8949
60	4	±10	1	2	3.0	40	69.0	550	-16	+5	+6	T1	8130	8335	8540	8745	8950
60	4	±5	1	2	3.0	40	69.0	550	-16	+5	+6	T1	8131	8336	8541	8746	8951
60	8.2	±20	1	2	5.0	40	69.0	275	-24	+8	+9	T1	8132	8337	8542	8747	8952
60	8.2	±10	1	2	5.0	40	69.0	275	-24	+8	+9	T1	8133	8338	8543	8748	8953
60	8.2	±5	1	2	5.0	40	69.0	275	-24	+8	+9	T1	8134	8339	8544	8749	8954
60	20	±20	1	5	7.6	40	69.0	105	-16	+10.5	+12	T2	8135	8340	8545	8750	8955
60	20	±10	1	5	7.6	40	69.0	105	-16	+10.5	+12	T2	8136	8341	8546	8751	8956
60	20	±5	1	5	7.6	40	69.0	105	-16	+10.5	+12	T2	8137	8342	8547	8752	8957
60	39	±20	1	9	20.7	40	69.0	90	-28	+10.5	+12	T2	8138	8343	8548	8753	8958
60	39	±10	1	9	20.7	40	69.0	90	-28	+10.5	+12	T2	8139	8344	8549	8754	8959
60	39	±5	1	9	20.7	40	69.0	90	-28	+10.5	+12	T2	8140	8345	8550	8755	8960
60	50	±20	2	12	15.3	40	69.0	50	-16	+10.5	+12	T3	8141	8346	8551	8756	8961
60	50	±10	2	12	15.3	40	69.0	50	-16	+10.5	+12	T3	8142	8347	8552	8757	8962
60	50	±5	2	12	15.3	40	69.0	50	-16	+10.5	+12	T3	8143	8348	8553	8758	8963
60	68	±20	2	16	30.7	40	69.0	50	-32	+10.5	+12	T3	8144	8349	8554	8759	8964
60	68	±10	2	16	30.7	40	69.0	50	-32	+10.5	+12	T3	8145	8350	8555	8760	8965
60	68	±5	2	16	30.7	40	69.0	50	-32	+10.5	+12	T3	8146	8351	8556	8761	8966
60	140	±20	8	32	25.7	40	69.0	28	-40	+20	+20	T4	8147	8352	8557	8762	8967
60	140	±10	8	32	25.7	40	69.0	28	-40	+20	+20	T4	8148	8353	8558	8763	8968

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:15Z
Check the source to verify that this is the current version before use.

TABLE I. Capacitor characteristics - Continued.

Rated voltage (+85°C) volts, dc	Cap. 1/ µF	Cap. tolerance percent	DC leakage (max) +25°C µA	DC leakage (max) +85°C & +125°C µA	Dissipation factor (max) percent	Derated voltage (+125°C) volts, dc	Surge voltage (+85°C) volts, dc	Impedance (max) ohms	Capacitance change at -55°C percent	Capacitance change at +85°C percent	Capacitance change at +125°C percent	Case size	PIN M39006/09- Failure rate level (%/1,000 hour) L (2.0)	M (1.0)	P (0.1)	R (0.01)	S (0.001)
75	3.5	±20	1	2	2.5	50	86.2	650	-16	+5	+6	T1	8149	8354	8559	8764	8969
75	3.5	±10	1	2	2.5	50	86.2	650	-16	+5	+6	T1	8150	8355	8560	8765	8970
75	3.5	±5	1	2	2.5	50	86.2	650	-16	+5	+6	T1	8151	8356	8561	8766	8971
75	6.8	±20	1	2	4.1	50	86.2	300	-20	+8	+9	T1	8152	8357	8562	8767	8972
75	6.8	±10	1	2	4.1	50	86.2	300	-20	+8	+9	T1	8153	8358	8563	8768	8973
75	6.8	±5	1	2	4.1	50	86.2	300	-20	+8	+9	T1	8154	8359	8564	8769	8974
75	15	±20	1	5	7.5	50	86.2	150	-16	+8	+9	T2	8155	8360	8565	8770	8975
75	15	±10	1	5	7.5	50	86.2	150	-16	+8	+9	T2	8156	8361	8566	8771	8976
75	15	±5	1	5	7.5	50	86.2	150	-16	+8	+9	T2	8157	8362	8567	8772	8977
75	33	±20	1	10	17.5	50	86.2	90	-24	+10.5	+15	T2	8158	8363	8568	8773	8978
75	33	±10	1	10	17.5	50	86.2	90	-24	+10.5	+15	T2	8159	8364	8569	8774	8979
75	33	±5	1	10	17.5	50	86.2	90	-24	+10.5	+15	T2	8160	8365	8570	8775	8980
75	40	±20	2	12	15.2	50	86.2	60	-16	+10.5	+12	T3	8161	8366	8571	8776	8981
75	40	±10	2	12	15.2	50	86.2	60	-16	+10.5	+12	T3	8162	8367	8572	8777	8982
75	40	±5	2	12	15.2	50	86.2	60	-16	+10.5	+12	T3	8163	8368	8573	8778	8983
75	56	±20	2	17	26.0	50	86.2	60	-28	+10.5	+15	T3	8164	8369	8574	8779	8984
75	56	±10	2	17	26.0	50	86.2	60	-28	+10.5	+15	T3	8165	8370	8575	8780	8985
75	56	±5	2	17	26.0	50	86.2	60	-28	+10.5	+15	T3	8166	8371	8576	8781	8986
75	110	±20	9	36	25.7	50	86.2	29	-35	+20	+20	T4	8167	8372	8577	8782	8987
75	110	±10	9	36	25.7	50	86.2	29	-35	+20	+20	T4	8168	8373	8578	8783	8988
100	2.5	±20	1	2	5.0	65	115	950	-16	+7	+8	T1	8169	8374	8579	8784	8989
100	2.5	±10	1	2	5.0	65	115	950	-16	+7	+8	T1	8170	8375	8580	8785	8990
100	2.5	±5	1	2	5.0	65	115	950	-16	+7	+8	T1	8171	8376	8581	8786	8991
100	4.7	±20	1	2	3.6	65	115	500	-16	+7	+8	T1	8172	8377	8582	8787	8992
100	4.7	±10	1	2	3.6	65	115	500	-16	+7	+8	T1	8173	8378	8583	8788	8993
100	4.7	±5	1	2	3.6	65	115	500	-16	+7	+8	T1	8174	8379	8584	8789	8994
100	11	±20	1	4	5.0	65	115	200	-16	+7	+8	T2	8175	8380	8585	8790	8995
100	11	±10	1	4	5.0	65	115	200	-16	+7	+8	T2	8176	8381	8586	8791	8996
100	11	±5	1	4	5.0	65	115	200	-16	+7	+8	T2	8177	8382	8587	8792	8997
100	22	±20	1	9	11.8	65	115	100	-16	+7	+8	T2	8178	8383	8588	8793	8998
100	22	±10	1	9	11.8	65	115	100	-16	+7	+8	T2	8179	8384	8589	8794	8999
100	22	±5	1	9	11.8	65	115	100	-16	+7	+8	T2	8180	8385	8590	8795	9000
100	30	±20	2	12	11.8	65	115	80	-16	+7	+8	T3	8181	8386	8591	8796	9001
100	30	±10	2	12	9.1	65	115	80	-16	+7	+8	T3	8182	8387	8592	8797	9002
100	30	±5	2	12	9.1	65	115	80	-16	+7	+8	T3	8183	8388	8593	8798	9003

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:15Z
Check the source to verify that this is the current version before use.

TABLE I. Capacitor characteristics - Continued.

Rated voltage (+85°C)	Cap. 1/	Cap. tolerance	DC leakage (max)		Dissipation factor (max)	Derated voltage (+125°C)	Surge voltage (+85°C)	Impedance (max)	Capacitance change at			Case size	PIN M39006/09- Failure rate level (%/1,000 hour)				
			+25°C	+85°C & +125°C					-55°C	+85°C	+125°C		L (2.0)	M (1.0)	P (0.1)	R (0.01)	S (0.001)
volts, dc	µF	percent	µA	µA	percent	volts, dc	volts, dc	ohms	percent	percent	percent						
100	43	±20	2	17	19.7	65	115	70	-20	+7	+8	T3	8184	8389	8594	8799	9004
100	43	±10	2	17	19.7	65	115	70	-20	+7	+8	T3	8185	8390	8595	8800	9005
100	43	±5	2	17	19.7	65	115	70	-20	+7	+8	T3	8186	8391	8596	8801	9006
100	86	±20	9	36	20.7	65	115	30	-25	+15	+15	T4	8187	8392	8597	8802	9007
100	86	±10	9	36	20.7	65	115	30	-25	+15	+15	T4	8188	8393	8598	8803	9008
125	1.7	±20	1	2	7.0	85	144	1,250	-16	+7	+8	T1	8189	8394	8599	8804	9009
125	1.7	±10	1	2	7.0	85	144	1,250	-16	+7	+8	T1	8190	8395	8600	8805	9010
125	1.7	±5	1	2	7.0	85	144	1,250	-16	+7	+8	T1	8191	8396	8601	8806	9011
125	3.6	±20	1	2	4.1	85	144	600	-16	+7	+8	T1	8192	8397	8602	8807	9012
125	3.6	±10	1	2	4.1	85	144	600	-16	+7	+8	T1	8193	8398	8603	8808	9013
125	3.6	±5	1	2	4.1	85	144	600	-16	+7	+8	T1	8194	8399	8604	8809	9014
125	9	±20	1	5	10.2	85	144	240	-16	+7	+8	T2	8195	8400	8605	8810	9015
125	9	±10	1	5	10.2	85	144	240	-16	+7	+8	T2	8196	8401	8606	8811	9016
125	9	±5	1	5	10.2	85	144	240	-16	+7	+8	T2	8197	8402	8607	8812	9017
125	14	±20	1	7	12.7	85	144	167	-16	+7	+8	T2	8198	8403	8608	8813	9018
125	14	±10	1	7	12.7	85	144	167	-16	+7	+8	T2	8199	8404	8609	8814	9019
125	14	±5	1	7	12.7	85	144	167	-16	+7	+8	T2	8200	8405	8610	8815	9020
125	18	±20	2	9	15.0	85	144	129	-16	+7	+8	T3	8201	8406	8611	8816	9021
125	18	±10	2	9	15.0	85	144	129	-16	+7	+8	T3	8202	8407	8612	8817	9022
125	18	±5	2	9	15.0	85	144	129	-16	+7	+8	T3	8203	8408	8613	8818	9023
125	25	±20	2	13	19.0	85	144	93	-16	+7	+8	T3	8204	8409	8614	8819	9024
125	25	±10	2	13	19.0	85	144	93	-16	+7	+8	T3	8205	8410	8615	8820	9025
125	25	±5	2	13	19.0	85	144	93	-16	+7	+8	T3	9026	9029	9032	9035	9038
125	56	±20	10	40	17.5	85	144	32	-25	+15	+15	T4	9027	9030	9033	9036	9039
125	56	±10	10	40	17.5	85	144	32	-25	+15	+15	T4	9028	9031	9034	9037	9040

1/ The asterisk (*) indicates high-capacitance series.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:15Z
Check the source to verify that this is the current version before use.

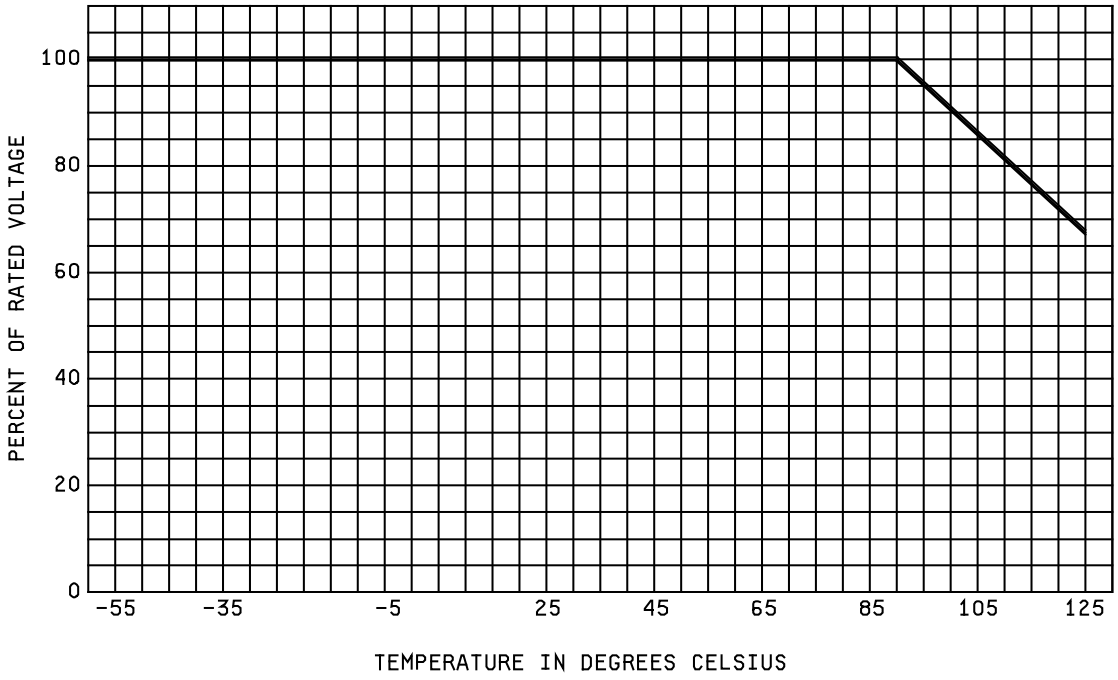


FIGURE 2. Voltage derating with temperature.

REQUIREMENTS:

Design and construction:

Dimensions and configuration – See figure 1.

Case - Shall be of a homogeneous material and impervious to the electrolyte (e.g., silver, tantalum, or niobium).

Type - Tubular, insulated.

Seal type - Hermetic (glass-to-tantalum anode).

Terminals - Axial-wire lead:

Anode (type N51 of MIL-STD-1276).

Cathode (type C51 of MIL-STD-1276).

Rated temperature: -55°C to +85°C, voltage derated to +125°C (see figure 2).

Rated voltage: See table I.

Capacitance (Cap.) (nom): See table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:15Z
Check the source to verify that this is the current version before use.

Cap. tolerance: See table I.

FR level: See table I.

Constant voltage conditioning: As specified in MIL-PRF-39006.

DC leakage (DCL) (max) (at 25°C): See table I.

Cap. (nom): Method 305 of MIL-STD-202. See table I.

Dissipation factor (DF) (max): See table I.

Seal: Method 112 of MIL-STD-202, conditions A and C.

Shock (specified pulse): Method 213 of MIL-STD-202, condition I (100 G).

Vibration, high frequency: Method 204 of MIL-STD-202, condition D (20 G).

DCL: 125 percent (max) of 25°C value of table I.

ΔCap.: Within ±5 percent of initial measurement.

DF: 115 percent (max) of initial requirement.

Thermal shock: Method 107 of MIL-STD-202, condition A (with step 3 at +125°C). Number of cycles = 30.

DCL: 125 percent (max) of 25°C value of table I.

ΔCap.: Within ±5 percent of initial measurement.

DF: 115 percent (max) of initial requirement.

Salt atmosphere: Method 101 of MIL-STD-202, condition B (48 hours).

Solderability: Method 208 of MIL-STD-202.

Terminal strength:

Pull: Method 211 of MIL-STD-202, condition A.

Wire-lead bend: In accordance with MIL-PRF-39006.

Surge voltage: See table I.

Moisture resistance: Method 106 of MIL-STD-202.

DCL: 125 percent (max) of 25°C value of table I.

ΔCap.: Within ±8 percent of initial measurement.

DF: 115 percent (max) of initial requirement.

Dielectric withstanding voltage (DWV): Method 301 of MIL-STD-202. 2,000 V dc, minimum.

Insulation resistance (IR): Method 302 of MIL-STD-202, condition B. 100, megohms, minimum.

Low temperature (storage): Method 502 of MIL-STD-810.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:15Z
Check the source to verify that this is the current version before use.

DCL: See table I.

ΔCap.: Within ±5 percent of initial measurement.

DF: See table I.

Stability at low and high temperatures:

Step 1 (+25°C):

DCL: See table I.

ΔCap.: Within tolerance of table I value.

DF: See table I.

Step 2 (-55°C):

Imp. See table I.

ΔCap.: See table I.

Step 3 (+25°C):

DCL: See table I.

ΔCap.: Within ±5 percent of step 1 value.

DF: See table I.

Step 4 (+85°C):

DCL: See table I.

ΔCap.: See table I.

DF: See table I.

Step 5 (+125°C):

DCL: See table I.

ΔCap.: See table I.

DF: See table I.

Step 6 (+25°C):

DCL: See table I.

ΔCap.: Within ±5 percent of step 1 value.

DF: See table I.

Reverse voltage: Not applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:15Z
Check the source to verify that this is the current version before use.

Life at 85°C: Method 108 of MIL-STD-202.

2,000 hours (qualification):

DCL: See table I.

ΔCap.: Within ±10 percent of initial measurement.

DF: See table I.

10,000 hours (group B) and extended life:

DCL (85°C): 125 percent (max) of table I value.

DCL (25°C): See table I.

ΔCap.: Within +10 percent, -20 percent of initial measurement.

DF: 200 percent (max) of table I value.

DWV: 2,000 V dc, minimum.

IR.: 100 megohms, minimum.

Vacuum life (at +85°C):

DCL: See table I.

ΔCap.: Within ±20 percent of initial measurement.

DF: See table I.

Weight loss: 4.1 mg, maximum.

Life at 125°C: Method 108 of MIL-STD-202.

DCL: See table I.

ΔCap.: Within +10 percent, -20 percent of initial measurement.

DF: 200 percent (max) of table I value.

DWV: 2,000 V dc, minimum.

IR.: 100 megohms, minimum.

2,000 hours (group C):

DCL (125°C): 125 percent (max) of table I value.

DCL (25°C): See table I.

ΔCap.: Within +10 percent, -20 percent of initial measurement.

DF: 200 percent (max) of table I value.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:15Z
Check the source to verify that this is the current version before use.

DWV: 2,000 V dc, minimum.

IR.: 100 megohms, minimum.

Barometric pressure: Method 105 of MIL-STD-202, condition E (150,000 feet).

Test voltage: Rated voltage.

Fungus: Method 508 of MIL-STD-810.

Resistance to solvents: Method 215 of MIL-STD-202.

Resistance to soldering heat: Method 210 of MIL-STD-202, condition B.

DCL: See table I.

ΔCap.: Within ±5 percent of initial measurement.

DF: See table I.

Marking: In accordance with MIL-PRF-39006.

Polarity: Series of plus (+) symbols encircling positive end (see figure 1).

Voltage groups (85°C rated voltage):

I - - - - - - - - - - 6 to 15 V inclusive
II - - - - - - - - - - 25 to 75 V inclusive.
III - - - - - - - - - - 100 V and 125 V.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:15Z
Check the source to verify that this is the current version before use.

TABLE II. Substitutability date - "G" seal type.

Dash number in MIL-C-39006/9D					Substitutable for dash no in:														
					MIL-C-39006/9C					MIL-C-39006/9B					MIL-C-39006/9A				
L	M	P	R	S	L	M	P	R	S	L	M	P	R	S	L	M	P	R	S
8001	8206	8411	8616	8821	6001	6206	6411	6616	6821	4001	4206	4411	4616	4821	1001	1125	1249	1373	1497
8002	8207	8412	8617	8822	6002	6207	6412	6617	6822	4002	4207	4412	4617	4822	1002	1126	1250	1374	1498
8003	8208	8413	8618	8823	6003	6208	6413	6618	6823	4003	4208	4413	4618	4823			None		
8004	8209	8414	8619	8824	6004	6209	6414	6619	6824	4004	4209	4414	4619	4824	1003	1127	1251	1375	1499
8005	8210	8415	8620	8825	6005	6210	6415	6620	6825	4005	4210	4415	4620	4825	1004	1128	1252	1376	1500
8006	8211	8416	8621	8826	6006	6211	6416	6621	6826	4006	4211	4416	4621	4826			None		
8007	8212	8417	8622	8827	6007	6212	6417	6622	6827	4007	4212	4417	4622	4827	1005	1129	1253	1377	1501
8008	8213	8418	8623	8828	6008	6213	6418	6623	6828	4008	4213	4418	4623	4828	1006	1130	1254	1378	1502
8009	8214	8419	8624	8829	6009	6214	6419	6624	6829	4009	4214	4419	4624	4829			None		
8010	8215	8420	8625	8830	6010	6215	6420	6625	6830	4010	4215	4420	4625	4830	1007	1131	1255	1379	1503
8011	8216	8421	8626	8831	6011	6216	6421	6626	6831	4011	4216	4421	4626	4831	1008	1132	1256	1380	1504
8012	8217	8422	8627	8832	6012	6217	6422	6627	6832	4012	4217	4422	4627	4832			None		
8013	8218	8423	8628	8833	6013	6218	6423	6628	6833	4013	4218	4423	4628	4833	1009	1133	1257	1381	1505
8014	8219	8424	8629	8834	6014	6219	6424	6629	6834	4014	4219	4424	4629	4834	1010	1134	1258	1382	1506
8015	8220	8425	8630	8835	6015	6220	6425	6630	6835	4015	4220	4425	4630	4835			None		
8016	8221	8426	8631	8836	6016	6221	6426	6631	6836	4016	4221	4426	4631	4836	1011	1135	1259	1383	1507
8017	8222	8427	8632	8837	6017	6222	6427	6632	6837	4017	4222	4427	4632	4837	1012	1136	1260	1384	1508
8018	8223	8428	8633	8838	6018	6223	6428	6633	6838	4018	4223	4428	4633	4838			None		
8019	8224	8429	8634	8839	6019	6224	6429	6634	6839	4019	4224	4429	4634	4839			None		
8020	8225	8430	8635	8840	6020	6225	6430	6635	6840	4020	4225	4430	4635	4840			None		
8021	8226	8431	8636	8841	6021	6226	6431	6636	6841	4021	4226	4431	4636	4841	1013	1137	1261	1385	1509
8022	8227	8432	8637	8842	6022	6227	6432	6637	6842	4022	4227	4432	4637	4842	1014	1138	1262	1386	1510
8023	8228	8433	8638	8843	6023	6228	6433	6638	6843	4023	4228	4433	4638	4843			None		
8024	8229	8434	8639	8844	6024	6229	6434	6639	6844	4024	4229	4434	4639	4844	1015	1139	1263	1387	1511
8025	8230	8435	8640	8845	6025	6230	6435	6640	6845	4025	4230	4435	4640	4845	1016	1140	1264	1388	1512
8026	8231	8436	8641	8846	6026	6231	6436	6641	6846	4026	4231	4436	4641	4846			None		
8027	8232	8437	8642	8847	6027	6232	6437	6642	6847	4027	4232	4437	4642	4847	1017	1141	1265	1389	1513
8028	8233	8438	8643	8848	6028	6233	6438	6643	6848	4028	4233	4438	4643	4848	1018	1142	1266	1390	1514
8029	8234	8439	8644	8849	6029	6234	6439	6644	6849	4029	4234	4439	4644	4849			None		
8030	8235	8440	8645	8850	6030	6235	6440	6645	6850	4030	4235	4440	4645	4850	1019	1143	1267	1391	1515
8031	8236	8441	8646	8851	6031	6236	6441	6646	6851	4031	4236	4441	4646	4851	1020	1144	1268	1392	1516
8032	8237	8442	8647	8852	6032	6237	6442	6647	6852	4032	4237	4442	4647	4852			None		
8033	8238	8443	8648	8853	6033	6238	6443	6648	6853	4033	4238	4443	4648	4853			None		
8034	8239	8444	8649	8854	6034	6239	6444	6649	6854	4034	4239	4444	4649	4854			None		
8035	8240	8445	8650	8855	6035	6240	6445	6650	6855	4035	4240	4445	4650	4855	1021	1145	1269	1393	1517
8036	8241	8446	8651	8856	6036	6241	6446	6651	6856	4036	4241	4446	4651	4856	1022	1146	1270	1394	1518
8037	8242	8447	8652	8857	6037	6242	6447	6652	6857	4037	4242	4447	4652	4857			None		

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:15Z
Check the source to verify that this is the current version before use.

TABLE II. Substitutability date - "G" seal type - Continued.

Dash number in MIL-C-39006/9D					Substitutable for dash no in:														
					MIL-C-39006/9C					MIL-C-39006/9B					MIL-C-39006/9A				
L	M	P	R	S	L	M	P	R	S	L	M	P	R	S	L	M	P	R	S
8038	8243	8448	8653	8858	6038	6243	6448	6653	6858	4038	4243	4448	4653	4858	1023	1147	1271	1395	1519
8039	8244	8449	8654	8859	6039	6244	6449	6654	6859	4039	4244	4449	4654	4859	1024	1148	1272	1396	1520
8040	8245	8450	8655	8860	6040	6245	6450	6655	6860	4040	4245	4450	4655	4860			None		
8041	8246	8451	8656	8861	6041	6246	6451	6656	6861	4041	4246	4451	4656	4861	1025	1149	1273	1397	1521
8042	8247	8452	8657	8862	6042	6247	6452	6657	6862	4042	4247	4452	4657	4862	1026	1150	1274	1398	1522
8043	8248	8453	8658	8863	6043	6248	6453	6658	6863	4043	4248	4453	4658	4863			None		
8044	8249	8454	8659	8864	6044	6249	6454	6659	6864	4044	4249	4454	4659	4864	1027	1151	1275	1399	1523
8045	8250	8455	8660	8865	6045	6250	6455	6660	6865	4045	4250	4455	4660	4865	1028	1152	1276	1400	1524
8046	8251	8456	8661	8866	6046	6251	6456	6661	6866	4046	4251	4456	4661	4866			None		
8047	8252	8457	8662	8867	6047	6252	6457	6662	6867	4047	4252	4457	4662	4867	1029	1153	1277	1401	1525
8048	8253	8458	8663	8868	6048	6253	6458	6663	6868	4048	4253	4458	4663	4868	1030	1154	1278	1402	1526
8049	8254	8459	8664	8869	6049	6254	6459	6664	6869	4049	4254	4459	4664	4869			None		
8050	8255	8460	8665	8870	6050	6255	6460	6665	6870	4050	4255	4460	4665	4870	1031	1155	1279	1403	1527
8051	8256	8461	8666	8871	6051	6256	6461	6666	6871	4051	4256	4461	4666	4871	1032	1156	1280	1404	1528
8052	8257	8462	8667	8872	6052	6257	6462	6667	6872	4052	4257	4462	4667	4872			None		
8053	8258	8463	8668	8873	6053	6258	6463	6668	6873	4053	4258	4463	4668	4873			None		
8054	8259	8464	8669	8874	6054	6259	6464	6669	6874	4054	4259	4464	4669	4874			None		
8055	8260	8465	8670	8875	6055	6260	6465	6670	6875	4055	4260	4465	4670	4875	1033	1157	1281	1405	1529
8056	8261	8466	8671	8876	6056	6261	6466	6671	6876	4056	4261	4466	4671	4876	1034	1158	1282	1406	1530
8057	8262	8467	8672	8877	6057	6262	6467	6672	6877	4057	4262	4467	4672	4877			None		
8058	8263	8468	8673	8878	6058	6263	6468	6673	6878	4058	4263	4468	4673	4878	1035	1159	1283	1407	1531
8059	8264	8469	8674	8879	6059	6264	6469	6674	6879	4059	4264	4469	4674	4879	1036	1160	1284	1408	1532
8060	8265	8470	8675	8880	6060	6265	6470	6675	6880	4060	4265	4470	4675	4880			None		
8061	8266	8471	8676	8881	6061	6266	6471	6676	6881	4061	4266	4471	4676	4881	1037	1161	1285	1409	1533
8062	8267	8472	8677	8882	6062	6267	6472	6677	6882	4062	4267	4472	4677	4882	1038	1162	1286	1410	1534
8063	8268	8473	8678	8883	6063	6268	6473	6678	6883	4063	4268	4473	4678	4883			None		
8064	8269	8474	8679	8884	6064	6269	6474	6679	6884	4064	4269	4474	4679	4884	1039	1163	1287	1411	1535
8065	8270	8475	8680	8885	6065	6270	6475	6680	6885	4065	4270	4475	4680	4885	1040	1164	1288	1412	1536
8066	8271	8476	8681	8886	6066	6271	6476	6681	6886	4066	4271	4476	4681	4886			None		
8067	8272	8477	8682	8887	6067	6272	6477	6682	6887	4067	4272	4477	4682	4887	1041	1165	1289	1413	1537
8068	8273	8478	8683	8888	6068	6273	6478	6683	6888	4068	4273	4478	4683	4888	1042	1166	1290	1414	1538
8069	8274	8479	8684	8889	6069	6274	6479	6684	6889	4069	4274	4479	4684	4889			None		
8070	8275	8480	8685	8890	6070	6275	6480	6685	6890	4070	4275	4480	4685	4890	1043	1167	1291	1415	1539
8071	8276	8481	8686	8891	6071	6276	6481	6686	6891	4071	4276	4481	4686	4891	1044	1168	1292	1416	1540
8072	8277	8482	8687	8892	6072	6277	6482	6687	6892	4072	4277	4482	4687	4892			None		
8073	8278	8483	8688	8893	6073	6278	6483	6688	6893	4073	4278	4483	4688	4893			None		
8074	8279	8484	8689	8894	6074	6279	6484	6689	6894	4074	4279	4484	4689	4894			None		

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:15Z
Check the source to verify that this is the current version before use.

TABLE II. Substitutability date - "G" seal type - Continued.

Dash number in MIL-C-39006/9D					Substitutable for dash no in:														
					MIL-C-39006/9C					MIL-C-39006/9B					MIL-C-39006/9A				
L	M	P	R	S	L	M	P	R	S	L	M	P	R	S	L	M	P	R	S
8075	8280	8485	8690	8895	6075	6280	6485	6690	6895	4075	4280	4485	4690	4895	1045	1169	1293	1417	1541
8076	8281	8486	8691	8896	6076	6281	6486	6691	6896	4076	4281	4486	4691	4896	1046	1170	1294	1418	1542
8077	8282	8487	8692	8897	6077	6282	6487	6692	6897	4077	4282	4487	4692	4897			None		
8078	8283	8488	8693	8898	6078	6283	6488	6693	6898	4078	4283	4488	4693	4898	1047	1171	1295	1419	1543
8079	8284	8489	8694	8899	6079	6284	6489	6694	6899	4079	4284	4489	4694	4899	1048	1172	1296	1420	1544
8080	8285	8490	8695	8900	6080	6285	6490	6695	6900	4080	4285	4490	4695	4900			None		
8081	8286	8491	8696	8901	6081	6286	6491	6696	6901	4081	4286	4491	4696	4901	1049	1173	1297	1421	1545
8082	8287	8492	8697	8902	6082	6287	6492	6697	6902	4082	4287	4492	4697	4902	1050	1174	1298	1422	1546
8083	8288	8493	8698	8903	6083	6288	6493	6698	6903	4083	4288	4493	4698	4903			None		
8084	8289	8494	8699	8904	6084	6289	6494	6699	6904	4084	4289	4494	4699	4904	1051	1175	1299	1423	1547
8085	8290	8495	8700	8905	6085	6290	6495	6700	6905	4085	4290	4495	4700	4905	1052	1176	1300	1424	1548
8086	8291	8496	8701	8906	6086	6291	6496	6701	6906	4086	4291	4496	4701	4906			None		
8087	8292	8497	8702	8907	6087	6292	6497	6702	6907	4087	4292	4497	4702	4907			None		
8088	8293	8498	8703	8908	6088	6293	6498	6703	6908	4088	4293	4498	4703	4908			None		
8089	8294	8499	8704	8909	6089	6294	6499	6704	6909	4089	4294	4499	4704	4909	1053	1177	1301	1425	1549
8090	8295	8500	8705	8910	6090	6295	6500	6705	6910	4090	4295	4500	4705	4910	1054	1178	1302	1426	1550
8091	8296	8501	8706	8911	6091	6296	6501	6706	6911	4091	4296	4501	4706	4911			None		
8092	8297	8502	8707	8912	6092	6297	6502	6707	6912	4092	4297	4502	4707	4912	1055	1179	1303	1427	1551
8093	8298	8503	8708	8913	6093	6298	6503	6708	6913	4093	4298	4503	4708	4913	1056	1180	1304	1428	1552
8094	8299	8504	8709	8914	6094	6299	6504	6709	6914	4094	4299	4504	4709	4914			None		
8095	8300	8505	8710	8915	6095	6300	6505	6710	6915	4095	4300	4505	4710	4915	1057	1181	1305	1429	1553
8096	8301	8506	8711	8916	6096	6301	6506	6711	6916	4096	4301	4506	4711	4916	1058	1182	1306	1430	1554
8097	8302	8507	8712	8917	6097	6302	6507	6712	6917	4097	4302	4507	4712	4917			None		
8098	8303	8508	8713	8918	6098	6303	6508	6713	6918	4098	4303	4508	4713	4918	1059	1183	1307	1431	1555
8099	8304	8509	8714	8919	6099	6304	6509	6714	6919	4099	4304	4509	4714	4919	1060	1184	1308	1432	1556
8100	8305	8510	8715	8920	6100	6305	6510	6715	6920	4100	4305	4510	4715	4920			None		
8101	8306	8511	8716	8921	6101	6306	6511	6716	6921	4101	4306	4511	4716	4921	1061	1185	1309	1433	1557
8102	8307	8512	8717	8922	6102	6307	6512	6717	6922	4102	4307	4512	4717	4922	1062	1186	1310	1434	1558
8103	8308	8513	8718	8923	6103	6308	6513	6718	6923	4103	4308	4513	4718	4923			None		
8104	8309	8514	8719	8924	6104	6309	6514	6719	6924	4104	4309	4514	4719	4924	1063	1187	1311	1435	1559
8105	8310	8515	8720	8925	6105	6310	6515	6720	6925	4105	4310	4515	4720	4925	1064	1188	1312	1436	1560
8106	8311	8516	8721	8926	6106	6311	6516	6721	6926	4106	4311	4516	4721	4926			None		
8107	8312	8517	8722	8927	6107	6312	6517	6722	6927	4107	4312	4517	4722	4927			None		
8108	8313	8518	8723	8928	6108	6313	6518	6723	6928	4108	4313	4518	4723	4928			None		
8109	8314	8519	8724	8929	6109	6314	6519	6724	6929	4109	4314	4519	4724	4929	1065	1189	1313	1437	1561
8110	8315	8520	8725	8930	6110	6315	6520	6725	6930	4110	4315	4520	4725	4930	1066	1190	1314	1438	1562
8111	8316	8521	8726	8931	6111	6316	6521	6726	6931	4111	4316	4521	4726	4931			None		

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:15Z
Check the source to verify that this is the current version before use.

TABLE II. Substitutability date - "G" seal type - Continued.

Dash number in MIL-C-39006/9D					Substitutable for dash no in:														
					MIL-C-39006/9C					MIL-C-39006/9B					MIL-C-39006/9A				
L	M	P	R	S	L	M	P	R	S	L	M	P	R	S	L	M	P	R	S
8112	8317	8522	8727	8932	6112	6317	6522	6727	6932	4112	4317	4522	4727	4932	1067	1191	1315	1439	1563
8113	8318	8523	8728	8933	6113	6318	6523	6728	6933	4113	4318	4523	4728	4933	1068	1192	1316	1440	1564
8114	8319	8524	8729	8934	6114	6319	6524	6729	6934	4114	4319	4524	4729	4934			None		
8115	8320	8525	8730	8935	6115	6320	6525	6730	6935	4115	4320	4525	4730	4935	1069	1193	1317	1441	1565
8116	8321	8526	8731	8936	6116	6321	6526	6731	6936	4116	4321	4526	4731	4936	1070	1194	1318	1442	1566
8117	8322	8527	8732	8937	6117	6322	6527	6732	6937	4117	4322	4527	4732	4937			None		
8118	8323	8528	8733	8938	6118	6323	6528	6733	6938	4118	4323	4528	4733	4938	1071	1195	1319	1443	1567
8119	8324	8529	8734	8939	6119	6324	6529	6734	6939	4119	4324	4529	4734	4939	1072	1196	1320	1444	1568
8120	8325	8530	8735	8940	6120	6325	6530	6735	6940	4120	4325	4530	4735	4940			None		
8121	8326	8531	8736	8941	6121	6326	6531	6736	6941	4121	4326	4531	4736	4941	1073	1197	1321	1445	1569
8122	8327	8532	8737	8942	6122	6327	6532	6737	6942	4122	4327	4532	4737	4942	1074	1198	1322	1446	1570
8123	8328	8533	8738	8943	6123	6328	6533	6738	6943	4123	4328	4533	4738	4943			None		
8124	8329	8534	8739	8944	6124	6329	6534	6739	6944	4124	4329	4534	4739	4944	1075	1199	1323	1447	1571
8125	8330	8535	8740	8945	6125	6330	6535	6740	6945	4125	4330	4535	4740	4945	1076	1200	1324	1448	1572
8126	8331	8536	8741	8946	6126	6331	6536	6741	6946	4126	4331	4536	4741	4946			None		
8127	8332	8537	8742	8947	6127	6332	6537	6742	6947	4127	4332	4537	4742	4947			None		
8128	8333	8538	8743	8948	6128	6333	6538	6743	6948	4128	4333	4538	4743	4948			None		
8129	8334	8539	8744	8949	6129	6334	6539	6744	6949	4129	4334	4539	4744	4949	1077	1201	1325	1449	1573
8130	8335	8540	8745	8950	6130	6335	6540	6745	6950	4130	4335	4540	4745	4950	1078	1202	1326	1450	1574
8131	8336	8541	8746	8951	6131	6336	6541	6746	6951	4131	4336	4541	4746	4951			None		
8132	8337	8542	8747	8952	6132	6337	6542	6747	6952	4132	4337	4542	4747	4952	1079	1203	1327	1451	1575
8133	8338	8543	8748	8953	6133	6338	6543	6748	6953	4133	4338	4543	4748	4953	1080	1204	1328	1452	1576
8134	8339	8544	8749	8954	6134	6339	6544	6749	6954	4134	4339	4544	4749	4954			None		
8135	8340	8545	8750	8955	6135	6340	6545	6750	6955	4135	4340	4545	4750	4955	1081	1205	1329	1453	1577
8136	8341	8546	8751	8956	6136	6341	6546	6751	6956	4136	4341	4546	4751	4956	1082	1206	1330	1454	1578
8137	8342	8547	8752	8957	6137	6342	6547	6752	6957	4137	4342	4547	4752	4957			None		
8138	8343	8548	8753	8958	6138	6343	6548	6753	6958	4138	4343	4548	4753	4958	1083	1207	1331	1455	1579
8139	8344	8549	8754	8959	6139	6344	6549	6754	6959	4139	4344	4549	4754	4959	1084	1208	1332	1456	1580
8140	8345	8550	8755	8960	6140	6345	6550	6755	6960	4140	4345	4550	4755	4960			None		
8141	8346	8551	8756	8961	6141	6346	6551	6756	6961	4141	4346	4551	4756	4961	1085	1209	1333	1457	1581
8142	8347	8552	8757	8962	6142	6347	6552	6757	6962	4142	4347	4552	4757	4962	1086	1210	1334	1458	1582
8143	8348	8553	8758	8963	6143	6348	6553	6758	6963	4143	4348	4553	4758	4963			None		
8144	8349	8554	8759	8964	6144	6349	6554	6759	6964	4144	4349	4554	4759	4964	1087	1211	1335	1459	1583
8145	8350	8555	8760	8965	6145	6350	6555	6760	6965	4145	4350	4555	4760	4965	1088	1212	1336	1460	1584
8146	8351	8556	8761	8966	6146	6351	6556	6761	6966	4146	4351	4556	4761	4966			None		
8147	8352	8557	8762	8967	6147	6352	6557	6762	6967	4147	4352	4557	4762	4967			None		
8148	8353	8558	8763	8968	6148	6353	6558	6763	6968	4148	4353	4558	4763	4968			None		

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:15Z
Check the source to verify that this is the current version before use.

TABLE II. Substitutability date - "G" seal type - Continued.

Dash number in MIL-C-39006/9D					Substitutable for dash no in:														
					MIL-C-39006/9C					MIL-C-39006/9B					MIL-C-39006/9A				
L	M	P	R	S	L	M	P	R	S	L	M	P	R	S	L	M	P	R	S
8149	8354	8559	8764	8969	6149	6354	6559	6764	6969	4149	4354	4559	4764	4969	1089	1213	1337	1461	1585
8150	8355	8560	8765	8970	6150	6355	6560	6765	6970	4150	4355	4560	4765	4970	1090	1214	1338	1462	1586
8151	8356	8561	8766	8971	6151	6356	6561	6766	6971	4151	4356	4561	4766	4971			None		
8152	8357	8562	8767	8972	6152	6357	6562	6767	6972	4152	4357	4562	4767	4972	1091	1215	1339	1463	1587
8153	8358	8563	8768	8973	6153	6358	6563	6768	6973	4153	4358	4563	4768	4973	1092	1216	1340	1464	1588
8154	8359	8564	8769	8974	6154	6359	6564	6769	6974	4154	4359	4564	4769	4974			None		
8155	8360	8565	8770	8975	6155	6360	6565	6770	6975	4155	4360	4565	4770	4975	1093	1217	1341	1465	1589
8156	8361	8566	8771	8976	6156	6361	6566	6771	6976	4156	4361	4566	4771	4976	1094	1218	1342	1466	1590
8157	8362	8567	8772	8977	6157	6362	6567	6772	6977	4157	4362	4567	4772	4977			None		
8158	8363	8568	8773	8978	6158	6363	6568	6773	6978	4158	4363	4568	4773	4978	1095	1219	1343	1467	1591
8159	8364	8569	8774	8979	6159	6364	6569	6774	6979	4159	4364	4569	4774	4979	1096	1220	1344	1468	1592
8160	8365	8570	8775	8980	6160	6365	6570	6775	6980	4160	4365	4570	4775	4980			None		
8161	8366	8571	8776	8981	6161	6366	6571	6776	6981	4161	4366	4571	4776	4981	1097	1221	1345	1469	1593
8162	8367	8572	8777	8982	6162	6367	6572	6777	6982	4162	4367	4572	4777	4982	1098	1222	1346	1470	1594
8163	8368	8573	8778	8983	6163	6368	6573	6778	6983	4163	4368	4573	4778	4983			None		
8164	8369	8574	8779	8984	6164	6369	6574	6779	6984	4164	4369	4574	4779	4984	1099	1223	1347	1471	1595
8165	8370	8575	8780	8985	6165	6370	6575	6780	6985	4165	4370	4575	4780	4985	1100	1224	1348	1472	1596
8166	8371	8576	8781	8986	6166	6371	6576	6781	6986	4166	4371	4576	4781	4986			None		
8167	8372	8577	8782	8987	6167	6372	6577	6782	6987	4167	4372	4577	4782	4987			None		
8168	8373	8578	8783	8988	6168	6373	6578	6783	6988	4168	4373	4578	4783	4988			None		
8169	8374	8579	8784	8989	6169	6374	6579	6784	6989	4169	4374	4579	4784	4989	1101	1225	1349	1473	1597
8170	8375	8580	8785	8990	6170	6375	6580	6785	6990	4170	4375	4580	4785	4990	1102	1226	1350	1474	1598
8171	8376	8581	8786	8991	6171	6376	6581	6786	6991	4171	4376	4581	4786	4991			None		
8172	8377	8582	8787	8992	6172	6377	6582	6787	6992	4172	4377	4582	4787	4992	1103	1227	1351	1475	1599
8173	8378	8583	8788	8993	6173	6378	6583	6788	6993	4173	4378	4583	4788	4993	1104	1228	1352	1476	1600
8174	8379	8584	8789	8994	6174	6379	6584	6789	6994	4174	4379	4584	4789	4994			None		
8175	8380	8585	8790	8995	6175	6380	6585	6790	6995	4175	4380	4585	4790	4995	1105	1229	1353	1477	1601
8176	8381	8586	8791	8996	6176	6381	6586	6791	6996	4176	4381	4586	4791	4996	1106	1230	1354	1478	1602
8177	8382	8587	8792	8997	6177	6382	6587	6792	6997	4477	4382	4587	4792	4997			None		
8178	8383	8588	8793	8998	6178	6383	6588	6793	6998	4178	4383	4588	4793	4998	1107	1231	1355	1479	1603
8179	8384	8589	8794	8999	6179	6384	6589	6794	6999	4179	4384	4589	4794	4999	1108	1232	1356	1480	1604
8180	8385	8590	8795	9000	6180	6385	6590	6795	7000	4180	4385	4590	4795	5000			None		
8181	8386	8591	8796	9001	6181	6386	6591	6796	7001	4181	4386	4591	4796	5001	1109	1233	1357	1481	1605
8182	8387	8592	8797	9002	6182	6387	6592	6797	7002	4182	4387	4592	4797	5002	1110	1234	1358	1482	1606
8183	8388	8593	8798	9003	6183	6388	6593	6798	7003	4183	4388	4593	4798	5003			None		
8184	8389	8594	8799	9004	6184	6389	6594	6799	7004	4184	4389	4594	4799	5004	1111	1235	1359	1483	1607
8185	8390	8595	8800	9005	6185	6390	6595	6800	7005	4185	4390	4595	4800	5005	1112	1236	1360	1484	1608
8186	8391	8596	8801	9006	6186	6391	6596	6801	7006	4186	4391	4596	4801	5006			None		

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:15Z
Check the source to verify that this is the current version before use.

TABLE II. Substitutability date - "G" seal type - Continued.

Dash number in MIL-C-39006/9D					Substitutable for dash no in:															
					MIL-C-39006/9C					MIL-C-39006/9B					MIL-C-39006/9A				
L	M	P	R	S	L	M	P	R	S	L	M	P	R	S	L	M	P	R	S
8187	8392	8597	8802	9007	6187	6392	6597	6802	7007	4187	4392	4597	4802	5007			None		
8188	8393	8598	8803	9008	6188	6393	6598	6803	7008	4188	4393	4598	4803	5008			None		
8189	8394	8599	8804	9009	6189	6394	6599	6804	7009	4189	4394	4599	4804	5009	1113	1237	1361	1485	1609
8190	8395	8600	8805	9010	6190	6395	6600	6805	7010	4190	4395	4600	4805	5010	1114	1238	1362	1486	1610
8191	8396	8601	8806	9011	6191	6396	6601	6806	7011	4191	4396	4601	4806	5011			None		
8192	8397	8602	8807	9012	6192	6397	6602	6807	7012	4192	4397	4602	4807	5012	1115	1239	1363	1487	1611
8193	8398	8603	8808	9013	6193	6398	6603	6808	7013	4193	4398	4603	4808	5013	1116	1240	1364	1488	1612
8194	8399	8604	8809	9014	6194	6399	6604	6809	7014	4194	4399	4604	4809	5014			None		
8195	8400	8605	8810	9015	6195	6400	6605	6810	7015	4195	4400	4605	4810	5015	1117	1241	1365	1489	1613
8196	8401	8606	8811	9016	6196	6401	6606	6811	7016	4196	4401	4606	4811	5016	1118	1242	1366	1490	1614
8197	8402	8607	8812	9017	6197	6402	6607	6812	7017	4197	4402	4607	4812	5017			None		
8198	8403	8608	8813	9018	6198	6403	6608	6813	7018	4198	4403	4608	4813	5018	1119	1243	1367	1491	1615
8199	8404	8609	8814	9019	6199	6404	6609	6814	7019	4199	4404	4609	4814	5019	1120	1244	1368	1492	1616
8200	8405	8610	8815	9020	6200	6405	6610	6815	7020	4200	4405	4610	4815	5020			None		
8201	8406	8611	8816	9021	6201	6406	6611	6816	7021	5026	5029	5032	5035	5038	1121	1245	1369	1493	1617
8202	8407	8612	8817	9022	6202	6407	6612	6817	7022	5027	5030	5033	5036	5039	1122	1246	1370	1494	1618
8203	8408	8613	8818	9023	6203	6408	6613	6818	7023	5028	5031	5034	5037	5040			None		
8204	8409	8614	8819	9024	6204	6409	6614	6819	7024	4201	4406	4611	4816	5021	1123	1247	1371	1495	1619
8205	8410	8615	8820	9025	6205	6410	6615	6820	7025	4202	4407	4612	4817	5022	1124	1248	1372	1496	1620
9026	9029	9032	9035	9038	7026	7029	7032	7035	7038	4023	4408	4613	4818	5023			None		
9027	9030	9033	9036	9039	7027	7030	7033	7036	7039	4024	4409	4614	4819	5024			None		
9028	9031	9034	9037	9040	7028	7031	7034	7037	7040	4025	4410	4615	4820	5025			None		

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:15Z
Check the source to verify that this is the current version before use.

TABLE II. Substitutability date - "G" seal type - Continued.

Dash no. in /9D	Type designation in MIL-C-3965/24A	Dash no. in /9D	Substitutable for type designation in MIL-C-3965/24A	Dash no. in /9D	Substitutable for type designation in MIL-C-3965/24A	Dash no. in /9D	Substitutable for type designation in MIL-C-3965/24A	Dash no. in /9D	Substitutable for type designation in MIL-C-3965/24A
8001	CL67BB300MPG	8042	CL67BD101KPG	8083	CL67BG101JPG	8124	CL67BJ820MPG	8165	CL67BL560KPG
8002	CL67BB300KPG	8043	CL67BD101JPG	8084	CL67BG181MPG	8125	CL67BJ820KPG	8166	CL67BL560JPG
8003	CL67BB300JPG	8044	CL67BD181MPG	8085	CL67BG181KPG	8126	CL67BJ820JPG	8169	CL67BN2R5MPG
8004	CL67BB680MPG	8045	CL67BD181KPG	8086	CL67BG181JPG	8129	CL67BK040MPG	8170	CL67BN2R5KPG
8005	CL67BB680KPG	8046	CL67BD181JPG	8089	CL67BH080MPG	8130	CL67BK040KPG	8171	CL67BN2R5JPG
8006	CL67BB680JPG	8047	CL67BD251MPG	8090	CL67BH080KPG	8131	CL67BK040JPG	8172	CL67BN4R7MPG
8007	CL67BB141MPG	8048	CL67BD251KPG	8091	CL67BH080JPG	8132	CL67BK8R2MPG	8173	CL67BN4R7KPG
8008	CL67BB141KPG	8049	CL67BD251JPG	8092	CL67BH150MPG	8133	CL67BK8R2KPG	8174	CL67BN4R7JPG
8009	CL67BB141JPG	8050	CL67BD391MPG	8093	CL67BH150KPG	8134	CL67BK8R2JPG	8175	CL67BN110MPG
8010	CL67BB271MPG	8051	CL67BD391KPG	8094	CL67BH150JPG	8135	CL67BK200MPG	8176	CL67BN110KPG
8011	CL67BB271KPG	8052	CL67BD391JPG	8095	CL67BH400MPG	8136	CL67BK200KPG	8177	CL67BN110JPG
8012	CL67BB271JPG	8055	CL67BE150MPG	8096	CL67BH400KPG	8137	CL67BK200JPG	8178	CL67BN220MPG
8013	CL67BB331MPG	8056	CL67BE150KPG	8097	CL67BH400JPG	8138	CL67BK390MPG	8179	CL67BN220KPG
8014	CL67BB331KPG	8057	CL67BE150JPG	8098	CL67BH680MPG	8139	CL67BK390KPG	8180	CL67BN220JPG
8015	CL67BB331JPG	8058	CL67BE330MPG	8099	CL67BH680KPG	8140	CL67BK390JPG	8181	CL67BN300MPG
8016	CL67BB561MPG	8059	CL67BE330KPG	8100	CL67BH680JPG	8141	CL67BK500MPG	8182	CL67BN300KPG
8017	CL67BB561KPG	8060	CL67BE330JPG	8101	CL67BH101MPG	8142	CL67BK500KPG	8183	CL67BN300JPG
8018	CL67BB561JPG	8061	CL67BE700MPG	8102	CL67BH101KPG	8143	CL67BK500JPG	8184	CL67BN430MPG
8021	CL67BC250MPG	8062	CL67BE700KPG	8103	CL67BH101JPG	8144	CL67BK680MPG	8185	CL67BN430KPG
8022	CL67BC250KPG	8063	CL67BE700JPG	8104	CL67BH151MPG	8145	CL67BK680KPG	8186	CL67BN430JPG
8023	CL67BC250JPG	8064	CL67BE121MPG	8105	CL67BH151KPG	8146	CL67BK680JPG	8189	CL67BP1R7MPG
8024	CL67BC560MPG	8065	CL67BE121KPG	8106	CL67BH151JPG	8149	CL67BL3R5MPG	8190	CL67BP1R7KPG
8025	CL67BC560KPG	8066	CL67BE121JPG	8109	CL67BJ050MPG	8150	CL67BL3R5KPG	8191	CL67BP1R7JPG
8026	CL67BC560JPG	8067	CL67BE171MPG	8110	CL67BJ050KPG	8151	CL67BL3R5JPG	8192	CL67BP3R6MPG
8027	CL67BC221MPG	8068	CL67BE171KPG	8111	CL67BJ050JPG	8152	CL67BL6R8MPG	8193	CL67BP3R6KPG
8028	CL67BC221KPG	8069	CL67BE171JPG	8112	CL67BJ100MPG	8153	CL67BL6R8KPG	8194	CL67BP3R6JPG
8029	CL67BC221JPG	8070	CL67BE271MPG	8113	CL67BJ100KPG	8154	CL67BL6R8JPG	8195	CL67BP090MPG
8030	CL67BC431MPG	8071	CL67BE271KPG	8114	CL67BJ100JPG	8155	CL67BL150MPG	8196	CL67BP090KPG
8031	CL67BC431KPG	8072	CL67BE271JPG	8115	CL67BJ250MPG	8156	CL67BL150KPG	8197	CL67BP090JPG
8032	CL67BC431JPG	8075	CL67BG100MPG	8116	CL67BJ250KPG	8157	CL67BL150JPG	8198	CL67BP140MPG
8035	CL67BD200MPG	8076	CL67BG100KPG	8117	CL67BJ250JPG	8158	CL67BL330MPG	8199	CL67BP140KPG
8036	CL67BD200KPG	8077	CL67BG100JPG	8118	CL67BJ470MPG	8159	CL67BL330KPG	8200	CL67BP140JPG
8037	CL67BD200JPG	8078	CL67BG220MPG	8119	CL67BJ470KPG	8160	CL67BL330JPG	8204	CL67BP250MPG
8038	CL67BD470MPG	8079	CL67BG220KPG	8120	CL67BJ470JPG	8161	CL67BL400MPG	8205	CL67BP250KPG
8039	CL67BD470KPG	8080	CL67BG220JPG	8121	CL67BJ600MPG	8162	CL67BL400KPG	9026	CL67BP250JPG
8040	CL67BD470JPG	8081	CL67BG101MPG	8122	CL67BJ600KPG	8163	CL67BL400JPG		
8041	CL67BD101MPG	8082	CL67BG101KPG	8123	CL67BJ600JPG	8164	CL67BL560MPG		

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:15Z
Check the source to verify that this is the current version before use.

TABLE III. Substitutability data - "E" seal type.

Dash no. in MIL-C-39006/9D					Substitutable for dash no. in:																				
					MIL-C-39006/9C					MIL-C-39006/9B					MIL-C-39006/9A					MIL-C-39006/9				
L	M	P	R	S	L	M	P	R	S	L	M	P	R	S	L	M	P	R	S	L	M	P	R	S
8001	8206	8411	8616	8821	6001	6206	6411	6616	6821	1621	1826	2652	2857	3062	2001	2125	2249	2373	2497	0001	0002	0003	0004	0005
8002	8207	8412	8617	8822	6002	6207	6412	6617	6822	1622	1827	2653	2858	3063	2002	2126	2250	2374	2498	0006	0007	0008	0009	0010
8003	8208	8413	8618	8823	6003	6208	6413	6618	6823	1623	1828	2654	2859	3064			None					None		
8004	8209	8414	8619	8824	6004	6209	6414	6619	6824	1624	1829	2655	2860	3065	2003	2127	2251	2375	2499	0011	0012	0013	0014	0015
8005	8210	8415	8620	8825	6005	6210	6415	6620	6825	1625	1830	2656	2861	3066	2004	2128	2252	2376	2500	0016	0017	0018	0019	0020
8006	8211	8416	8621	8826	6006	6211	6416	6621	6826	1626	1831	2657	2862	3067			None					None		
8007	8212	8417	8622	8827	6007	6212	6417	6622	6827	1627	1832	2658	2863	3068	2005	2129	2253	2377	2501	0021	0022	0023	0024	0025
8008	8213	8418	8623	8828	6008	6213	6418	6623	6828	1628	1833	2659	2864	3069	2006	2130	2254	2378	2502	0026	0027	0028	0029	0030
8009	8214	8419	8624	8829	6009	6214	6419	6624	6829	1629	1834	2660	2865	3070			None					None		
8010	8215	8420	8625	8830	6010	6215	6420	6625	6830	1630	1835	2661	2866	3071	2007	2131	2255	2379	2503	0031	0032	0033	0034	0035
8011	8216	8421	8626	8831	6011	6216	6421	6626	6831	1631	1836	2662	2867	3072	2008	2132	2256	2380	2504	0036	0037	0038	0039	0040
8012	8217	8422	8627	8832	6012	6217	6422	6627	6832	1632	1837	2663	2868	3073			None					None		
8013	8218	8423	8628	8833	6013	6218	6423	6628	6833	1633	1838	2664	2869	3074	2009	2133	2257	2381	2505	0041	0042	0043	0044	0045
8014	8219	8424	8629	8834	6014	6219	6424	6629	6834	1634	1839	2665	2870	3075	2010	2134	2258	2382	2506	0046	0047	0048	0049	0050
8015	8220	8425	8630	8835	6015	6220	6425	6630	6835	1635	1840	2666	2871	3076			None					None		
8016	8221	8426	8631	8836	6016	6221	6426	6631	6836	1636	1841	2667	2872	3077	2011	2135	2259	2383	2507	0051	0052	0053	0054	0055
8017	8222	8427	8632	8837	6017	6222	6427	6632	6837	1637	1842	2668	2873	3078	2012	2136	2260	2384	2508	0056	0057	0058	0059	0060
8018	8223	8428	8633	8838	6018	6223	6428	6633	6838	1638	1843	2669	2874	3079			None					None		
8019	8224	8429	8634	8839	6019	6224	6429	6634	6839	1639	1844	2670	2875	3080			None					None		
8020	8225	8430	8635	8840	6020	6225	6430	6635	6840	1640	1845	2671	2876	3081			None					None		
8021	8226	8431	8636	8841	6021	6226	6431	6636	6841	1641	1846	2672	2877	3082	2013	2137	2261	2385	2509	0061	0062	0063	0064	0065
8022	8227	8432	8637	8842	6022	6227	6432	6637	6842	1642	1847	2673	2878	3083	2014	2138	2262	2386	2510	0066	0067	0068	0069	0070
8023	8228	8433	8638	8843	6023	6228	6433	6638	6843	1643	1848	2674	2879	3084			None					None		
8024	8229	8434	8639	8844	6024	6229	6434	6639	6844	1644	1849	2675	2880	3085	2015	2139	2263	2387	2511	0071	0072	0073	0074	0075
8025	8230	8435	8640	8845	6025	6230	6435	6640	6845	1645	1850	2676	2881	3086	2016	2140	2264	2388	2512	0076	0077	0078	0079	0080
8026	8231	8436	8641	8846	6026	6231	6436	6641	6846	1646	1851	2677	2882	3087			None					None		
8027	8232	8437	8642	8847	6027	6232	6437	6642	6847	1647	1852	2678	2883	3088	2017	2141	2265	2389	2513	0081	0082	0083	0084	0085
8028	8233	8438	8643	8848	6028	6233	6438	6643	6848	1648	1853	2679	2884	3089	2018	2142	2266	2390	2514	0086	0087	0088	0089	0090
8029	8234	8439	8644	8849	6029	6234	6439	6644	6849	1649	1854	2680	2885	3090			None					None		
8030	8235	8440	8645	8850	6030	6235	6440	6645	6850	1650	1855	2681	2886	3091	2019	2143	2267	2391	2515	0091	0092	0093	0094	0095
8031	8236	8441	8646	8851	6031	6236	6441	6646	6851	1651	1856	2682	2887	3092	2020	2144	2268	2392	2516	0096	0097	0098	0099	0100
8032	8237	8442	8647	8852	6032	6237	6442	6647	6852	1652	1857	2683	2888	3093			None					None		
8033	8238	8443	8648	8853	6033	6238	6443	6648	6853	1653	1858	2684	2889	3094			None					None		
8034	8239	8444	8649	8854	6034	6239	6444	6649	6854	1654	1859	2685	2890	3095			None					None		
8035	8240	8445	8650	8855	6035	6240	6445	6650	6855	1655	1860	2686	2891	3096	2021	2145	2269	2393	2517	0101	0102	0103	0104	0105
8036	8241	8446	8651	8856	6036	6241	6446	6651	6856	1656	1861	2687	2892	3097	2022	2146	2270	2394	2518	0106	0107	0108	0109	0110
8037	8242	8447	8652	8857	6037	6242	6447	6652	6857	1657	1862	2688	2893	3098			None					None		

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:15Z
Check the source to verify that this is the current version before use.

TABLE III. Substitutability data - "E" seal type - Continued.

Dash no. in MIL-C-39006/9D					Substitutable for dash no. in:																				
					MIL-C-39006/9C					MIL-C-39006/9B					MIL-C-39006/9A					MIL-C-39006/9				
L	M	P	R	S	L	M	P	R	S	L	M	P	R	S	L	M	P	R	S	L	M	P	R	S
8038	8243	8448	8653	8858	6038	6243	6448	6653	6858	1658	1863	2689	2894	3099	2023	2147	2271	2395	2519	0111	0112	0113	0114	0115
8039	8244	8449	8654	8859	6039	6244	6449	6654	6859	1659	1864	2690	2895	3100	2024	2148	2272	2396	2520	0116	0117	0118	0119	0120
8040	8245	8450	8655	8860	6040	6245	6450	6655	6860	1660	1865	2691	2896	3101			None					None		
8041	8246	8451	8656	8861	6041	6246	6451	6656	6861	1661	1866	2692	2897	3102	2025	2149	2273	2397	2521	0121	0122	0123	0124	0125
8042	8247	8452	8657	8862	6042	6247	6452	6657	6862	1662	1867	2693	2898	3103	2026	2150	2274	2398	2522	0126	0127	0128	0129	0130
8043	8248	8453	8658	8863	6043	6248	6453	6658	6863	1663	1868	2694	2899	3104			None					None		
8044	8249	8454	8659	8864	6044	6249	6454	6659	6864	1664	1869	2695	2900	3105	2027	2151	2275	2399	2523	0131	0132	0133	0134	0135
8045	8250	8455	8660	8865	6045	6250	6455	6660	6865	1665	1870	2696	2901	3106	2028	2152	2276	2400	2524	0136	0137	0138	0139	0140
8046	8251	8456	8661	8866	6046	6251	6456	6661	6866	1666	1871	2697	2902	3107			None					None		
8047	8252	8457	8662	8867	6047	6252	6457	6662	6867	1667	1872	2698	2903	3108	2029	2153	2277	2401	2525	0141	0142	0143	0144	0145
8048	8253	8458	8663	8868	6048	6253	6458	6663	6868	1668	1873	2699	2904	3109	2030	2154	2278	2402	2526	0146	0147	0148	0149	0150
8049	8254	8459	8664	8869	6049	6254	6459	6664	6869	1669	1874	2700	2905	3110			None					None		
8050	8255	8460	8665	8870	6050	6255	6460	6665	6870	1670	1875	2701	2906	3111	2031	2155	2279	2403	2527	0151	0152	0153	0154	0155
8051	8256	8461	8666	8871	6051	6256	6461	6666	6871	1671	1876	2702	2907	3112	2032	2156	2280	2404	2528	0156	0157	0158	0159	0160
8052	8257	8462	8667	8872	6052	6257	6462	6667	6872	1672	1877	2703	2908	3113			None					None		
8053	8258	8463	8668	8873	6053	6258	6463	6668	6873	1673	1878	2704	2909	3114			None					None		
8054	8259	8464	8669	8874	6054	6259	6464	6669	6874	1674	1879	2705	2910	3115			None					None		
8055	8260	8465	8670	8875	6055	6260	6465	6670	6875	1675	1880	2706	2911	3116	2033	2157	2281	2405	2529	0161	0162	0163	0164	0165
8056	8261	8466	8671	8876	6056	6261	6466	6671	6876	1676	1881	2707	2912	3117	2034	2158	2282	2406	2530	0166	0167	0168	0169	0170
8057	8262	8467	8672	8877	6057	6262	6467	6672	6877	1677	1882	2708	2913	3118			None					None		
8058	8263	8468	8673	8878	6058	6263	6468	6673	6878	1678	1883	2709	2914	3119	2035	2159	2283	2407	2531	0171	0172	0173	0174	0175
8059	8264	8469	8674	8879	6059	6264	6469	6674	6879	1679	1884	2710	2915	3120	2036	2160	2284	2408	2532	0176	0177	0178	0179	0180
8060	8265	8470	8675	8880	6060	6265	6470	6675	6880	1680	1885	2711	2916	3121			None					None		
8061	8266	8471	8676	8881	6061	6266	6471	6676	6881	1681	1886	2712	2917	3122	2037	2161	2285	2409	2533	0181	0182	0183	0184	0185
8062	8267	8472	8677	8882	6062	6267	6472	6677	6882	1682	1887	2713	2918	3123	2038	2162	2286	2410	2534	0186	0187	0188	0189	0190
8063	8268	8473	8678	8883	6063	6268	6473	6678	6883	1683	1888	2714	2919	3124			None					None		
8064	8269	8474	8679	8884	6064	6269	6474	6679	6884	1684	1889	2715	2920	3125	2039	2163	2287	2411	2535	0191	0192	0193	0194	0195
8065	8270	8475	8680	8885	6065	6270	6475	6680	6885	1685	1890	2716	2921	3126	2040	2164	2288	2412	2536	0196	0197	0198	0199	0200
8066	8271	8476	8681	8886	6066	6271	6476	6681	6886	1686	1891	2717	2922	3127			None					None		
8067	8272	8477	8682	8887	6067	6272	6477	6682	6887	1687	1892	2718	2923	3128	2041	2165	2289	2413	2537	0201	0202	0203	0204	0205
8068	8273	8478	8683	8888	6068	6273	6478	6683	6888	1688	1893	2719	2924	3129	2042	2166	2290	2414	2538	0206	0207	0208	0209	0210
8069	8274	8479	8684	8889	6069	6274	6479	6684	6889	1689	1894	2720	2925	3130			None					None		
8070	8275	8480	8685	8890	6070	6275	6480	6685	6890	1690	1895	2721	2926	3131	2043	2167	2291	2415	2539	0211	0212	0213	0214	0215
8071	8276	8481	8686	8891	6071	6276	6481	6686	6891	1691	1896	2722	2927	3132	2044	2168	2292	2416	2540	0216	0217	0218	0219	0220
8072	8277	8482	8687	8892	6072	6277	6482	6687	6892	1692	1897	2723	2928	3133			None					None		
8073	8278	8483	8688	8893	6073	6278	6483	6688	6893	1693	1898	2724	2929	3134			None					None		
8074	8279	8484	8689	8894	6074	6279	6484	6689	6894	1694	1899	2725	2930	3135			None					None		

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:15Z
Check the source to verify that this is the current version before use.

TABLE III. Substitutability data - "E" seal type - Continued.

Dash no. in MIL-C-39006/9D					Substitutable for dash no. in:																				
					MIL-C-39006/9C					MIL-C-39006/9B					MIL-C-39006/9A					MIL-C-39006/9				
L	M	P	R	S	L	M	P	R	S	L	M	P	R	S	L	M	P	R	S	L	M	P	R	S
8075	8280	8485	8690	8895	6075	6280	6485	6690	6895	1695	1900	2726	2931	3136	2045	2169	2293	2417	2541	0221	0222	0223	0224	0225
8076	8281	8486	8691	8896	6076	6281	6486	6691	6896	1696	1901	2727	2932	3137	2046	2170	2294	2218	2542	0226	0227	0228	0229	0230
8077	8282	8487	8692	8897	6077	6282	6487	6692	6897	1697	1902	2728	2933	3138			None					None		
8078	8283	8488	8693	8898	6078	6283	6488	6693	6898	1698	1903	2729	2934	3139	2047	2171	2295	2419	2543	0231	0232	0233	0234	0235
8079	8284	8489	8694	8899	6079	6284	6489	6694	6899	1699	1904	2730	2935	3140	2048	2172	2296	2420	2544	0236	0237	0238	0239	0240
8080	8285	8490	8695	8900	6080	6285	6490	6695	6900	1700	1905	2731	2936	3141			None					None		
8081	8286	8491	8696	8901	6081	6286	6491	6696	6901	1701	1906	2732	2937	3142	2049	2173	2297	2421	2545	0241	0242	0243	0244	0245
8082	8287	8492	8697	8902	6082	6287	6492	6697	6902	1702	1907	2733	2938	3143	2050	2174	2298	2422	2546	0246	0247	0248	0249	0250
8083	8288	8493	8698	8903	6083	6288	6493	6698	6903	1703	1908	2734	2939	3144			None					None		
8084	8289	8494	8699	8904	6084	6289	6494	6699	6904	1704	1909	2735	2940	3145	2051	2175	2299	2423	2547	0251	0252	0253	0254	0255
8085	8290	8495	8700	8905	6085	6290	6495	6700	6905	1705	1910	2736	2941	3146	2052	2176	2300	2424	2548	0256	0257	0258	0259	0260
8086	8291	8496	8701	8906	6086	6291	6496	6701	6906	1706	1911	2737	2942	3147			None					None		
8087	8292	8497	8702	8907	6087	6292	6497	6702	6907	1707	1912	2738	2943	3148			None					None		
8088	8293	8498	8703	8908	6088	6293	6498	6703	6908	1708	1913	2739	2944	3149			None					None		
8089	8294	8499	8704	8909	6089	6294	6499	6704	6909	1709	1914	2740	2945	3150	2053	2177	2301	2425	2549	0261	0262	0263	0264	0265
8090	8295	8500	8705	8910	6090	6295	6500	6705	6910	1710	1915	2741	2946	3151	2054	2178	2302	2426	2550	0266	0267	0268	0269	0270
8091	8296	8501	8706	8911	6091	6296	6501	6706	6911	1711	1916	2742	2947	3152			None					None		
8092	8297	8502	8707	8912	6092	6297	6502	6707	6912	1712	1917	2743	2948	3153	2055	2179	2303	2427	2551	0271	0272	0273	0274	0275
8093	8298	8503	8708	8913	6093	6298	6503	6708	6913	1713	1918	2744	2949	3154	2056	2180	2304	2428	2552	0276	0277	0278	0279	0280
8094	8299	8504	8709	8914	6094	6299	6504	6709	6914	1714	1919	2745	2950	3155			None					None		
8095	8300	8505	8710	8915	6095	6300	6505	6710	6915	1715	1920	2746	2951	3156	2057	2181	2305	2429	2553	0281	0282	0283	0284	0285
8096	8301	8506	8711	8916	6096	6301	6506	6711	6916	1716	1921	2747	2952	3157	2058	2182	2306	2430	2554	0286	0287	0288	0289	0290
8097	8302	8507	8712	8917	6097	6302	6507	6712	6917	1717	1922	2748	2953	3158			None					None		
8098	8303	8508	8713	8918	6098	6303	6508	6713	6918	1718	1923	2749	2954	3159	2059	2183	2307	2431	2555	0291	0292	0293	0294	0295
8099	8304	8509	8714	8919	6099	6304	6509	6714	6919	1719	1924	2750	2955	3160	2060	2184	2308	2432	2556	0296	0297	0298	0299	0300
8100	8305	8510	8715	8920	6100	6305	6510	6715	6920	1720	1925	2751	2956	3161			None					None		
8101	8306	8511	8716	8921	6101	6306	6511	6716	6921	1721	1926	2752	2957	3162	2061	2185	2309	2433	2557	0301	0302	0303	0304	0305
8102	8307	8512	8717	8922	6102	6307	6512	6717	6922	1722	1927	2753	2958	3163	2062	2186	2310	2434	2558	0306	0307	0308	0309	0310
8103	8308	8513	8718	8923	6103	6308	6513	6718	6923	1723	1928	2754	2959	3164			None					None		
8104	8309	8514	8719	8924	6104	6309	6514	6719	6924	1724	1929	2755	2960	3165	2063	2187	2311	2435	2559	0311	0312	0313	0314	0315
8105	8310	8515	8720	8925	6105	6310	6515	6720	6925	1725	1930	2756	2961	3166	2064	2188	2312	2436	2560	0316	0317	0318	0319	0320
8106	8311	8516	8721	8926	6106	6311	6516	6721	6926	1726	1931	2757	2962	3167			None					None		
8107	8312	8517	8722	8927	6107	6312	6517	6722	6927	1727	1932	2758	2963	3168			None					None		
8108	8313	8518	8723	8928	6108	6313	6518	6723	6928	1728	1933	2759	2964	3169			None					None		
8109	8314	8519	8724	8929	6109	6314	6519	6724	6929	1729	1934	2760	2965	3170	2065	2189	2313	2437	2561	0321	0322	0323	0324	0325
8110	8315	8520	8725	8930	6110	6315	6520	6725	6930	1730	1935	2761	2966	3171	2066	2190	2314	2438	2562	0326	0327	0328	0329	0330
8111	8316	8521	8726	8931	6111	6316	6521	6726	6931	1731	1936	2762	2967	3172			None					None		

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:15Z
Check the source to verify that this is the current version before use.

TABLE III. Substitutability data - "E" seal type - Continued.

Dash no. in MIL-C-39006/9D					Substitutable for dash no. in:																				
					MIL-C-39006/9C					MIL-C-39006/9B					MIL-C-39006/9A					MIL-C-39006/9				
L	M	P	R	S	L	M	P	R	S	L	M	P	R	S	L	M	P	R	S	L	M	P	R	S
8112	8317	8522	8727	8932	6112	6317	6522	6727	6932	1732	1937	2763	2968	3173	2067	2191	2315	2439	2563	0331	0332	0333	0334	0335
8113	8318	8523	8728	8933	6113	6318	6523	6728	6933	1733	1938	2764	2969	3174	2068	2192	2316	2440	2564	0336	0337	0338	0339	0340
8114	8319	8524	8729	8934	6114	6319	6524	6729	6934	1734	1939	2765	2970	3175			None					None		
8115	8320	8525	8730	8935	6115	6320	6525	6730	6935	1735	1940	2766	2971	3176	2069	2193	2317	2441	2565	0341	0342	0343	0344	0345
8116	8321	8526	8731	8936	6116	6321	6526	6731	6936	1736	1941	2767	2972	3177	2070	2194	2318	2442	2566	0346	0347	0348	0349	0350
8117	8322	8527	8732	8937	6117	6322	6527	6732	6937	1737	1942	2768	2973	3178			None					None		
8118	8323	8528	8733	8938	6118	6323	6528	6733	6938	1738	1943	2769	2974	3179	2071	2195	2319	2443	2567	0351	0352	0353	0354	0355
8119	8324	8529	8734	8939	6119	6324	6529	6734	6939	1739	1944	2770	2975	3180	2072	2196	2320	2444	2568	0356	0357	0358	0359	0360
8120	8325	8530	8735	8940	6120	6325	6530	6735	6940	1740	1945	2771	2976	3181			None					None		
8121	8326	8531	8736	8941	6121	6326	6531	6736	6941	1741	1946	2772	2977	3182	2073	2197	2321	2445	2569	0361	0362	0363	0364	0365
8122	8327	8532	8737	8942	6122	6327	6532	6737	6942	1742	1947	2773	2978	3183	2074	2198	2322	2446	2570	0366	0367	0368	0369	0370
8123	8328	8533	8738	8943	6123	6328	6533	6738	6943	1743	1948	2774	2979	3184			None					None		
8124	8329	8534	8739	8944	6124	6329	6534	6739	6944	1744	1949	2775	2980	3185	2075	2199	2323	2447	2571	0371	0372	0373	0374	0375
8125	8330	8535	8740	8945	6125	6330	6535	6740	6945	1745	1950	2776	2981	3186	2076	2200	2324	2448	2572	0376	0377	0378	0379	0380
8126	8331	8536	8741	8946	6126	6331	6536	6741	6946	1746	1951	2777	2982	3187			None					None		
8127	8332	8537	8742	8947	6127	6332	6537	6742	6947	1747	1952	2778	2983	3188			None					None		
8128	8333	8538	8743	8948	6128	6333	6538	6743	6948	1748	1953	2779	2984	3189			None					None		
8129	8334	8539	8744	8949	6129	6334	6539	6744	6949	1749	1954	2780	2985	3190	2077	2201	2325	2449	2573	0381	0382	0383	0384	0385
8130	8335	8540	8745	8950	6130	6335	6540	6745	6950	1750	1955	2781	2986	3191	2078	2202	2326	2450	2574	0386	0387	0388	0389	0390
8131	8336	8541	8746	8951	6131	6336	6541	6746	6951	1751	1956	2782	2987	3192			None					None		
8132	8337	8542	8747	8952	6132	6337	6542	6747	6952	1752	1957	2783	2988	3193	2079	2203	2327	2451	2575	0391	0392	0393	0394	0395
8133	8338	8543	8748	8953	6133	6338	6543	6748	6953	1753	1958	2784	2989	3194	2080	2204	2328	2452	2576	0396	0397	0398	0399	0400
8134	8339	8544	8749	8954	6134	6339	6544	6749	6954	1754	1959	2785	2990	3195			None					None		
8135	8340	8545	8750	8955	6135	6340	6545	6750	6955	1755	1960	2786	2991	3196	2081	2205	2329	2453	2577	0401	0402	0403	0404	0405
8136	8341	8546	8751	8956	6136	6341	6546	6751	6956	1756	1961	2787	2992	3197	2082	2206	2330	2454	2578	0406	0407	0408	0409	0410
8137	8342	8547	8752	8957	6137	6342	6547	6752	6957	1757	1962	2788	2993	3198			None					None		
8138	8343	8548	8753	8958	6138	6343	6548	6753	6958	1758	1963	2789	2994	3199	2083	2207	2331	2455	2579	0411	0412	0413	0414	0415
8139	8344	8549	8754	8959	6139	6344	6549	6754	6959	1759	1964	2790	2995	3200	2084	2208	2332	2456	2580	0416	0417	0418	0419	0420
8140	8345	8550	8755	8960	6140	6345	6550	6755	6960	1760	1965	2791	2996	3201			None					None		
8141	8346	8551	8756	8961	6141	6346	6551	6756	6961	1761	1966	2792	2997	3202	2085	2209	2333	2457	2581	0421	0422	0423	0424	0425
8142	8347	8552	8757	8962	6142	6347	6552	6757	6962	1762	1967	2793	2998	3203	2086	2210	2334	2458	2582	0426	0427	0428	0429	0430
8143	8348	8553	8758	8963	6143	6348	6553	6758	6963	1763	1968	2794	2999	3204			None					None		
8144	8349	8554	8759	8964	6144	6349	6554	6759	6964	1764	1969	2795	3000	3205	2087	2211	2335	2459	2583	0431	0432	0433	0434	0435
8145	8350	8555	8760	8965	6145	6350	6555	6760	6965	1765	1970	2796	3001	3206	2088	2212	2336	2460	2584	0436	0437	0438	0439	0440
8146	8351	8556	8761	8966	6146	6351	6556	6761	6966	1766	1971	2797	3002	3207			None					None		
8147	8352	8557	8762	8967	6147	6352	6557	6762	6967	1767	1972	2798	3003	3208			None					None		
8148	8353	8558	8763	8968	6148	6353	6558	6763	6968	1768	1973	2799	3004	3209			None					None		

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:15Z
Check the source to verify that this is the current version before use.

TABLE III. Substitutability data - "E" seal type - Continued.

Dash no. in MIL-C-39006/9D					Substitutable for dash no. in:																				
					MIL-C-39006/9C					MIL-C-39006/9B					MIL-C-39006/9A					MIL-C-39006/9				
L	M	P	R	S	L	M	P	R	S	L	M	P	R	S	L	M	P	R	S	L	M	P	R	S
8149	8354	8559	8764	8969	6149	6354	6559	6764	6969	1769	1974	2800	3005	3210	2089	2213	2337	2461	2585	0441	0442	0443	0444	0445
8150	8355	8560	8765	8970	6150	6355	6560	6765	6970	1770	1975	2801	3006	3211	2090	2214	2338	2262	2586	0446	0447	0448	0449	0450
8151	8356	8561	8766	8971	6151	6356	6561	6766	6971	1771	1976	2802	3007	3212			None					None		
8152	8357	8562	8767	8972	6152	6357	6562	6767	6972	1772	1977	2803	3008	3213	2091	2215	2339	2463	2587	0451	0452	0453	0454	0455
8153	8358	8563	8768	8973	6153	6358	6563	6768	6973	1773	1978	2804	3009	3214	2092	2216	2340	2464	2588	0456	0457	0458	0459	0460
8154	8359	8564	8769	8974	6154	6359	6564	6769	6974	1774	1979	2805	3010	3215			None					None		
8155	8360	8565	8770	8975	6155	6360	6565	6770	6975	1775	1980	2806	3011	3216	2093	2217	2341	2465	2589	0461	0462	0463	0464	0465
8156	8361	8566	8771	8976	6156	6361	6566	6771	6976	1776	1981	2807	3012	3217	2094	2218	2342	2466	2590	0466	0467	0468	0469	0470
8157	8362	8567	8772	8977	6157	6362	6567	6772	6977	1777	1982	2808	3013	3218			None					None		
8158	8363	8568	8773	8978	6158	6363	6568	6773	6978	1778	1983	2809	3014	3219	2095	2219	2343	2467	2591	0471	0472	0473	0474	0475
8159	8364	8569	8774	8979	6159	6364	6569	6774	6979	1779	1984	2810	3015	3220	2096	2220	2344	2468	2592	0476	0477	0478	0479	0480
8160	8365	8570	8775	8980	6160	6365	6570	6775	6980	1780	1985	2811	3016	3221			None					None		
8161	8366	8571	8776	8981	6161	6366	6571	6776	6981	1781	1986	2812	3017	3222	2097	2221	2345	2469	2593	0481	0482	0483	0484	0485
8162	8367	8572	8777	8982	6162	6367	6572	6777	6982	1782	1987	2813	3018	3223	2098	2222	2346	2470	2594	0486	0487	0488	0489	0490
8163	8368	8573	8778	8983	6163	6368	6573	6778	6983	1783	1988	2814	3019	3224			None					None		
8164	8369	8574	8779	8984	6164	6369	6574	6779	6984	1784	1989	2815	3020	3225	2099	2223	2347	2471	2595	0491	0492	0493	0494	0495
8165	8370	8575	8780	8985	6165	6370	6575	6780	6985	1785	1990	2816	3021	3226	2100	2224	2348	2472	2596	0496	0497	0498	0499	0500
8166	8371	8576	8781	8986	6166	6371	6576	6781	6986	1786	1991	2817	3022	3227			None					None		
8167	8372	8577	8782	8987	6167	6372	6577	6782	6987	1787	1992	2818	3023	3228			None					None		
8168	8373	8578	8783	8988	6168	6373	6578	6783	6988	1788	1993	2819	3024	3229			None					None		
8169	8374	8579	8784	8989	6169	6374	6579	6784	6989	1789	1994	2820	3025	3230	2101	2225	2349	2473	2597	0501	0502	0503	0504	0505
8170	8375	8580	8785	8990	6170	6375	6580	6785	6990	1790	1995	2821	3026	3231	2102	2226	2350	2474	2598	0506	0507	0508	0509	0510
8171	8376	8581	8786	8991	6171	6376	6581	6786	6991	1791	1996	2822	3027	3232			None					None		
8172	8377	8582	8787	8992	6172	6377	6582	6787	6992	1792	1997	2823	3028	3233	2103	2227	2351	2475	2599	0511	0512	0513	0514	0515
8173	8378	8583	8788	8993	6173	6378	6583	6788	6993	1793	1998	2824	3029	3234	2104	2228	2352	2476	2600	0516	0517	0518	0519	0520
8174	8379	8584	8789	8994	6174	6379	6584	6789	6994	1794	1999	2825	3030	3235			None					None		
8175	8380	8585	8790	8995	6175	6380	6585	6790	6995	1795	2621	2826	3031	3236	2105	2229	2353	2477	2601	0521	0522	0523	0524	0525
8176	8381	8586	8791	8996	6176	6381	6586	6791	6996	1796	2622	2827	3032	3237	2106	2230	2354	2478	2602	0526	0527	0528	0529	0530
8177	8382	8587	8792	8997	6177	6382	6587	6792	6997	1797	2623	2828	3033	3238			None					None		
8178	8383	8588	8793	8998	6178	6383	6588	6793	6998	1798	2624	2829	3034	3239	2107	2231	2355	2479	2603	0531	0532	0533	0534	0535
8179	8384	8589	8794	8999	6179	6384	6589	6794	6999	1799	2625	2830	3035	3240	2108	2232	2356	2480	2604	0536	0537	0538	0539	0540
8180	8385	8590	8795	9000	6180	6385	6590	6795	7000	1800	2626	2831	3036	3241			None					None		
8181	8386	8591	8796	9001	6181	6386	6591	6796	7001	1801	2627	2832	3037	3242	2109	2233	2357	2481	2605	0541	0542	0543	0544	0545
8182	8387	8592	8797	9002	6182	6387	6592	6797	7002	1802	2628	2833	3038	3243	2110	2234	2358	2482	2606	0546	0547	0548	0549	0550
8183	8388	8593	8798	9003	6183	6388	6593	6798	7003	1803	2629	2834	3039	3244			None					None		
8184	8389	8594	8799	9004	6184	6389	6594	6799	7004	1804	2630	2835	3040	3245	2111	2235	2359	2483	2607	0551	0552	0553	0554	0555
8185	8390	8595	8800	9005	6185	6390	6595	6800	7005	1805	2631	2836	3041	3246	2112	2236	2360	2484	2608	0556	0557	0558	0559	0560

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:15Z
Check the source to verify that this is the current version before use.

TABLE III. Substitutability data - "E" seal type - Continued.

Dash no. in MIL-C-39006/9D					Substitutable for dash no. in:																				
					MIL-C-39006/9C					MIL-C-39006/9B					MIL-C-39006/9A					MIL-C-39006/9				
L	M	P	R	S	L	M	P	R	S	L	M	P	R	S	L	M	P	R	S	L	M	P	R	S
8186	8391	8596	8801	9006	6186	6391	6596	6801	7006	1806	2632	2837	3042	3247			None					None		
8187	8392	8597	8802	9007	6187	6392	6597	6802	7007	1807	2633	2838	3043	3248			None					None		
8188	8393	8598	8803	9008	6188	6393	6598	6803	7008	1808	2634	2839	3044	3249			None					None		
8189	8394	8599	8804	9009	6189	6394	6599	6804	7009	1809	2635	2840	3045	3250	2113	2237	2361	2485	2609	0561	0562	0563	0564	0565
8190	8395	8600	8805	9010	6190	6395	6600	6805	7010	1810	2636	2841	3046	3251	2114	2238	2362	2486	2610	0566	0567	0568	0569	0570
8191	8396	8601	8806	9011	6191	6396	6601	6806	7011	1811	2637	2842	3047	3252			None					None		
8192	8397	8602	8807	9012	6192	6397	6602	6807	7012	1812	2638	2843	3048	3253	2115	2239	2363	2487	2611	0571	0572	0573	0574	0575
8193	8398	8603	8808	9013	6193	6398	6603	6808	7013	1813	2639	2844	3049	3254	2116	2240	2364	2488	2612	0576	0577	0578	0579	0580
8194	8399	8604	8809	9014	6194	6399	6604	6809	7014	1814	2640	2845	3050	3255			None					None		
8195	8400	8605	8810	9015	6195	6400	6605	6810	7015	1815	2641	2846	3051	3256	2117	2241	2365	2489	2613	0581	0582	0583	0584	0585
8196	8401	8606	8811	9016	6196	6401	6606	6811	7016	1816	2642	2847	3052	3257	2118	2242	2366	2490	2614	0586	0587	0588	0589	0590
8197	8402	8607	8812	9017	6197	6402	6607	6812	7017	1817	2643	2848	3053	3258			None					None		
8198	8403	8608	8813	9018	6198	6403	6608	6813	7018	1818	2644	2849	3054	3259	2119	2243	2367	2491	2615	0591	0592	0593	0594	0595
8199	8404	8609	8814	9019	6199	6404	6609	6814	7019	1819	2645	2850	3055	3260	2120	2244	2368	2492	2616	0596	0597	0598	0599	0600
8200	8405	8610	8815	9020	6200	6405	6610	6815	7020	1820	2646	2851	3056	3261			None					None		
8201	8406	8611	8816	9021	6201	6406	6611	6816	7021	3267	3270	3273	3276	3279	2121	2245	2369	2493	2617	0601	0602	0603	0604	0605
8202	8407	8612	8817	9022	6202	6407	6612	6817	7022	3268	3271	3274	3277	3280	2122	2246	2370	2494	2618	0606	0607	0608	0609	0610
8203	8408	8613	8818	9023	6203	6408	6613	6818	7023	3269	3272	3275	3278	3281			None					None		
8204	8409	8614	8819	9024	6204	6409	6614	6819	7024	1821	2647	2852	3057	3262	2123	2247	2371	2395	2619	0611	0612	0613	0614	0615
8205	8410	8615	8820	9025	6205	6410	6615	6820	7025	1822	2648	2853	3058	3263	2124	2248	2372	2396	2620	0616	0617	0618	0619	0620
9026	9029	9032	9035	9038	7026	7029	7032	7035	7038	1823	2649	2854	3059	3264			None					None		
9027	9030	9033	9036	9039	7027	7030	7033	7036	7039	1824	2650	2855	3060	3265			None					None		
9028	9031	9034	9037	9040	7028	7031	7034	7037	7040	1825	2651	2856	3061	3266			None					None		

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:15Z
Check the source to verify that this is the current version before use.

NOTE: Capacitors covered by this specification sheet are considered substitutable with the capacitors listed in table II or table III.

CHANGES FROM PREVIOUS ISSUE: The margins of this specification sheet are marked with an asterisks to indicate where changes from previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Reference documents. In addition to MIL-PRF-39006, this specification sheet references the following documents.

DEPARTMENT OF DEFENSE

MIL-STD-202	Test Method Standard, Electronic and Electrical Component Parts.
MIL-STD-1276	Leads for Electronic Component Parts.
MIL-STD-810	Environmental Engineering Consideration and Laboratory Tests.

(Copies of these documents are available on line at https://assist.daps.dla.mil/quicksearch or https://assist.daps.dla.mil or from the Standard Document Order Desk, 700 Robbins Avenue 4D, Philadelphia, PA 19111-5094).

Custodians:
Army - CR
Navy - EC
Air Force - 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5910-2010-015)

Review activities:
Navy - AS, MC, OS
Air Force - 19

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using ASSIST Online database at https://assist.daps.dla.mil

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:15Z
Check the source to verify that this is the current version before use.