
MILITARY SPECIFICATION SHEET


CAPACITORS, FIXED, FEED THROUGH, ELECTROMAGNETIC INTERFERENCE SUPPRESSION, AC AND DC (HERMETICALLY SEALED IN METAL CASES)

This specification is approved for use by the Department of the Air Force, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the capacitors described herein shall consist of this specification and the latest issue of MIL-C-83439.

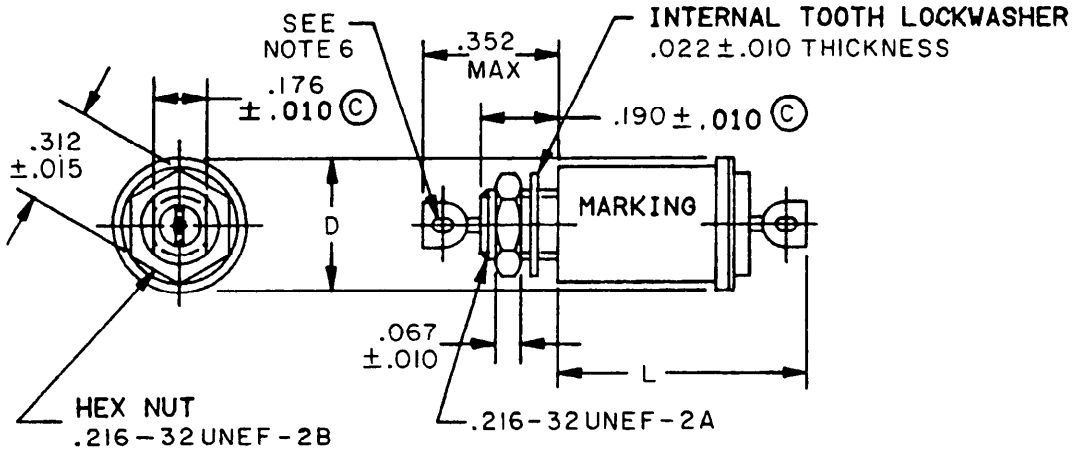

INCHES	MM	INCHES	MM
.010	0.25	.176	4.47
.015	0.38	.190	4.83
.022	0.56	.216	5.49
.067	1.70	.312	7.92
		.352	8.94



CIRCUIT CONFIGURATION

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Circuit diagram is for information only.
4. All capacitors shall be supplied with mounting hardware.
5. Use of shoulder is optional.
6. 2 holes .063 (1.60 mm) maximum or .050 x .070 (1.27 mm x 1.78 mm) oblong hole.

FIGURE 1. Case dimensions and circuit configurations.

Ⓒ denotes changes

FSC 5910

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:07Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions and electrical characteristics.

Military part number	Capacitance (µF)	Rated voltage		Max current (A)	Insulation resistance (megohms)	DC resistance (max)	Insertion loss (nom) (dB)							Dimensions	
		At 85°C	At 125°C				50 kHz	100 kHz	150 kHz	300 kHz	1 MHz	10 MHz	1 GHz	D (max) inches	L (max) inches
M83439/01-001	0.3	125 V dc	100 V dc	10	1000	.004	10	15	19	25	35	55	70	.410 (10.41)	.474 (12.04)
M83439/01-002	1.4	80 V dc	50 V dc	10	100	.004	17	23	28	33	44	48	70	.385 (9.78)	.600 (15.24)

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Material:

Case and terminals: Steel or brass, tin-plated.

Dielectric: Ceramic.

Temperature range: -55°C to +125°C.

Rated voltage: See table I.

Capacitance: See table I.

© Test frequency: 1 kHz ± 100 Hz

Capacitance tolerance: +150 percent, -0 percent.

Seal: Method 112 of MIL-STD-202, test condition letter A.

Terminal strength: Method 211 of MIL-STD-202, test condition letter A.

Applied force: 4.5 pounds +3, -0 ounces.

Dissipation factor: 3 percent.

Insertion loss (abbreviated): See table I.

Voltage drop: 0.04 volt.

DC resistance: See table I.

Immersion: Applicable.

Capacitance change: ±20 percent from initial measured value.

Moisture resistance: Applicable.

Capacitance change: ±20 percent from initial measured value.

Capacitance change at reduced temperature: ±20 percent for M83439/01-001 and +20, -65 percent for M83439/01-002.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:07Z
Check the source to verify that this is the current version before use.

Life at +85°C: Method 108 of MIL-STD-202, test condition letter D.

Operating conditions: 1.4 times dc rated voltage applied.

Measurements after exposure:

Insulation resistance: Method 302, MIL-STD-202, test condition A.

Capacitance change: Not more than ±20 percent.

Insertion loss (abbreviated).

Life at +125°C: Method 108 of MIL-STD-202, test condition letter B.

Operating conditions: 1.4 times rated voltage applied.

Part number: See table I.

Custodian:
Air Force - 85

Review activities:
Air Force - 11, 99
DLA - ES

Agent:
DLA - ES

Preparing activity:
Air Force - 85

(Project 5910-F392)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:07Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:07Z
Check the source to verify that this is the current version before use.