

MILITARY SPECIFICATION SHEET

CAPACITORS, FIXED, FEED THROUGH, ELECTROMAGNETIC INTERFERENCE SUPPRESSION, (HERMETICALLY SEALED IN METAL CASES)


This specification is approved for use by the Department of the Air Force, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the capacitors described herein shall consist of this specification and the latest issue of MIL-C-83439.

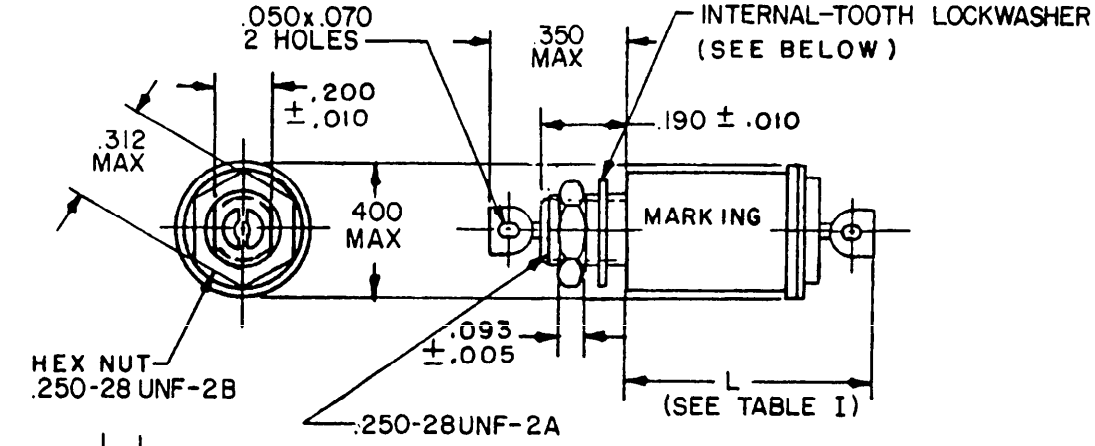

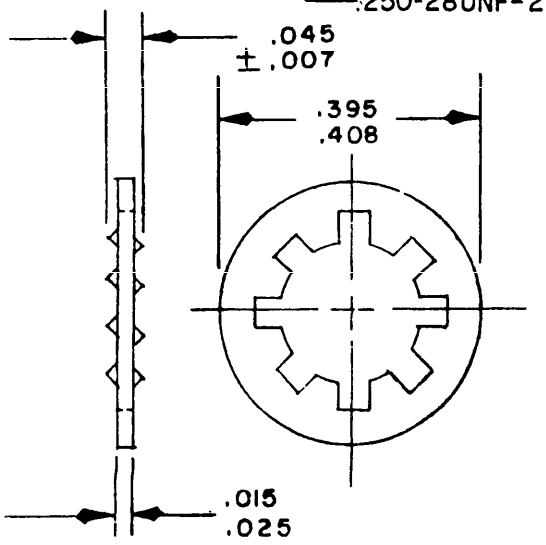

LOCKWASHER



CIRCUIT CONFIGURATION

INCHES	MM
.005	0.13
.007	0.18
.010	0.25
.015	0.38
.025	0.64
.045	1.14
.050	1.27
.070	1.78
.093	2.36
.190	4.83
.200	5.08
.250	6.35
.312	7.92
.350	8.89
.395	10.03
.400	10.16
.408	10.36

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Circuit diagram is for information only.
4. All capacitors shall be supplied with mounting hardware.
5. Use of shoulder is optional.

FIGURE 1. Case dimensions and circuit configurations.

(B) denotes changes

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:07Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1 and table I.

Material:

Case and terminals: Steel, tin-plated.

Dielectric: Ceramic.

Temperature range: -55°C to +125°C.

Rated voltage: See table I.

Capacitance: See table I.

Test frequency: 1 kHz ±100 Hz.

Capacitance tolerance: +150 percent, -0 percent.

Terminal strength: Method 211 of MIL-STD-202, test condition letter A.

Applied force: 4.5 pounds +3, -0 ounces.

Insulation resistance: Method 302 of MIL-STD-202, test condition letter A. See table I.

Dissipation factor: 3 percent.

Insertion loss (abbreviated): See table I.

Seal: Method 112 of MIL-STD-202, test condition letter A.

Voltage drop: 0.06 volt.

DC resistance: See table I.

Immersion: Applicable.

Capacitance change: Not more than ±20 percent.

Moisture resistance: Applicable.

Capacitance change: Not more than ±20 percent from initial measurement.

Capacitance change at reduced temperature: Not more than ±20 percent from initial measurement.

Life at +85°C: Method 108 of MIL-STD-202, test condition letter D.

Operating conditions: 1.4 times dc rated voltage applied.

Measurements after exposure:

Insulation resistance.

Capacitance change: Not more than ±20 percent from initial measurement.

Life at +125°C: Method 108 of MIL-STD-202, test condition letter B.

Operating conditions: 1.4 times rated voltage applied.

Part number: See table I.

Source: https://assist.dla.mil -- Downloaded: 202640-23T08:07Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions and electrical characteristics.

Military part number	Capacitance (µF)	Dimension L (inches)	Rated voltage 1/ At 85°C	Rated voltage 1/ At 125°C	Rated current (A)	Insulation resistance (min) (megohms)	DC resistance (max) (ohms)	Insertion loss (nom) (dB) 50 kHz	100 kHz	150 kHz	300 kHz	1 MHz	10 MHz	1 GHz
M83439/02-001	2.1	.561 (14.25)	80 V dc	50 V dc	15	100	.004	26	30	36	42	52	65	70
M83439/02-002	.13	.464 (11.79)	250 V dc 125 V ac	200 V dc 125 V ac	15	1000	.004	3	6	11	17	28	48	70
M83439/02-003	.062	.658 (16.71)	400 V dc 220 V ac	400 V dc 125 V ac	15	1000	.004	1	3	6	11	21	41	70
(B) M83439/02-004	.33	.372 (9.45)	150 V dc	100 V dc	15	1000	.004	7	10	16	22	32	50	65

1/ AC ratings are to 400 Hz.

Custodian:
Air Force - 85

Review activities:
Air Force - 11, 99
DLA - ES

Agent:
DLA - ES

Preparing activity:
Air Force - 85

(Project 5910-F400)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:07Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:07Z
Check the source to verify that this is the current version before use.