
MILITARY SPECIFICATION SHEET


CAPACITORS, FIXED, FEED THROUGH, ELECTROMAGNETIC INTERFERENCE SUPPRESSION, (HERMETICALLY SEALED IN METAL CASES)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the capacitors described herein shall consist of this document and the latest issue of Specification MIL-C-83439.

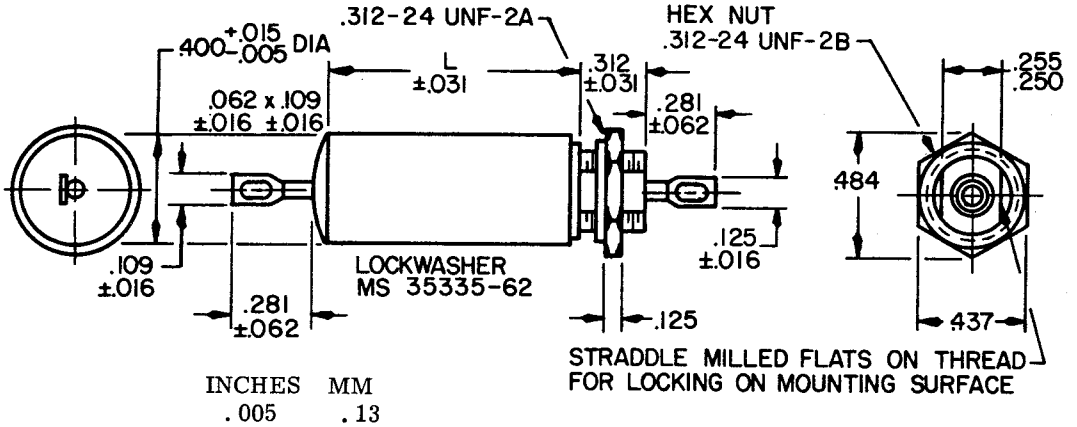

INCHES	MM
.005	.13
.015	.38
.016	.41
.031	.79
.062	1.57
.109	2.77
.125	3.18
.250	6.35
.255	6.48
.281	7.14
.312	7.92
.400	10.16
.437	11.10
.484	12.29



CIRCUIT CONFIGURATION

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Circuit diagram is for information only.
4. Mounting hardware (lockwasher and hex-nut) shall be supplied with capacitor.
5. Use of shoulder is optional.

FIGURE 1. Case dimensions and circuit configurations.

FSC 5910

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:07Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions and electrical characteristics.

Military part number	Capacitance (µF)	Capacitance tolerance (percent)	Rated voltage		Insulation resistance (megohm-microfarads)	DC resistance (max) (ohms)	Dimension L (inches)
			DC	AC 1/			
M83439/04-001	0.1	±20	400	250	50,000 2/	0.01	1.375
M83439/04-002	1.0	±10	50	30	100,000 3/	0.01	0.687

1/ Volts rms at 400 Hz at 85°C.
2/ Need not exceed 100,000.
3/ Need not exceed 200,000.

REQUIREMENTS:

Dimensions and configuration: See figure 1 and table I.

Material:
Case and terminals: Metal.
Finish: Corrosion-resistant.
Dielectric: Metallized polycarbonate.

Temperature range: -55° to +125°C.

Rated voltage: See table I.

Capacitance: See table I.
Test frequency: 1 kHz.

Capacitance tolerance: See table I.

Terminal strength: Method 211 of MIL-STD-202, test-condition letter A.
Pull: 3 pounds $^{+3}_{-0}$ ounces.

Insulation resistance: See table I.
Test potential: DC rated voltage.

Dissipation factor: 0.3 percent maximum at 25°C.

Insertion loss: MIL-STD-220.

Voltage drop: 0.01 volt, maximum.

Rated current: 10 amperes.

DC resistance: See table I.

Thermal shock: Test-condition letter D.

Immersion: Test-condition letter B.
Capacitance change: Not more than ±20 percent of initial measurement.

Vibration: Test-condition letter A.

Moisture resistance:
Polarization voltage: 100 Vdc.
Final measurements:
Capacitance change: Shall be not more than ±2 percent.
Dissipation factor: Shall not exceed 0.6 percent.
Insulation resistance: Shall be not less than 60 percent of initial value specified.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:07Z
Check the source to verify that this is the current version before use.

Life at +85°C: Not applicable.

Life at +125°C: Method 108 of MIL-STD-202, test-condition B.
Operating conditions: 1.4 times dc rated voltage (sample lot shall be 24 units).
Measurements after test:
Insulation resistance at 25°C: Shall be not less than 5,000 megohm farads or not less than 25,000 megohms.
Capacitance: Shall change not more than 2 percent of value specified in table I.
Dissipation factor: Shall be not more than 0.3 percent at 25°C.

Review activities:
Air Force - 11, 85
DSA - ES

Preparing activity:
Air Force - 11

Agent:
DSA - ES

(Project 5910-F243-4)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:07Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

C16061

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:07Z
Check the source to verify that this is the current version before use.