MILITARY SPECIFICATION SHEET

CIRCUIT BREAKERS, MAGNETIC, UNSEALED, TRIP-FREE, SINGLE POLE, AUXILIARY CONTACTS (0.2 to 50 AMPERES)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the circuit breakers described herein shall consist of this specification and the latest issue of MIL-C-55629.

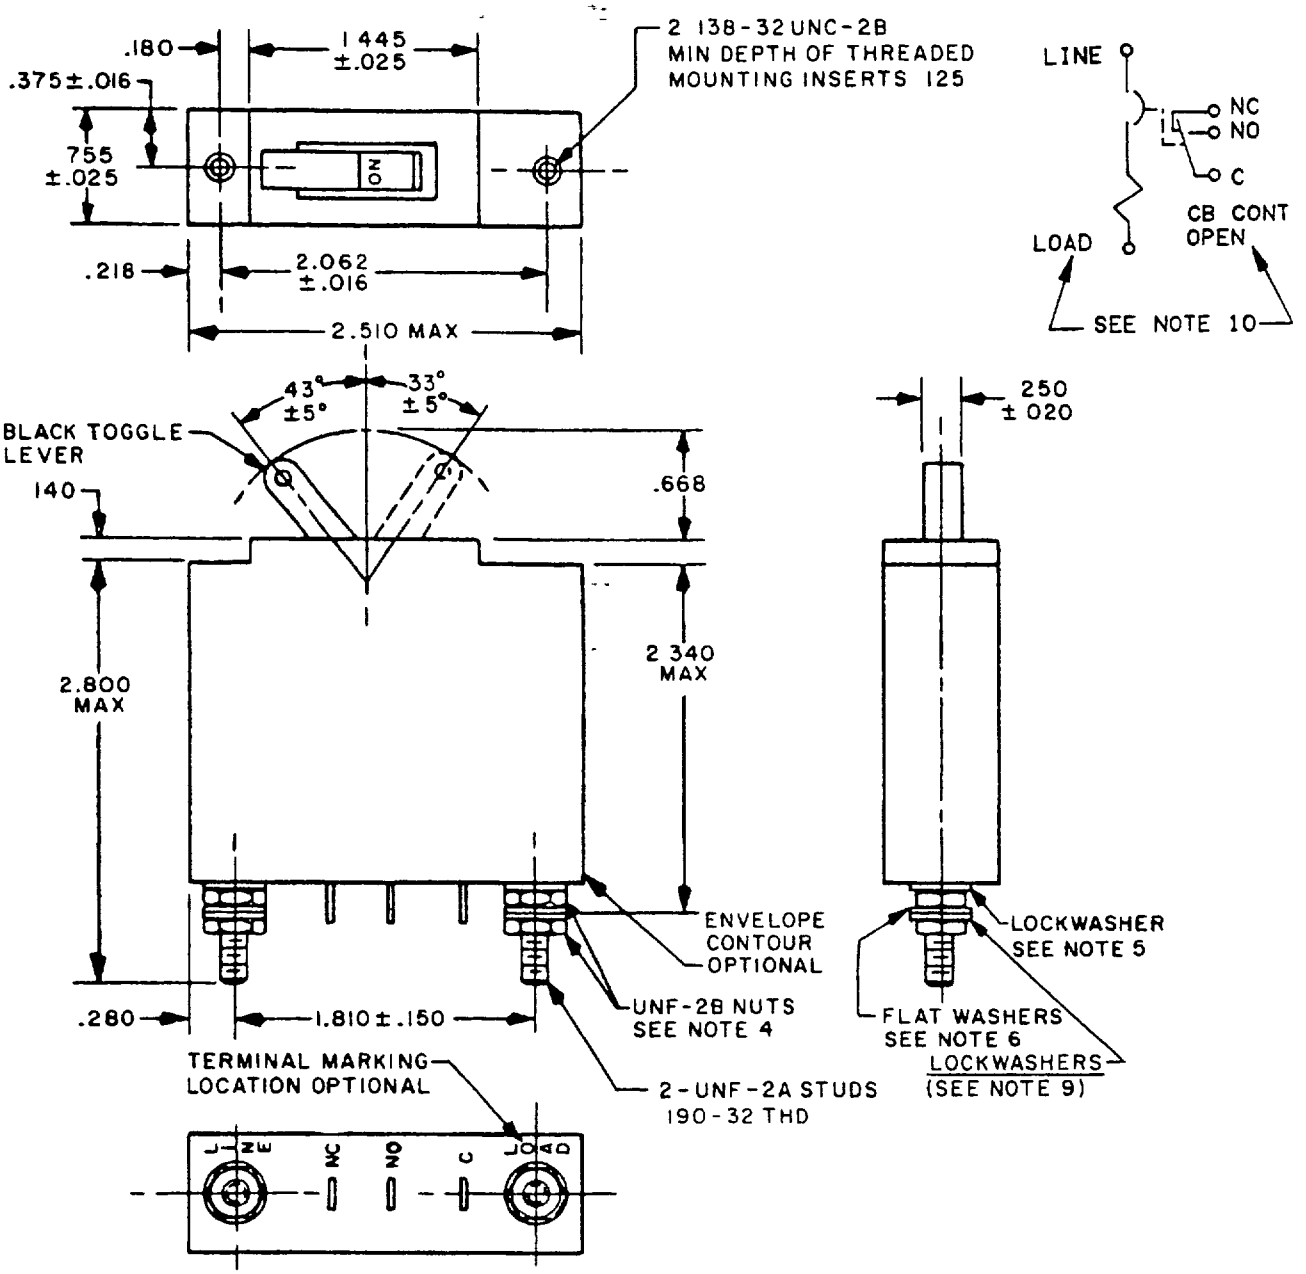


FIGURE 1. Dimensions and configurations.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:43Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.005	0.13	.138	3 50	281	7 14	1 445	36.70
.010	0.25	.140	3.56	.303	7.70	1.810	45.97
.016	0.41	150	3.81	.313	7.95	2.060	52.32
.020	0.51	.156	3.96	.368	9.35	2 062	52 37
.025	0.64	.180	4.58	.375	9.52	2.340	59.44
.031	0 79	.190	4.83	.378	9.60	2.510	63 75
.032	0.81	.204	5.18	.438	11.13	2.800	71.12
.035	0.89	.218	5.54	.500	12.70	3.125	79 38
.109	2.77	.250	6.35	.668	16 97		
.125	3.18	.280	7.11	.755	19.18		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only
3. Unless otherwise specified, tolerance is ±.031
4. NUT-HEX. 190 - 32 UNF-2B, 313/ 303 across flats, 109 ± 010 thick.
   Material - Brass (QQ-B-626), Tin plated (MIL-T-10727 type I) or Stainless Steel, for each terminal
5. Captive washer nut assembly of brass nut, bronze washer, tin plated, or lockwasher, internal or external tooth, MS35333-107 or MS35335-88 or equivalent
6. Washer, Flat: 378/.368 OD, 204/ 190 ID, 032 ± 005 thick
   Material - Brass (QQ-B-626) Tin plated (MIL-T-10727 type I) or Phosphor Bronze, composition (QQ-B-750).
7. Auxiliary contact terminals shall provide for soldered connections and shall be located on the back side of the circuit breaker (same surface as main terminals) otherwise location, style and design are optional
8. When panel sealing is required, boots shall be in accordance with MIL-B-5423/14-05
9. Lockwasher, Split MS35338-138 or equivalent.
10. Physical item marking of the words "LOAD" and "CB CONT OPEN" is optional

FIGURE 1. Dimensions and configurations - Continued

Source: https://assist.dla.mil -- Downloaded: 202640-22T23:43Z
Check the source to verify that this is the currentversion before use.

REQUIREMENTS.

Dimensions and configuration. See figure 1.

Current ratings. See table I.

Voltage ratings. See tables II through V. 240 V ac breakers are designed also for use at 120 V ac

Tripping-time delays: See tables II through V.

High inrush. Applicable to time delays K, L, M, N, P, R, and S.

Terminal and mounting hardware See figure 1.

Terminals. See figure 1.

Auxiliary contact terminals.

Contact capacity shall be 10 amperes to 250 volts 60/400 Hz and 2 amperes resistive, 1 ampere inductive to 50 V dc.

Actuator strength· 25 pounds.

Actuator operating force 4 pounds, maximum.

Terminal strength.

Applied load. 30 pounds.
Applied torque 22 pound-inches.

Vibration. Energized current shall be 90 percent for characteristics H, I, and J.

Shock Energized current shall be 90 percent for characteristics H, I, and J.

Interrupting capacities

2,000 amperes at 50 V dc.
2,000 amperes at 120 V ac, 60 Hz.
1,500 amperes at 120 V ac, 400 Hz.
1,000 amperes at 240 V ac, 60 and 400 Hz.

Part number M55629/2- (dash number from table I).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:43Z
Check the source to verify that this is the current version before use.

TABLE I. Circuit breaker dash numbers and applicable characteristics.

Dash no.	Current rating (amperes)	Voltage frequency and tripping time delay code letter (see table II, III, or V)	Resistance or impedance ohms (max)	Dash no.	Current rating (amperes)	Voltage frequency and tripping time delay code letter (see table II, III, or V)	Resistance or impedance ohms (max)
001	0.2	A	32	152	0.75	H	3
002	"	B	32	155	"	I	3
003	"	C	34	159	"	J	7
004	"	D	34	272	"	K	3
005	"	E	72	273	"	L	3
006	"	F	72	274	"	M	3
007	"	G	72	275	"	N	3
134	"	H	32	276	"	P	7
135	"	I	34	277	"	R	7
136	"	J	72	278	"	S	7
251	"	K	32	429	"	T	3
252	"	L	32	015	1.0	A	2
253	"	M	34	016	"	B	2
254	"	N	34	017	"	C	2
255	"	P	72	018	"	D	2
256	"	R	72	019	"	E	4
257	"	S	72	020	"	F	4
426	"	T	34	021	"	G	4
137	0.25	A	21	160	"	H	2
138	"	B	21	161	"	I	2
140	"	C	23	162	"	J	4
141	"	D	23	279	"	K	2
143	"	E	43	280	"	L	2
144	"	F	43	281	"	M	2
145	"	G	43	282	"	N	2
139	"	H	21	283	"	P	4
142	"	I	23	284	"	R	4
146	"	J	43	285	"	S	4
258	"	K	21	430	"	T	2
259	"	L	21	163	1.5	A	.9
260	"	M	23	164	"	B	.9
261	"	N	23	166	"	C	.9
262	"	P	43	167	"	D	.9
263	"	R	43	169	"	E	2
264	"	S	43	170	"	F	2
427	"	T	23	171	"	G	2
008	0.5	A	6	165	"	H	.9
009	"	B	6	168	"	I	.9
010	"	C	6	172	"	J	2
011	"	D	6	286	"	K	.9
012	"	E	12	287	"	L	.9
013	"	F	12	288	"	M	.9
014	"	G	12	289	"	N	.9
147	"	H	6	290	"	P	2
148	"	I	6	291	"	R	2
149	"	J	12	292	"	S	2
265	"	K	6	431	"	T	.9
266	"	L	6	022	2.0	A	.5
267	"	M	6	023	"	B	.5
268	"	N	6	024	"	C	.5
269	"	P	12	025	"	D	.5
270	"	R	12	026	"	E	.8
271	"	S	12	027	"	F	.8
428	"	T	6	028	"	G	.8
150	0.75	A	3	173	"	H	5
151	"	B	3	174	"	I	.5
153	"	C	3	175	"	J	.8
154	"	D	3	293	"	K	.5
156	"	E	7	294	"	L	.5
157	"	F	7	295	"	M	.5
158	"	G	7	296	"	N	.5

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:43Z
Check the source to verify that this is the current version before use.

TABLE I. Circuit breaker dash numbers and applicable characteristics - Continued.

Dash no.	Current rating (amperes)	Voltage frequency and tripping time delay code letter (see table II, III, or V)	Resistance or impedance ohms (max)	Dash no.	Current rating (amperes)	Voltage frequency and tripping time delay code letter (see table II, III, or V)	Resistance or impedance ohms (max)
297	2.0	P	.8	040	4.0	E	.3
298	"	R	.8	041	"	F	.3
299	"	S	.8	042	"	G	.3
432	"	T	.5	199	"	H	.1
176	2.5	A	.35	200	"	I	.1
177	"	B	.35	201	"	J	.3
179	"	C	.35	321	"	K	.1
180	"	D	.35	322	"	L	.1
182	"	E	.6	323	"	M	.1
183	"	F	.6	324	"	N	.1
184	"	G	.6	325	"	P	.3
178	"	H	.35	326	"	R	.3
181	"	I	.35	327	"	S	.3
185	"	J	.6	436	"	T	.1
300	"	K	.35	043	5.0	A	.08
301	"	L	.35	044	"	B	.08
302	"	M	.35	045	"	C	.08
303	"	N	.35	046	"	D	.08
304	"	P	.6	047	"	E	.15
305	"	R	.6	048	"	F	.15
306	"	S	.6	049	"	G	.15
433	"	T	.35	202	"	H	.08
029	3.0	A	.3	203	"	I	.08
030	"	B	.3	204	"	J	.15
031	"	C	.3	328	"	K	.08
032	"	D	.3	329	"	L	.08
033	"	E	.5	330	"	M	.08
034	"	F	.5	331	"	N	.08
035	"	G	.5	332	"	P	.15
186	"	H	.3	333	"	R	.15
187	"	I	.3	334	"	S	.15
188	"	J	.5	437	"	T	.08
307	"	K	.3	050	6.0	A	.06
308	"	L	.3	051	"	B	.06
309	"	M	.3	052	"	C	.06
310	"	N	.3	053	"	D	.06
311	"	P	.5	054	"	E	.08
312	"	R	.5	055	"	F	.08
313	"	S	.5	056	"	G	.08
434	"	T	.3	205	"	H	.06
189	3.5	A	.15	206	"	I	.06
190	"	B	.15	207	"	J	.08
192	"	C	.15	335	"	K	.06
193	"	D	.15	336	"	L	.06
195	"	E	.35	337	"	M	.06
196	"	F	.35	338	"	N	.06
197	"	G	.35	339	"	P	.08
191	"	H	.15	340	"	R	.08
194	"	I	.15	341	"	S	.08
198	"	J	.35	438	"	T	.06
314	"	K	.15	057	7.0	A	.04
315	"	L	.15	058	"	B	.04
316	"	M	.15	059	"	C	.04
317	"	N	.15	060	"	D	.04
318	"	P	.35	061	"	E	.07
319	"	R	.35	062	"	F	.07
320	"	S	.35	063	"	G	.07
435	"	T	.15	208	"	H	.04
036	4.0	A	.1	209	"	I	.04
037	"	B	.1	210	"	J	.07
038	"	C	.1	342	"	K	.04
039	"	D	.1				

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:43Z
Check the source to verify that this is the current version before use.

TABLE I. Circuit breaker dash numbers and applicable characteristics - Continued.

Dash no.	Current rating (amperes)	Voltage frequency and tripping time delay code letter (see table II, III, or V)	Resistance or impedance ohms (max)	Dash no.	Current rating (amperes)	Voltage frequency and tripping time delay code letter (see table II, III, or V)	Resistance or impedance ohms (max)
343	7.0	L	.04	085	12.5	A	.013
344	"	M	.04	086	"	B	.013
345	"	N	.04	087	"	C	.015
346	"	P	.07	088	"	D	.015
347	"	R	.07	089	"	E	.03
348	"	S	.07	090	"	F	.03
439	"	T	.04	091	"	G	.03
064	8.0	A	.03	220	"	H	.013
065	"	B	.03	221	"	I	.013
066	"	C	.03	222	"	J	.03
067	"	D	.03	370	"	K	.013
068	"	E	.06	371	"	L	.013
069	"	F	.06	372	"	M	.015
070	"	G	.06	373	"	N	.015
211	"	H	.03	374	"	P	.03
212	"	I	.03	375	"	R	.03
213	"	J	.06	376	"	S	.03
349	"	K	.03	443	"	T	.015
350	"	L	.03	092	15.0	A	.01
351	"	M	.03	093	"	B	.01
352	"	N	.03	094	"	C	.011
353	"	P	.06	095	"	D	.011
354	"	R	.06	096	"	E	.02
355	"	S	.06	097	"	F	.02
440	"	T	.03	098	"	G	.02
071	9.0	A	.018	223	"	H	.013
072	"	B	.018	224	"	I	.015
073	"	C	.02	225	"	J	.03
074	"	D	.02	377	"	K	01
075	"	E	.05	378	"	L	.01
076	"	F	.05	379	"	M	.011
077	"	G	.05	380	"	N	.011
214	"	H	.02	381	"	P	.02
215	"	I	.02	382	"	R	.02
216	"	J	.05	383	"	S	.02
356	"	K	.018	444	"	T	.011
357	"	L	.018	099	20.0	A	.007
358	"	M	.02	100	"	B	.007
359	"	N	.02	101	"	C	007
360	"	P	.05	102	"	D	.007
361	"	R	.05	103	"	E	.01
362	"	S	.05	104	"	F	.01
441	"	T	.02	105	"	G	.01
078	10.0	A	.02	226	"	H	.007
079	"	B	.02	227	"	I	.007
080	"	C	.02	228	"	J	.01
081	"	D	.02	384	"	K	.007
082	"	E	.04	385	"	L	.007
083	"	F	.04	386	"	M	.007
084	"	G	.04	387	"	N	.007
217	"	H	.02	388	"	P	.01
218	"	I	.02	389	"	R	.01
219	"	J	.04	390	"	S	.01
363	"	K	.02	445	"	T	.007
364	"	L	.02	106	25.0	A	.006
365	"	M	.02	107	"	B	.006
366	"	N	.02	108	"	C	.006
367	"	P	.04	109	"	D	.006
368	"	R	.04	110	"	E	.007
369	"	S	.04	111	"	F	.007
442	"	T	.02				

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:43Z
Check the source to verify that this is the current version before use.

TABLE I. Circuit breaker dash numbers and applicable characteristics - Continued.

Dash no.	Current rating (amperes)	Voltage frequency and tripping time delay code letter (see table II, III, or V)	Resistance or impedance ohms (max)	Dash no.	Current rating (amperes)	Voltage frequency and tripping time delay code letter (see table II, III, or V)	Resistance or impedance ohms (max)
112	25.0	G	.007	407	35.0	M	.004
229	"	H	.006	408	"	N	.004
230	"	I	.006	409	"	P	.005
231	"	J	007	410	"	R	.005
391	"	K	.006	411	"	S	.005
392	"	L	.006	448	"	T	.004
393	"	M	.006	238	40.0	A	.0038
394	"	N	.006	239	"	B	.0038
395	"	P	.007	241	"	C	.0038
396	"	R	.007	242	"	D	.0038
397	"	S	.007	244	"	E	.0052
446	"	T	.006	245	"	F	.0052
113	30.0	A	.005	246	"	G	.0052
114	"	B	.005	240	"	H	.0038
115	"	C	.005	243	"	I	.0038
116	"	D	.005	247	"	J	.0052
117	"	E	.006	412	"	K	.0038
118	"	F	006	413	"	L	.0038
119	"	G	.006	414	"	M	.0038
232	"	H	.005	415	"	N	.0038
233	"	I	.005	416	"	P	.0052
234	"	J	.006	417	"	R	.0052
398	"	K	.005	418	"	S	.0052
399	"	L	.005	449	"	T	.0038
400	"	M	005	127	50.0	A	.003
401	"	N	.005	128	"	B	.003
402	"	P	.006	129	"	C	.003
403	"	R	.006	130	"	D	.003
404	"	S	.006	131	"	E	.004
447	"	T	.005	132	"	F	.004
120	35.0	A	.004	133	"	G	.004
121	"	B	.004	248	"	H	.003
122	"	C	.004	249	"	I	.003
123	"	D	.004	250	"	J	.004
124	"	E	.005	419	"	K	.003
125	"	F	.005	420	"	L	.003
126	"	G	.005	421	"	M	.003
235	"	H	.004	422	"	N	.003
236	"	I	.004	423	"	P	.004
237	"	J	.005	424	"	R	.004
405	"	K	.004	425	"	S	.004
406	"	L	.004	450	"	T	.003

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:43Z
Check the source to verify that this is the current version before use.

TABLE II. Tripping-time, standard delay. 1/ 2/

Tripping-time delay at 25°C ±2°C (tripping time in seconds)														
Time delay percent rated current	50 V dc				240 V 60 Hz				240 V 400 delay					
	A		B		C		D		E		F		G	
	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min
100	no trip one hour		no trip one hour		no trip one hour		no trip one hour		no trip one hour		no trip one hour		no trip one hour	
125	70	7	7	.5	120	10	17	.7	---	---	---	---	---	---
150	---	---	---	---	---	---	---	---	60	5	5.8	.50	400	40
200	8	.6	1.4	.13	20	2.2	1.6	.13	20	2.1	1.9	.15	150	9.5
400	1.5	.15	.25	.031	2.3	.3	.25	.03	3.4	.4	.19	.02	19	1.9
600	.5	Inst	.12	Inst	.75	Inst	.13	Inst	.19	Inst	.08	Inst	1.6	Inst
800	.051	Inst	.051	Inst	.16	Inst	.07	Inst	.06	Inst	.05	Inst	.4	Inst
1,000	.026	Inst	.026	Inst	.04	Inst	.04	Inst	.045	Inst	.036	Inst	.043	Inst

See footnotes at end of table V.

TABLE III. Tripping-time, high-inrush design. 1/ 3/

Tripping-time delay at 25°C ±2°C (tripping time in seconds)														
Time delay percent rated current	50 V dc				240 V 60 Hz						240 V 400 Hz			
	K		L		M		N		T		P		R		S	
	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min
100	no trip one hour		no trip one hour		no trip one hour		no trip one hour		no trip one hour		no trip one hour		no trip one hour		no trip one hour	
125	100	10	12	.5	120	10	18	1	700	50	---	---	---	---	---	---
150	---	---	---	---	---	---	---	---	350	32	60	6	5.8	.6	500	60
200	20	2.5	1.5	.13	20	3	1.6	.16	70	10	20	2.1	2	.2	160	20
400	2	.36	.29	.031	2.3	.3	.3	.04	15	1.5	4	.4	.35	.035	19	2
600	1	.13	.15	Inst	1	.13	.17	Inst	7	.7	.6	Inst	.125	Inst	3.5	.250
800	.6	Inst	.06	Inst	.6	Inst	.09	Inst	3	.1	.06	Inst	.05	Inst	.5	.025
1,000	.29	Inst	.05	Inst	.29	Inst	.043	Inst	2	.01	.045	Inst	.036	Inst	.043	Inst
1,800 4/	no trip		no trip		no trip		no trip		no trip		no trip		no trip		no trip	

See footnotes at end of table V.

Source: https://assist.dla.mil -- Downloaded: 202610-22T23:43Z
Check the source to verify that this is the current version before use.

TABLE IV. Tripping-time at high-low temperature, high-inrush and standard delays. 1/

Tripping-time delay at high and low temperature °C (tripping time in seconds) 5/																		
Time delay percent rated current	50 V dc				240 V 60 Hz						240 V 400 Hz							
	A and P		B and L		C and M		D and N		T		E and P		F and R		G and S			
	-40° Max	+85° Min	-40° Max	+85° Min	-40° Max	+85° Min	-40° Max	+85° Min	-40° Max	+85° Min	-40° Max	+85° Min	-40° Max	+85° Min	-40° Max	+85° Min		
100	no trip one hour		no trip one hour		no trip one hour		no trip one hour				no trip one hour		no trip one hour		no trip one hour			
125	500	5	100	.1	500	1	100	.1	8000	25	---	---	---	---	---	---		
150	---	---	---	---	---	---	---	---	900	12	500	.5	100	.1	1500	5		
200	100	.1	10	.05	100	.05	10	.05	500	5	100	.1	10	.5	500	.5		
400	20	Inst	3	Inst	20	Inst	3	Inst	100	.8	20	Inst	3	Inst	100	Inst		
600	5	Inst	1	Inst	5	Inst	1	Inst	40	.1	6	Inst	1	Inst	5	Inst		
800	2	Inst	.5	Inst	.5	Inst	.5	Inst	10	.05	.5	Inst	.5	Inst	.5	Inst		
1,000	---	---	---	---	---	---	---	---	3	01	---	---	---	---	---	---		

See footnotes at end of table V.

TABLE V. Tripping-time, standard nondelay. 1/ 2/

Tripping-time delay at -40°C ±2°C, +25°C ±2°C, and +85°C ±2°C (tripping time in seconds)						
Time delay rated current	50 V dc		240 V 60 Hz		240 V 400 Hz	
	H (nondelay)		I (nondelay)		J (nondelay)	
	Max	Min	Max	Min	Max	Min
100	no trip one hour		no trip one hour		no trip one hour	
125	0.15	Inst	0.15	Inst	---	---
150	---	---	---	---	0.15	Inst
200	0.07	Inst	0.15	Inst	0.070	Inst
400	0.032	Inst	0.02	Inst	0.032	Inst
600	0.02	Inst	0.017	Inst	0.020	Inst
800	0.02	Inst	0.017	Inst	0.020	Inst

1/ Circuit breakers shall not trip at 100 percent rated current. Characteristics A, B, C, D, H, I, K, L, M, and N must trip at 125 percent rated current, E, F, G, J, P, R, and S at 150 percent. Any characteristic may trip between 100 percent and the must-trip value. Instantaneous (Inst) is defined as less than 15 milliseconds.

2/ Voltage, frequency, and tripping-time delay codes A, B, C, D, E, F, G, H, I, and J are standard delays without the high-inrush feature.

3/ Voltage, frequency, and tripping-time delay codes K, L, M, N, P, R, and S incorporate the high-inrush or transient suppression feature.

4/ High-inrush test shall be performed using one alternation which has a peak value of 1,800 percent of rated current. 400 Hz and dc delays are subjected to a 400 Hz waveform, 60 Hz delays shall be subjected to a 60 Hz waveform.

5/ High and low test temperature tolerances are ±2°C.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:43Z
Check the source to verify that this is the current version before use.

Circuit breakers covered by this specification sheet are substitutable for the manufacturer's part numbers as shown in table VI. This information in no way implies that the manufacturer's part number is substitutable for the military part number.

TABLE VI. Supersession and substitution data.

Superseding military part number	Superseded manufacturers part number	
	FSCM 81541	FSCM 74193
	Type APL-1 UPL-1	Type AMI
M55629/2-XXX	The complete part number consists of the type (above) plus identification codes for comparable internal connections, auxiliary switch, voltage, frequency, time delay, and current rating. UL recognition and moisture fungus proofing is also superseded by the military circuit breakers.	

NOTE. Revision letters are not used to denote changes due to the extensiveness of the changes.

Custodians.
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - ME, MI
Navy - AS, OS
Air Force - 17, 99
DLA - ES

User activities:
Army - AV
Navy - MC
Air Force - 19

Preparing activity
Army - ER

Agent:
DLA - ES

(Project 5925-0163-2)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:43Z
Check the source to verify that this is the current version before use.