THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION FF-S-86

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE

Form Approved
OMB No 0704-0188

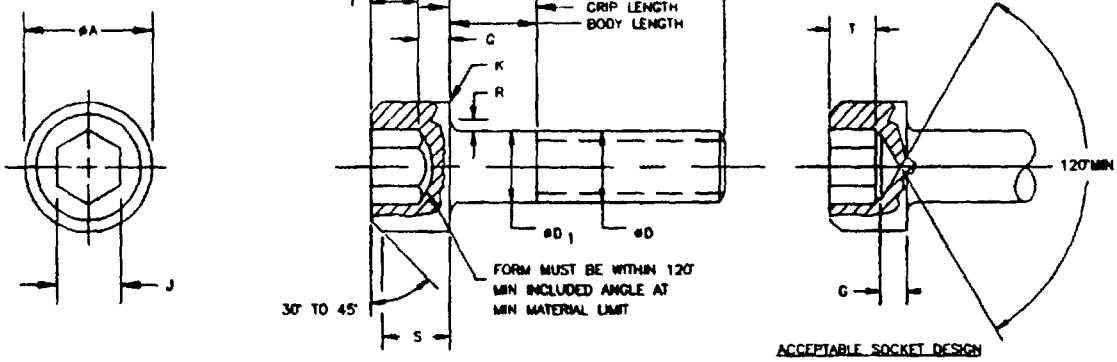


TABLE I DASH NUMBERS AND DIMENSIONS

D NOMINAL SIZE		#0 060	#10 190	1/4 250	5/16 3125	3/8 375
THREADS PER INCH		80 UNF-3A	32 UNF-3A	28 UNF-3A	24 UNF-3A	24 UNF-3A
øD1 BODY	MAX	0600	1900	2500	.3125	3750
	MIN	0568	1840	2435	3053	3678
øA HEAD	MAX	096	313	375	469	563
	MIN	091	303	365	457	550
H HEAD HEIGHT	MAX	060	190	250	313	375
	MIN	057	185	244	306	368
S HEAD SIZE HEIGHT	MIN	054	171	225	281	337
J SOCKET WIDTH ACROSS FLATS	MAX	0510	1587	1900	2530	3160
	MIN	0500	1562	1875	2500	3125
T KEY ENGAGEMENT	MIN	025	090	120	151	182
G WALL THICKNESS	MIN	020	065	095	119	143
K CHAMFER OR RADIUS	MAX	003	005	008	008	008
R FILLET RADIUS	MAX	007	014	014	017	020
	MIN	003	009	009	015	015
M BASIC THREAD LENGTH	REF	500	875	1 000	1 125	1 250
MIN TENSILE STRENGTH LOAD LBS 1/		140	1 600	2 910	4 640	7 020

L LENGTH	TOLERANCE	DASH NO	GRIP LENGTH MAX	BODY LENGTH MIN	DASH NO	GRIP LENGTH MAX	BODY LENGTH MIN	DASH NO	GRIP LENGTH MAX	BODY LENGTH MIN	DASH NO	GRIP LENGTH MAX	BODY LENGTH MIN	DASH NO	GRIP LENGTH MAX	BODY LENGTH MIN
125		1														
188		2														
250		3														
375		4			9											
500	+ 000 - 030				10			21								
625					11			22								
750					12			23			31			39		
875					13											
1 000					14			24			32			40		
1 250	+ 000 - 040				15	375	167	25			33			41		
1 500					16	375	167	26	500	250	34			42		

1/ BASED ON 80,000 PSI MINIMUM TENSILE STRENGTH, LOAD POUNDS ARE CALCULATED BY THE AREAS IN ACCORDANCE WITH FED-STD-H28/2

(F) DENOTES CHANGES

INCH-POUND

PREPARING ACTIVITY DLA-IS
CUSTODIANS ARMY- AR NAVY- OS
AIR FORCE- 99 DLA-
REVIEW
USER
PROJECT NUMBER 5305-2024

MILITARY SPECIFICATION SHEET
TITLE
SCREW, CAP, SOCKET HEAD-HEXAGON, CORROSION RESISTANT STEEL, UNF-3A

SPECIFICATION SHEET NUMBER
MS16996 24 NOV 93 REV F
SUPERSEDING
MS16996E 28 SEPT 1988
AMSC- N/A FSC 5305

DISTRIBUTION STATEMENT
A. Approved for public release distribution is unlimited.

DD Form 672, MAY 88 PREVIOUS EDITIONS ARE OBSOLETE PROPOSED

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:02Z
Check the source to verify that this is the current version before use.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION FF-S-86

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE

Form Approved
OMB No 0704-0188

REQUIREMENTS

1 MATERIAL. CORROSION RESISTANT STEEL TYPES 302 (UNS S30200) 303 (UNS S30300) 304 (UNS S30400) 302HQ (UNS S30430), 305 (UNS S30500) AND 316 (UNS S31600) IN ACCORDANCE WITH PROCUREMENT SPECIFICATION

(F) 2 CLEANED, DESCALED AND PASSIVATED: SCREWS SHALL BE CLEANED DESCALED AND PASSIVATED IN ACCORDANCE WITH QQ-P-35

3 PROTECTIVE COATING AND SURFACE TREATMENT. WHEN SPECIFIED, SCREWS SHALL BE BLACK OXIDE COATED IN ACCORDANCE WITH MIL-C-13924 CLASS 4 (WHEN BLACK OXIDE COATING IS REQUIRED, THE DASH NUMBER SHALL BE FOLLOWED BY A CODE LETTER "B")


4 MAGNETIC PERMEABILITY. THESE SCREWS HAVE A MAGNETIC PERMEABILTY OF 2.0 MAXIMUM (AIR = 1.0) FOR A FIELD STRENGTH OF H = 200 OERSTEDS USING A MAGNETIC INDICATOR IN ACCORDANCE WITH MIL-I-17214

5 THREADS. THREADS SHALL BE IN ACCORDANCE WITH FED-STD-H28/2 ACCEPTABILITY OF SCREW THREADS SHALL BE IN ACCORDANCE WITH FED-STD-H28/20 SYSTEM 22 ACCEPTABILITY OF SCREW THREADS FOR SIZES 060 (#0) AND 190 (#10) SHALL BE IN ACCORDANCE WITH FED-STD-H28/20 SYSTEM 21 SCREWS ABOVE HEAVY LINE SHALL HAVE COMPLETE (FULL FORM) THREADS EXTENDING TO WITHIN TWO THREADS OF THE HEAD

6 HEAD STYLE. HEAD OF SCREW MAY BE KNURLED OR NOT KNURLED AT THE OPTION OF THE MANUFACTURER TYPE OF KNURLING OPTIONAL

7 SOURCE MARKING IDENTIFICATION. SCREWS WITH NOMINAL SIZES 250 AND LARGER SHALL BE MARKED TO IDENTIFY THE SOURCE ACCEPTING RESPONSIBILITY FOR THE SCREW MEETING THE REQUIREMENTS SPECIFIED HEREIN THE MARKING SHALL BE A SOURCE IDENTIFICATION SYMBOL OR CAGE (COMMERCIAL AND GOVERNMENT ENTITY) CODE THE MARKING SHALL BE DEPRESSED AND OPTIONALLY LOCATED ON THE TOP OR SIDE OF THE SCREW HEAD

8 PART NUMBER. PART NUMBER SHALL CONSIST OF THE BASIC MS NUMBER FOLLOWED BY A DASH NUMBER FROM TABLE I AND A CODE LETTER "B" FROM BLACK OXIDE IF APPLICABLE

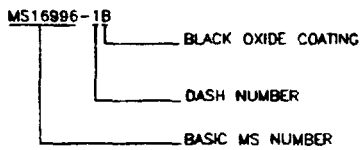

MS16996-1B INDICATES – SCREW CAP SOCKET HEAD HEXAGON, CORROSION RESISTANT STEEL, UNF-3A, 060-80 UNF-3A NOMINAL THREAD SIZE .125 LENGTH, BLACK OXIDE COATING

NOTES

1 ALL DIMENSIONS ARE IN INCHES

2 THE BASIC THREAD LENGTH "M" (TABLE 1) IS A REFERENCED VALUE CONTROLLED BY THE GRIP LENGTH AND "L" LENGTH AS SPECIFIED

3 IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE

4 REFERENCED GOVERNMENT (OR NON-GOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DODISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN

PREPARING ACTIVITY DLA-IS
CUSTODIANS ARMY- AR NAVY- OS
AIR FORCE- 99 DLA-
REVIEW
USER
PROJECT NUMBER 5305-2024

MILITARY SPECIFICATION SHEET
TITLE
SCREW, CAP SOCKET HEAD-HEXAGON
CORROSION RESISTANT STEEL, UNF-3A

SPECIFICATION SHEET NUMBER 24 NOV 95
MS16996 REV F
SUPERSEDING
MS16996E 28 SEPT 1988
AMSC- N/A FSC 5305

DISTRIBUTION STATEMENT
A Approved for public release distribution is unlimited

DD Form 672, MAY 88 PREVIOUS EDITIONS ARE OBSOLETE PROPOSED

Source: https://assist.dla.mil - Downloaded: 2026-10-23T14:02Z
Check the source to verify that this is the current version before use.