INCH-POUND

MS17345E
26 October 2005
SUPERSEDING
MS17345D
12 August1987

DETAIL SPECIFICATION SHEET

CONNECTOR, PLUG, ELECTRICAL, CABLE CONNECTING, FEMALE

This specification is approved for use by all Departments
and Agencies of the Department of Defense

The requirements for acquiring the product described herein
shall consist of this specification sheet and MIL-DTL-22992.

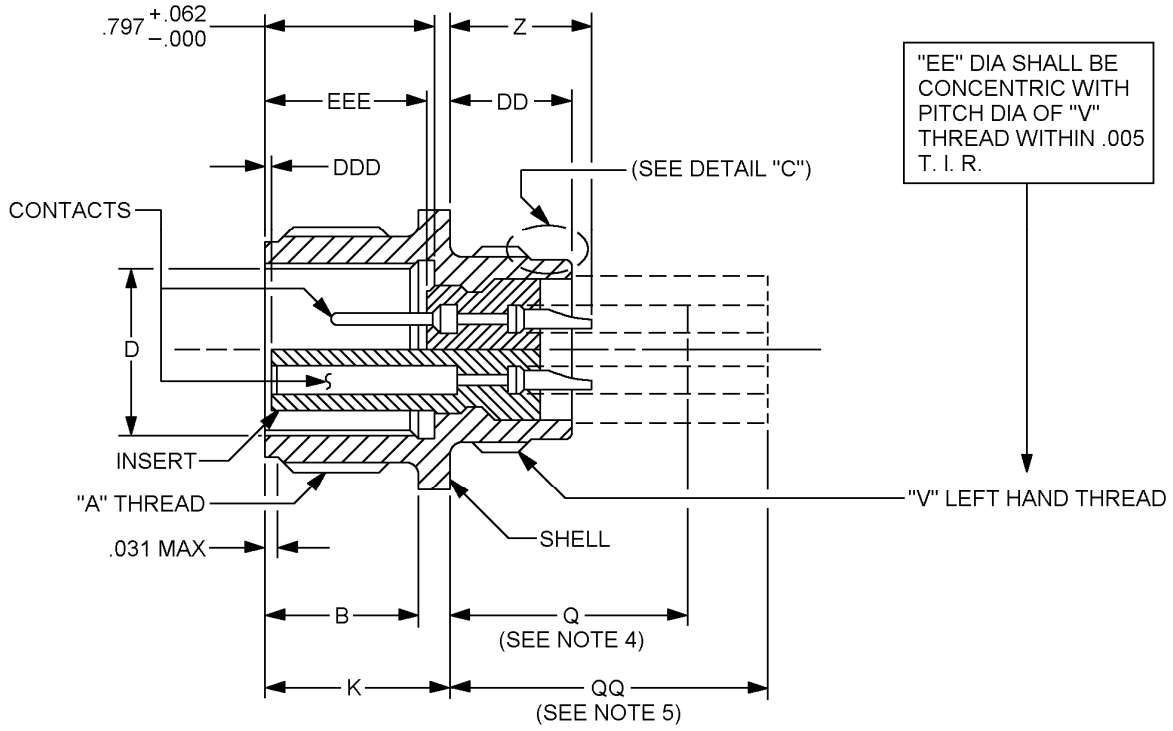



FIGURE 1. Dimensions and configuration.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:07Z
Check the source to verify that this is the current version before use.

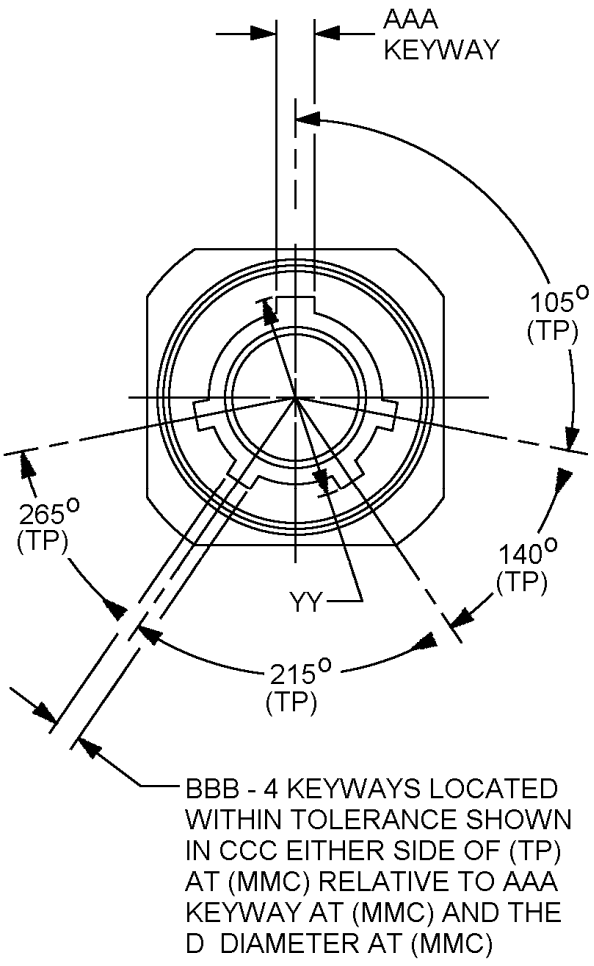



FIGURE 1. Dimensions and configuration - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:07Z
Check the source to verify that this is the current version before use.


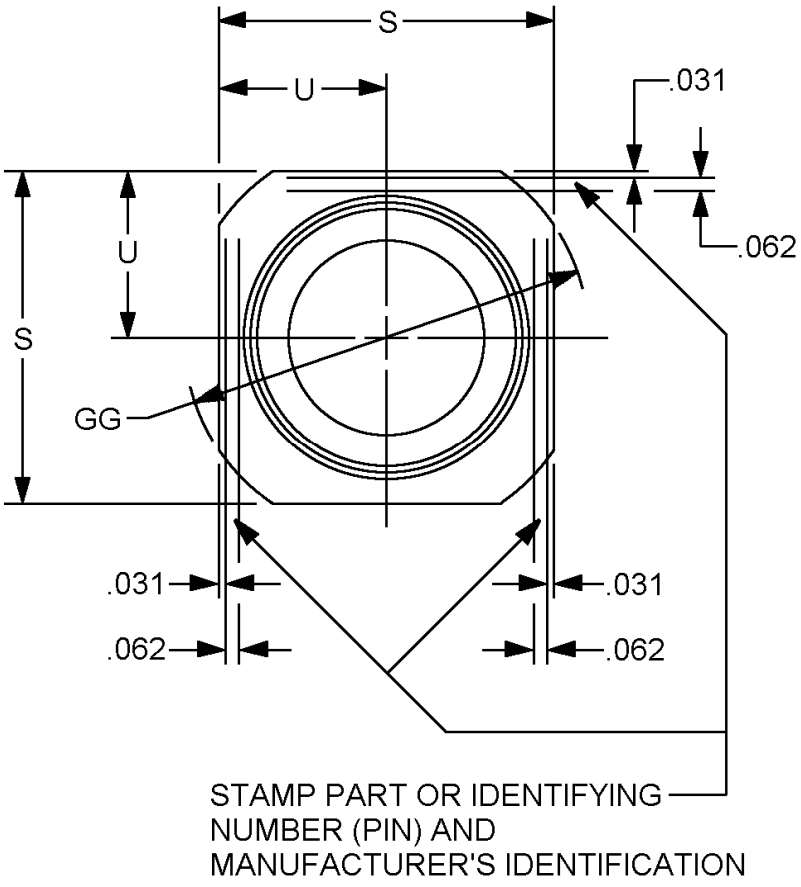



FIGURE 1. Dimensions and configuration - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:07Z
Check the source to verify that this is the current version before use.

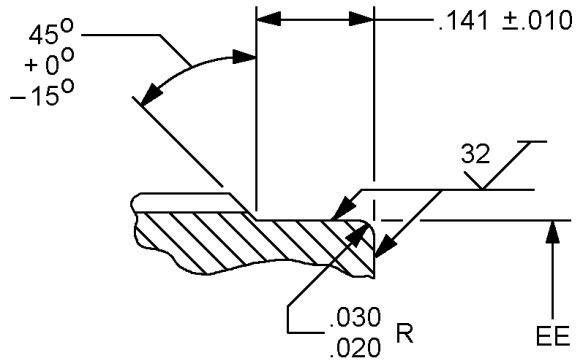


DETAIL "C"

| Size | A<br>Thread (plated) class 2A | B<br>+ .016<br>- .000 | D<br>Dia<br>+ .005<br>- .010 | K<br>+ .021<br>- .020 |
|---|---|---|---|---|
| 12 | 0.8750-0.1P-0.2L-DS | .688 | .567 | .938 |
| 14 | 1.0000-0.1P-0.2L-DS | | .692 | |
| 16 | 1.1250-0.1P-0.2L-DS | | .817 | |
| 18 | 1.2500-0.1P-0.2L-DS | .703 | .942 | .953 |
| 20 | 1.3750-0.1P-0.2L-DS | | 1.068 | |
| 22 | 1.5000-0.1P-0.2L-DS | | 1.192 | |
| 24 | 1.7500-0.1P-0.2L-DS | .766 | 1.016 | .977 |
| 28 | 2.0000-0.1P-0.2L-DS | | 1.536 | 1.016 |
| 32 | 2.2500-0.1P-0.2L-DS | .703 | 1.786 | 1.078 |
| 36 | 2.5000-0.1P-0.2L-DS | | 2.005 | |
| 40 | 2.7500-0.1P-0.2L-DS | | 2.255 | |
| 44 | 3.0000-0.1P-0.2L-DS | | 2.545 | |

FIGURE 1. Dimensions and configuration - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:07Z
Check the source to verify that this is the current version before use.

| Size | Q<br>Max. | QQ<br>Max. | S<br>+ .021<br>- .020 | U<br>± .010 | V<br>Thread (plated)<br>class 2A LH |
|---|---|---|---|---|---|
| 12 | 1.055 | -- | 1.000 | .500 | .7500-20 UNEF |
| 14 | | 1.605 | 1.094 | .547 | .8750-20 UNEF |
| 16 | | | 1.281 | .641 | 1.0000-20 UNEF |
| 18 | 1.040 | 1.590 | 1.375 | .688 | 1.1250-18 NEF |
| 20 | | | 1.500 | .750 | 1.2500-18 NEF |
| 22 | | | 1.625 | .812 | 1.3750-18 NEF |
| 24 | 1.527 | 1.875 | 1.875 | .938 | 1.6250-18 NEF |
| 28 | .977 | 1.527 | 2.125 | 1.062 | 1.8750-16 UN |
| 32 | .915 | 1.465 | 2.375 | 1.188 | 2.0625-16 N |
| 36 | | | 2.625 | 1.312 | 2.3125-16 N |
| 40 | | | 3.000 | 1.500 | 2.6250-16 UN |
| 44 | NA | NA | 3.250 | 1.625 | 2.8750-16 UN |

FIGURE 1. Dimensions and configuration - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:07Z
Check the source to verify that this is the current version before use.

| Size | DD ± .010 | EE dia + .001 - .007 | GG dia. | YY dia + .010 - .006 | AAA | BBB |
|---|---|---|---|---|---|---|
| 12 | .641 | .672 | 1.250 | .647 | .126 -.001, +.007 | .063 -.001, +.007 |
| 14 | | .797 | 1.375 | .772 | | |
| 16 | | .922 | 1.500 | .897 | .182 -.001, +.010 | .108 -.001, +.010 |
| 18 | .625 | 1.040 | 1.625 | 1.022 | | |
| 20 | | 1.164 | 1.750 | 1.148 | | |
| 22 | | 1.289 | 1.875 | 1.272 | | |
| 24 | | 1.539 | 2.125 | 1.473 | .260 -.001, +.010 | .155 -.001, +.010 |
| 28 | | 1.780 | 2.37 | 1.692 | | |
| 32 | .563 | 1.967 | 2.625 | 1.942 | | |
| 36 | | 2.217 | 2.875 | 2.161 | | |
| 40 | .703 | 2.530 | 3.125 | 2.411 | | |
| 44 | | 2.780 | 3.500 | 2.692 | | |

FIGURE 1. Dimensions and configuration - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:07Z
Check the source to verify that this is the current version before use.

<table>
<tr><th>Size</th><th>CCC</th><th>DDD<br>Socket insert<br>location<br>± .030</th><th>EEE<br>Pin insert<br>location<br>± .030</th><th>Z<br>max</th><th>Z<br>min<br>(size D only)</th></tr>
<tr><td>12</td><td rowspan="2">.0035</td><td rowspan="11">.020</td><td rowspan="12">.729</td><td rowspan="3">.726</td><td rowspan="4">NA</td></tr>
<tr><td>14</td></tr>
<tr><td>16</td><td rowspan="11">.007</td></tr>
<tr><td>18</td><td rowspan="4">.711</td></tr>
<tr><td>20</td><td rowspan="2">.780</td></tr>
<tr><td>22</td></tr>
<tr><td>24</td><td rowspan="2">.648</td><td rowspan="2">.717</td></tr>
<tr><td>28</td></tr>
<tr><td>32</td><td rowspan="3">.576</td><td rowspan="4">.655</td></tr>
<tr><td>36</td></tr>
<tr><td>40</td></tr>
<tr><td>44</td><td>.039</td><td>.764</td><td>.797</td></tr>
</table>

FIGURE 1. Dimensions and configuration - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:07Z
Check the source to verify that this is the current version before use.

| Inches | mm | Inches | mm | Inches | mm | Inches | mm |
|---|---|---|---|---|---|---|---|
| .001 | 0.03 | .686 | 17.34 | 1.068 | 27.13 | 1.786 | 45.36 |
| .0035 | 0.09 | .688 | 17.48 | 1.078 | 27.97 | 1.875 | 47.63 |
| .005 | 0.13 | .692 | 17.58 | 1.094 | 28.78 | 1.942 | 49.33 |
| .006 | 0.15 | .703 | 17.86 | 1.125 | 28.58 | 1.967 | 49.96 |
| .007 | 0.18 | .711 | 18.06 | 1.148 | 29.16 | 2.000 | 50.80 |
| .010 | 0.25 | .717 | 18.21 | 1.164 | 29.60 | 2.005 | 50.93 |
| .016 | 0.41 | .726 | 14.44 | 1.188 | 30.18 | 2.0625 | 52.60 |
| .020 | 0.51 | .729 | 18.52 | 1.192 | 30.28 | 2.125 | 53.98 |
| .021 | 0.53 | .750 | 19.05 | 1.250 | 31.75 | 2.161 | 54.89 |
| .030 | 0.76 | .750 | 19.05 | 1.272 | 32.31 | 2.217 | 56.31 |
| .031 | 0.79 | .764 | 19.41 | 1.281 | 32.54 | 2.250 | 57.15 |
| .039 | 0.99 | .766 | 19.46 | 1.289 | 33.74 | 2.255 | 57.28 |
| .062 | 1.57 | .772 | 19.61 | 1.312 | 33.32 | 2.3125 | 58.737 |
| .063 | 1.60 | .780 | 19.81 | 1.317 | 33.45 | 2.375 | 60.33 |
| .108 | 2.74 | .797 | 20.24 | 1.375 | 34.925 | 2.411 | 61.24 |
| .126 | 3.20 | .812 | 20.62 | 1.375 | 34.93 | 2.500 | 63.50 |
| .141 | 3.58 | .817 | 20.75 | 1.465 | 37.21 | 2.530 | 64.26 |
| .155 | 3.94 | .875 | 22.23 | 1.473 | 37.41 | 2.545 | 64.64 |
| .182 | 4.62 | .897 | 22.78 | 1.500 | 38.10 | 2.625 | 66.70 |
| .260 | 6.60 | .915 | 23.24 | 1.527 | 38.79 | 2.692 | 68.38 |
| .500 | 12.70 | .922 | 23.42 | 1.536 | 39.01 | 2.750 | 69.85 |
| .547 | 13.89 | .938 | 23.82 | 1.539 | 39.09 | 2.764 | 70.21 |
| .563 | 14.30 | .942 | 23.93 | 1.590 | 40.39 | 2.780 | 70.61 |
| .567 | 14.40 | .953 | 24.21 | 1.605 | 40.77 | 2.875 | 73.03 |
| .576 | 14.63 | .977 | 24.82 | 1.625 | 41.28 | 3.000 | 76.20 |
| .622 | 15.80 | 1.000 | 25.40 | 1.692 | 42.98 | 3.125 | 79.38 |
| .625 | 15.86 | 1.016 | 25.81 | 1.750 | 44.45 | 3.250 | 82.55 |
| .641 | 16.28 | 1.022 | 25.96 | 1.780 | 45.21 | 3.500 | 88.90 |
| .647 | 16.43 | 1.040 | 24.41 | | | | |
| .648 | 16.45 | 1.055 | 26.80 | | | | |
| .655 | 16.64 | 1.062 | 26.97 | | | | |
| .672 | 17.06 | | | | | | |

NOTES:

1. All dimensions are in inches.
2. Unless otherwise specified tolerances are ± .016 inch (0.41 mm).
3. Metric equivalents are given for information only.
4. Maximum termination of grommet extension for sizes 12 and 16 contacts for class J.
5. Maximum termination of grommet extension for sizes 0, 4 and 8 contacts for class J.
6. For protective cover, see MS17349, type A.

FIGURE 1. Dimensions and configuration - Continued.




Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:07Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction, see figure 1.
Mates with plug MS17344.
Dimensions shall be maintained when inserts are pressed firmly against indicated shoulder.
For size 0 contacts only, increase X dimension by .312 (7.92 mm) for shell sizes 12 through 40 and by .062 (1.57 mm) for shell size 44.
For size, insert arrangement, alternate position, contact size, spacing and service rating, see MIL-STD-1651.
Shell finish shall be designated by the letter C (conductive) or N (nonconductive).

PIN example:

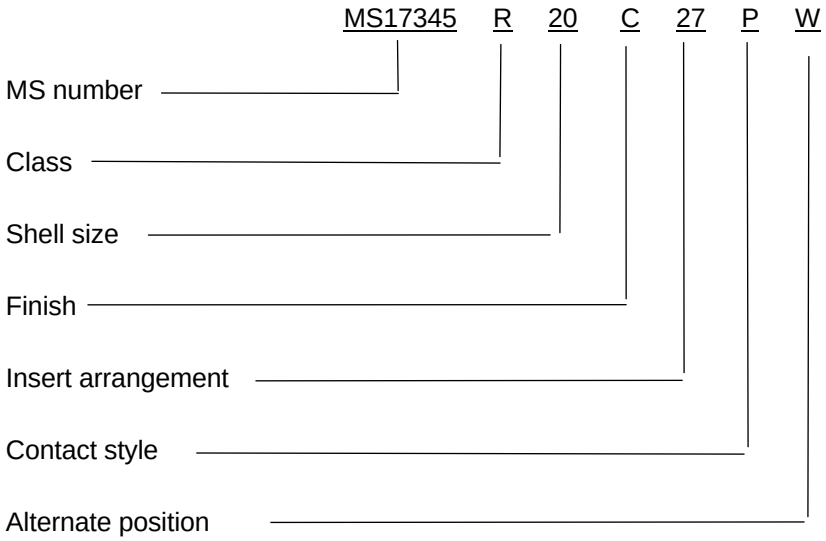


Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Referenced documents. In addition to MIL-DTL-22992, this document references the following:

MS17344
MS17349
MIL-STD-1651



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:07Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army – CR
Navy – EC
Air Force – 11
DLA – CC

Preparing activity:
DLA – CC

Review activities:
Army – AR, MI
Navy – AS, CG, MC, OS, YD
Air Force – 19

(Project 5935–4719–007)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change. you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:07Z
Check the source to verify that this is the current version before use.