This milit dard has been approved by the Department of Defense and is mandator use by all Departments and Agencies of the Department of Defense Selection for all new engineering design applications and for repetitive use shall be made from this document

Rev. .
Army - GL
Navy - YD
Air Force - 11, 69
DSA-ES

Users:
WC, MD, CE

DD FORM 672-1
1 OCT 62

PROCUREMENT SPECIFICATION
MIL-C-4751

P.A. Air Force - 11
Other Custodians
Army - WC
Navy - YD


SUPERSEDES:

MILITARY STANDARD


CASTERS, RIGID AND SWIVEL, PRECISION PNEUMATIC TIRED

MS24373

SHEET 1 OF 2

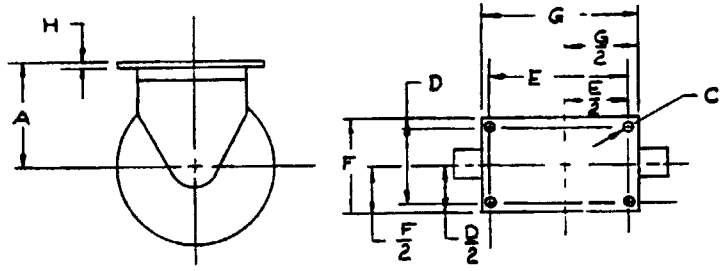

RIGID & SWIVEL CASTER NONOFFSET

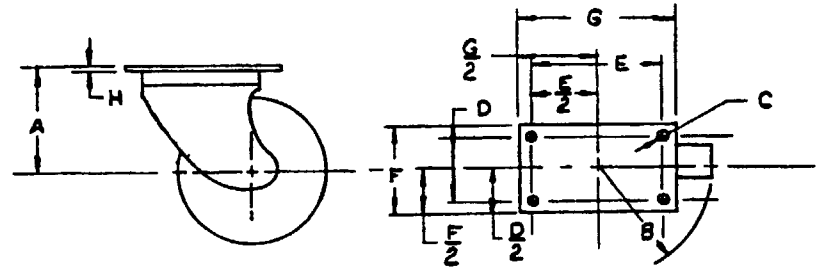

SWIVEL CASTER OFFSET

DIMENSIONS IN INCHES.

FOLLOWING NOTES APPLY TO MS PART NO. TABLE (SEE SHEET 2).

(a) DASH NUMBERS -6, -8, -9, & -10 DESIGNATE THE WHEEL SIZE AS DESIGNATED BY THE "TIRE SIZE" COLUMN.

THE FIRST DASH LETTERS DESIGNATE THE STYLE OF CASTER AS FOLLOWS:
R - RIGID
N - NONOFFSET SWIVEL
W - OFFSET SWIVEL

THE SECOND DASH LETTERS DESIGNATE THE TYPE OF WHEEL AS FOLLOWS:
S - SINGLE
D - DUAL

THE THIRD DASH LETTERS DESIGNATE THE MOUNTING AS FOLLOWS:
C - CANTILEVER MOUNTED (SINGLE & DUAL WHEELS)
F - FORK MOUNTED (SINGLE WHEELS ONLY)

(A) ADDITIONAL DASH LETTERS SHALL BE ADDED TO CASTERS, WHEN REQUIRED:
TO DESIGNATE THE FOLLOWING:
P - STEERING PROVISIONS

(A) B - BRAKES INSTALLED

(b) APPLIES ONLY TO OFFSET SWIVEL CASTERS

EXAMPLE OF PART NO. MS 24373-6WSFP: SIZE 3.50 X 6, OFFSET SWIVEL, SINGLE WHEEL, FORK MOUNTED, STEERING PROVISIONS

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.

FED SUP CLASS 5340

(A) For changes see sheets 1 & 2. Sheet 3 deleted.

APPROVED 30 JAN 58 REVISED (A) 3 SEP 65

Source: https://assist.dla.mil -- Downloaded: 202610-23T14:53Z
Check the source to verify that this is the current version before use.

Military standard has been approved by the Department of Defense and is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering design applications and for repetitive use shall be made from this document.

Reviewers:
Army - CL
Navy - YD
Air Force - 11, 69
DSA-IS (A)

Users:
WC, MO, CE

DD FORM 672-1
1 OCT 62

PROCUREMENT SPECIFICATION
MIL-C-4151

Other Custodians
Army - MO
Navy - YD

(P.A. Air Force - 11

SUPERSEDES:

CASTERS, RIGID AND SWIVEL, PRECISION
PNEUMATIC TIRED

MILITARY STANDARD

MS2437-

SHEET 2

MS PART NO. (a)		TIRE SIZE	STYLE CASTER	TYPE WHEEL	TYPE MOUNTING	WHEEL DIA. (NOM.)	RATED LOAD LBS (MIN)	WEIGHT MAX. LBS.	A HEIGHT AXLE ℄ TO TOP OF PLATE ± 1/8	B (b) SWIVEL CLEARANCE MAX.	B (b) SWIVEL CLEARANCE MIN.	C DIA. OF BOLT HOLES ±.005	D BOLT HOLE SPACING ±.010	E BOLT HOLE SPACING ±.010	F TOP PLATE WIDTH MAX.	G TOP PLATE LENGTH MAX	H TOP PLATE THICKNESS AT BOLT HOLES MIN.
MS24373-6RSC		3.50 X 6	RIGID	SINGLE	CANTILEVER FORK	13	490	70	11	12	9	.656	4.875	6.750	7	8-1/2	3/4
MS24373-6RSF																	
MS24373-6NSC			NONOFFSET SWIVEL		CANTILEVER FORK												
MS24373-6NSF																	
MS24373-6WSC			OFFSET SWIVEL		CANTILEVER FORK												
MS24373-6WSF																	
MS24373-6RDC			RIGID	DUAL	CANTILEVER		660	120									
MS24373-6NDC			NONOFFSET SWIVEL														
MS24373-6WDC			OFFSET SWIVEL														
MS24373-8RSC		4.00 X 8	RIGID	SINGLE	CANTILEVER FORK	16	950	90	12-1/2	15	12	.656	7.000	9.750	9	11	3/4
MS24373-8RSF																	
MS24373-8NSC			NONOFFSET SWIVEL		CANTILEVER FORK												
MS24373-8NSF																	
MS24373-8WSC			OFFSET SWIVEL		CANTILEVER FORK												
MS24373-8WSF																	
MS24373-8RDC			RIGID	DUAL	CANTILEVER		1280	140									
MS24373-8NDC			NONOFFSET SWIVEL														
MS24373-8WDC			OFFSET SWIVEL														
MS24373-9RSC		6.00 X 9	RIGID	SINGLE	CANTILEVER FORK	21	1960	110	15-1/8	(A) 21	18	.656	7.000	9.750	9	11	3/4
MS24373-9RSF																	
MS24373-9NSC			NONOFFSET SWIVEL		CANTILEVER FORK												
MS24373-9NSF																	
MS24373-9WSC			OFFSET SWIVEL		CANTILEVER FORK												
MS24373-9WSF																	
MS24373-9RDC			RIGID	DUAL	CANTILEVER		2690	160									
MS24373-9NDC			NONOFFSET SWIVEL														
MS24373-9WDC			OFFSET SWIVEL														
MS24373-10RSC		7.50 X 10	RIGID	SINGLE	CANTILEVER FORK	25	2680	(A) 150	17-1/4	(A) 23	20	.656	7.000	9.750	9	11	3/4
MS24373-10RSF																	
MS24373-10NSC			NONOFFSET SWIVEL		CANTILEVER FORK												
MS24373-10NSF																	
MS24373-10WSC			OFFSET SWIVEL		CANTILEVER FORK												
MS24373-10WSF																	
MS24373-10RDC			RIGID	DUAL	CANTILEVER		3860	(A) 270									
MS24373-10NDC			NONOFFSET SWIVEL														
MS24373-10WDC			OFFSET SWIVEL														

(A) NOTE DELETED

FED SUP CLASS 5340

APPROVED 30 JAN 58 REVISED (A) For changes see sheets 1 & 2

Source: https://assist.dla.mil -- Downloaded: 20260-23T14:53Z
Check the source to verify that this is the current version before use.