
FED. SUP CLASS
5935

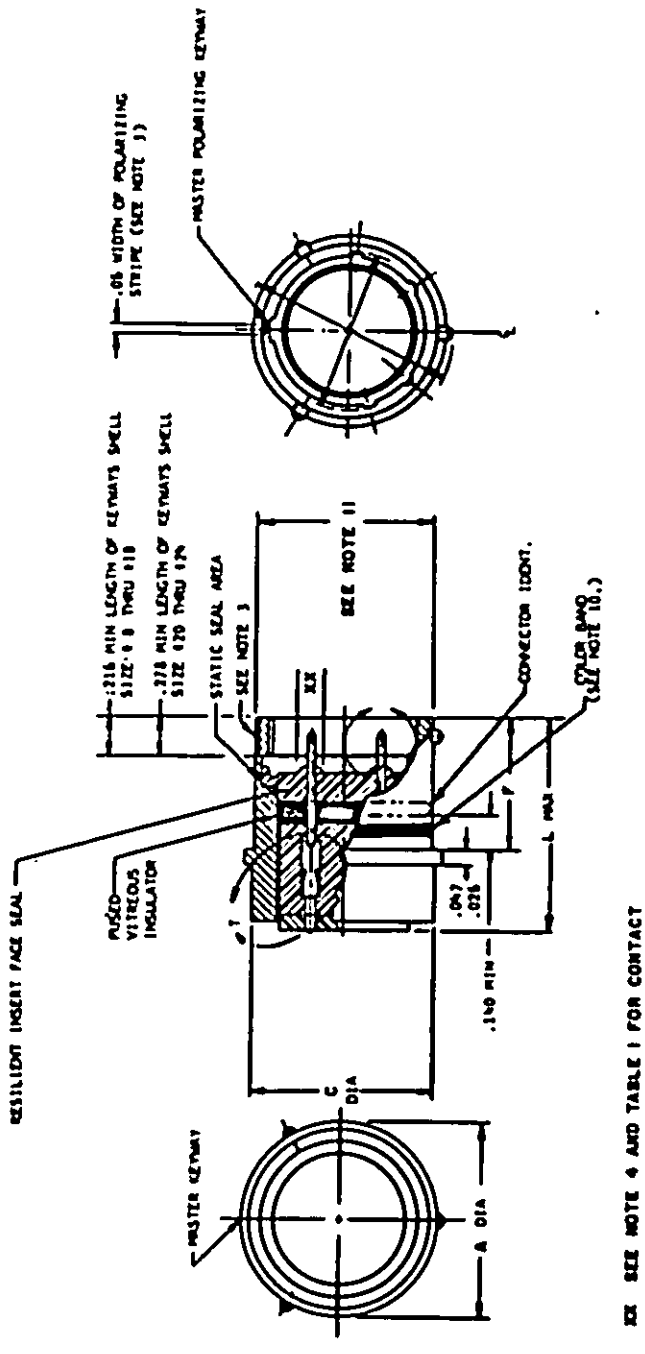

APPROVED 17 Jan 72 REVISED (A) 5 SEPT 1975

User activities: Army AV
Navy
Air Force

Review activities: Army MU, MI, EL
Navy EC, SH
Air Force 11, 17

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

(A) Entire standard revised

P.A. Navy - AS Other Cost Army - EL AF - 85	International interest	TITLE CONNECTORS, RECEPTACLE, ELECTRIC, SERIES 2, HERMETIC, SOLDERLESS, SOLDER MOUNTING, BAYONET COUPLING, CLASS N	MILITARY STANDARD MS 3473
Procurement Specification MIL-C-26482		SUPERSEDES: MS3473 (NAVY)	SHEET 1 OF 4

DD FORM 1 SEP 63 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.


5935-1947-19

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:06Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5935

User activities: Army AV
Navy
Air Force

Reviewer activities: Army MU, MI, EL
Navy EC, SH
Air Force 11, 17

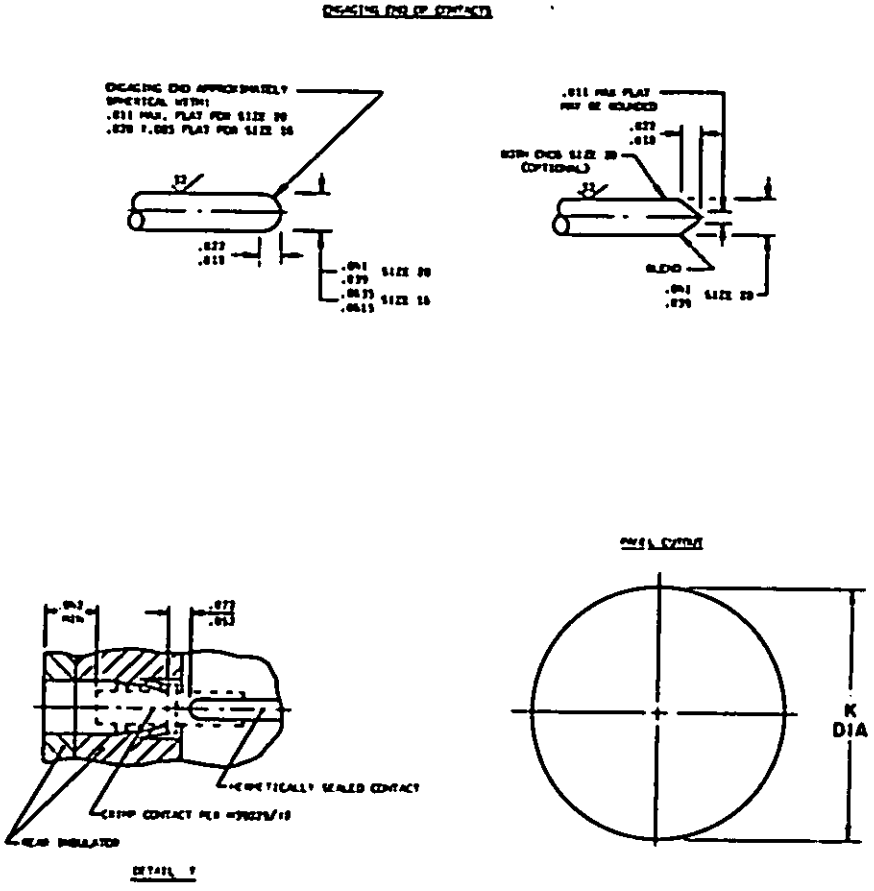

APPROVED 17 Jan 72 REVISED (A) Entire standard revised

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A Navy - AS Other Cust Army - EL AF - 85	International Interest	TITLE CONNECTORS, RECEPTACLE, ELECTRIC, SERIES 2, HERMETIC, SOLDERLESS, SOLDER MOUNTING, BAYONET COUPLING, CLASS N	MILITARY STANDARD MS 3473
Procurement Specification MIL-C-26482		SUPERSEDES: MS3473 (NAVY)	SHEET 2 OF 4

DD FORM 1 SEP 63 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. 5935-1947-19

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:06Z
Check the source to verify that this is the current version before use.

Size	A	C	F	K	L	Weight (lbs) max Pin insert
8	.635/.615	.563/.557	.735/.711	.570	1.078	(Weight will be supplied in later revision)
10	.760/.740	.673/.667		.680		
12	.854/.834	.782/.776		.789		
14	.979/.959	.907/.901		.914		
16	1.104/1.084	1.032/1.026		1.039		
18	1.228/1.208	1.157/1.151	.735/.711	1.164	1.078	
20	1.322/1.302	1.251/1.245	.823/.799	1.258	1.140	
22	1.448/1.428	1.376/1.370	.823/.799	1.383	1.140	
24	1.574/1.554	1.501/1.495	.823/.799	1.508	1.140	

TABLE I. Reduced diameters (XX).

Shell size	Insert arrangements	Contact cavities
8	-33 & -98	A, B, C.
12	-10	C, G.
14	-12	A, B, C, D, E, F, G, H.
14	-18	A, C, E, G, J, L.
14	-19	B, D, F, H, K, M.
16	-26	A, B, C, D, E, F, G, H, J, K, L, M, N, P, R.
18	-32	A, B, C, D, E, F, G, H, J, K, L, M, N, P, R, S, T.
22	-41	A, B, C, D, E, F, G, H, J, K, L, M, N, P, R, S, T, U, V, W, X, Y.

User activities: Army AV, Navy, Air Force

Review activities: Army MU, MI, EL; Navy EC, SH; Air Force 11, 17

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.


APPROVED 17 Jan 72 REVISED (A) Entire standard revised

P.A Navy - AS Other Cust Army - EL AF - 85	International interest	TITLE CONNECTORS, RECEPTACLE, ELECTRIC, SERIES 2, HERMETIC, SOLDERLESS, SOLDER MOUNTING, BAYONET COUPLING, CLASS N	MILITARY STANDARD MS 3473
Procurement Specification MIL-C-26482		SUPERSEDES: MS3473 (NAVY)	SHEET 3 OF 4

DD FORM 1 SEP 63 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. 5935-1947-19

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:06Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5935

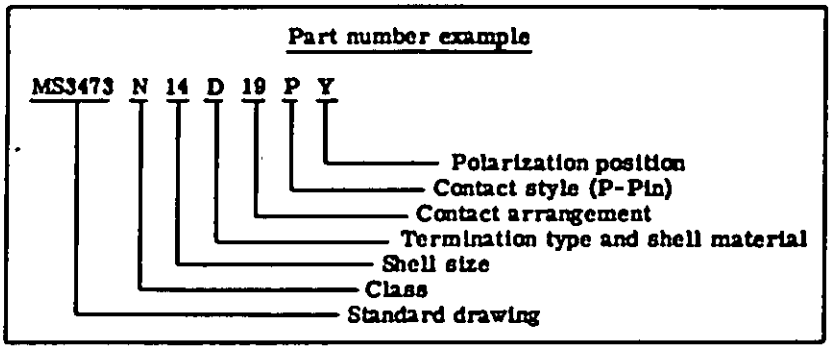

NOTES:
1. Dimensions are in inches.
2. Tolerances shall be .XX ±.01, .XXX ±.005, angular X° ±1° and X°X' ±30'.
3. Polarizing stripe, color optional.
4. Insert arrangements requiring reduced diameters for raised seal barriers on outer row of contact cavities as indicated. (See table I).
5. Contact MIL-C-39029/15-XX-XX must be used for wire termination.
6. Shell material: Cold rolled steel, per QQ-S-637.
7. Shell finish: .0001 minimum tin per MIL-T-10727, over nickel per QQ-N-290.
8. Color band: .070 ±.031 wide, color blue. Band location must be such that it is visible when mounting.
9. Insertion/removal tool MS3160-XX to be used with this connector.
10. Maximum wire diameter permissible: .074 for size 20 contact, .103 for size 16 contact.
11. Intermateability dimensions shall be in accordance with MIL-C-26482.
12. For insert arrangements see MIL-STD-1669.
13. For design feature purposes, this standard takes precedence over procurement documents referenced herein.
14. Referenced documents shall be of the issue in effect on date of invitations for bids.

APPROVED 17 Jan 72 REVISED (A) Entire standard revised

User activities: Army AV, Navy, Air Force

Reviewer activities: Army MU, MI, EL; Navy EC, SH; Air Force 11, 17

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A Navy - AS Other Cust Army - EL AF - 85	International interest	TITLE CONNECTORS, RECEPTACLE, ELECTRIC, SERIES 2, HERMETIC, SOLDERLESS, SOLDER MOUNTING, BAYONET COUPLING, CLASS N	MILITARY STANDARD MS 3473
Procurement Specification MIL-C-26482		SUPERSEDES: MS3473 (NAVY)	SHEET 4 OF 4

DD FORM 1 SEP 63 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. 5935-1947-19

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:06Z
Check the source to verify that this is the current version before use.