
FED. SUP CLASS
5305

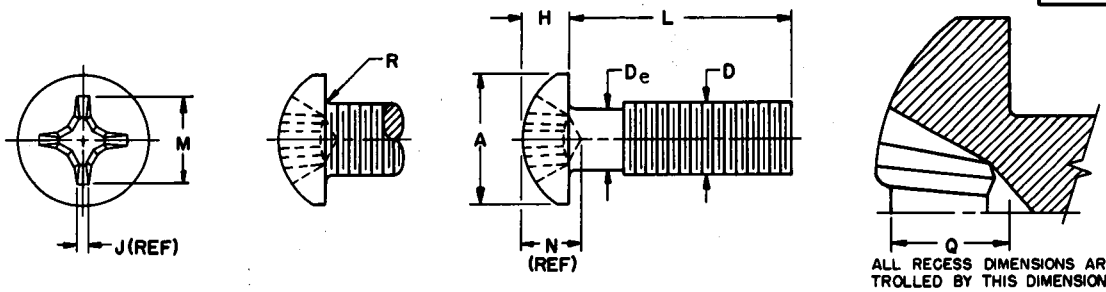

ALL RECESS DIMENSIONS ARE CONTROLLED BY THIS DIMENSION— SEE PROCUREMENT SPECIFICATION

NOMINAL SIZE	D		2 (.086)	4 (.112)	6.(.138)	8.(.164)
THREADS PER INCH			56NC	40NC	32NC	32NC
BODY DIAMETER	D_e	Max	.0860	.1120	.1380	.1640
		Min	.0717	.0925	.1141	.1399
HEAD DIAMETER	A	Max	.167	.219	.270	.322
		Min	.155	.205	.256	.306
HEAD HEIGHT	H	Max	.062	.080	.097	.115
		Min	.053	.070	.087	.105
RECESS DIAMETER	M	Max	.101	.119	.163	.179
		Min	.091	.109	.153	.169
RECESS DEPTH	N	Max	.071	.090	.111	.127
		Min	.061	.080	.101	.117
RECESS WIDTH	J	Min	.017	.018	.028	.030
RADIUS	R	Max	.013	.018	.023	.023
DRIVER SIZE			1	1	2	2

LENGTH	L	Tolerance	Dash Number	Dash Number	Dash Number	Dash Number
THREADS SHALL EXTEND TO WITHIN 2 THREADS OF THE BEARING SURFACE OF THE HEAD, OR CLOSER IF PRACTICABLE.	1/8	+0 -1/32	1	10	21	36
	3/16		2	11	22	37
	1/4		3	12	23	38
	5/16		4	13	24	39
	3/8		5	14	25	40
	7/16		6	15	26	41
	1/2		7	16	27	42
	5/8		8	17	28	43
	3/4		9	18	29	44
	7/8			19	30	45
	1			20	31	46
	1-1/4	+0 -1/16			32	47
	1-1/2				33	48
	1-3/4				34	49
	2				35	50
Minimum complete thread length of 1-3/4						

Ⓐ CANCELLED
SEE SHEET 2

MATERIAL: Corrosion Resisting Steel, Specification QQ-S-763, Class B, Type C or Class 6, Type C.

FINISH: Passivated - by immersion for a period of 20 minutes in a solution containing 15 percent (by weight) of nitric acid at room temperature followed by a thorough rinse in hot water.

THREADS: The threads shall be in accordance with Screw-Thread Standards for Federal Services, Handbook H-28.

NOTES:
(1) Recess shall conform with Type III, Design I, of procurement specification.
(2) Referenced documents of issue in effect on date of invitation for bids shall apply.
(3) In case of conflict with any referenced document, this standard will govern.
(4) The MS part number consists of the MS sheet number, plus the dash number. Example: MS35216-1.

Ⓐ For changes see sheets 1 and 2.

APPROVED 25 JUNE 53 REVISED Ⓐ 12 DEC 63

NOTICE.—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A.	WC
Other Cust	Ships MOAMA

TITLE
SCREW, MACHINE, PAN HEAD, CROSS-RECESSED, CORROSION RESISTING STEEL, PASSIVATED, NC-2A AND UNC-2A

MILITARY STANDARD
MS 35216

PROCUREMENT SPECIFICATION
FF-S-92

SUPERSEDES:

SHEET 1 OF 2

DD FORM 1 SEP 57 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil — Downloaded: 2026-10-23T17:11Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5305

NOMINAL SIZE	D		10 (.190)	1/4	5/16	3/8
THREADS PER INCH			24NC	20UNC	18UNC	16UNC
BODY DIAMETER	D_e	Max	.1900	.2500	.3125	.3750
		Min	.1586	.2127	.2712	.3287
HEAD DIAMETER	A	Max	.373	.492	.615	.740
		Min	.357	.473	.594	.716
HEAD HEIGHT	H	Max	.133	.175	.218	.261
		Min	.122	.162	.203	.244
RECESS DIAMETER	M	Max	.196	.278	.347	.390
		Min	.186	.268	.337	.380
RECESS DEPTH	N	Max	.145	.192	.227	.266
		Min	.135	.182	.217	.256
RECESS WIDTH	J	Min	.031	.039	.059	.065
RADIUS	R	Max	.031	.025	.027	.031
DRIVER SIZE			2	3	4	4

LENGTH	L	Tolerance	Dash Number	Dash Number	Dash Number	Dash Number
THREADS SHALL EXTEND TO WITHIN 2 THREADS OF THE BEARING SURFACE OF THE HEAD, OR CLOSER IF PRACTICABLE.	1/8	+0 -1/32	51	Ⓐ CANCELLED SEE NOTE		
	3/16		52	66		
	1/4		53	67	80	
	5/16		54	68	81	
	3/8		55	69	82	93
	7/16		56	70	83	94
	1/2		57	71	84	95
	5/8		58	72	85	96
	3/4		59	73	86	97
	7/8		60	74	87	98
	1		61	75	88	99
	1-1/4	+0 -1/16	62	76	89	100
	1-1/2		63	77	90	101
	1-3/4		64	78	91	102
	2					
Minimum Complete Thread Length of 1-3/4	2-1/4	+0 -3/32	65	79	92	103
	2-1/2					104
	2-3/4					105
	3					

NOTE: For illustration, material, finish, and other pertinent data, see sheet 1.

Ⓐ Cancelled after 12 Dec 63 Use MS51957.
Interchangeability relationship - MS51957can replace the cancelled screws of the same size. The cancelled MS35216 cannot always replace MS51957and should be used until existing stock is depleted. Then use only the superseding MS screws of the same size for design and replacement.

APPROVED 25 JUNE 53 REVISED Ⓐ FOR CHANGES SEE SHEETS 1 AND 2.

NOTICE.—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A.	WC
Other Cust	Ships MOAMA

TITLE
SCREW, MACHINE, PAN HEAD, CROSS-RECESSED, CORROSION RESISTING STEEL, PASSIVATED, NC-2A AND UNC-2A

MILITARY STANDARD
MS 35216

PROCUREMENT SPECIFICATION
FF-S-92

SUPERSEDES:

SHEET 2 OF

DD FORM 1 SEP 87 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 20260-23T17:11Z
Check the source to verify that this is the current version before use.