
FED. SUP CLASS
3120

REVIEW ACTIVITIES: ARMY-AV, ME, MI, MU; DSA-IS
USER ACTIVITIES: NAVY-MC, YD

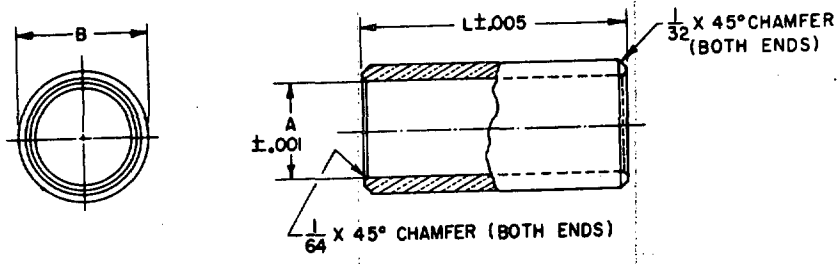

A-BODY, INSIDE DIAMETER	3/16	1/4	5/16	3/8	7/16
B-BODY, OUTSIDE DIAMETER MAX.	.378	.4405	.503	.5655	.628
B-BODY, OUTSIDE DIAMETER MIN.	.377	.4395	.502	.5645	.627
WALL THICKNESS (REF.)	3/32	3/32	3/32	3/32	3/32
L-LENGTH	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.
1/2	1	8	15	25	34
5/8	2	9	16	26	35
3/4	3	10	17	27	36
1		11	18	28	37
1-1/4		12	19	29	38

A-BODY, INSIDE DIAMETER	1/2	9/16	5/8	11/16	3/4
B-BODY, OUTSIDE DIAMETER MAX.	.6905	.753	.8155	.878	1.003
B-BODY, OUTSIDE DIAMETER MIN.	.6895	.752	.8145	.877	1.002
WALL THICKNESS (REF.)	3/32	3/32	3/32	3/32	1/8
L-LENGTH	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.
1/2	46	55	65	75	
5/8	47	56	66	76	85
3/4	48	57	67	77	86
1	49	58	68	78	87
1-1/4	50	59	69	79	88
1-1/2			70	80	89
1-3/4			71	81	90
2			72	82	91

A-BODY, INSIDE DIAMETER	7/8	1	1-1/8	1-1/4	1-3/8
B-BODY, OUTSIDE DIAMETER MAX.	1.128	1.253	1.378	1.503	1.6905
B-BODY, OUTSIDE DIAMETER MIN.	1.127	1.252	1.377	1.502	1.6895
WALL THICKNESS (REF.)	1/8	1/8	1/8	1/8	5/32
L-LENGTH	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.
5/8	96				
3/4	97	106	116		
1	98	107	117	127	138
1-1/4	99	108	118	128	139
1-1/2	100	109	119	129	140
1-3/4	101	110	120	130	141
2		111	121	131	142
2-1/4			122	132	143
2-1/2				133	144

© FOR CHANGES SEE SHEET 1 AND 2

APPROVED 31 JULY 1956 REVISED (A) 1 DEC. 1961 (B) 14 NOVEMBER 1967 (C) 21 FEBRUARY 1975

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. ARMY-AT	TITLE	MILITARY STANDARD
Other Cust NAVY-AS © AF-11	BEARING, SLEEVE: PLAIN, BRONZE	MS 35771
PROCUREMENT SPECIFICATION FF-B-195	SUPERSEDES:	SHEET 1 OF 2

DD FORM 1 SEP 67 672-1 (Continued) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:27Z
Check the source to verify that this is the current version before use.

A-BODY, INSIDE DIAMETER	1-1/2	1-3/4	2	2-1/4	2-1/2
B-BODY, OUTSIDE DIAMETER MAX.	1.8155	2.0655	2.378	2.628	2.878
B-BODY, OUTSIDE DIAMETER MIN.	1.8145	2.0645	2.377	2.627	2.877
WALL THICKNESS (REF.)	5/32	5/32	3/16	3/16	3/16
L-LENGTH	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.
1-1/4	150	171			
1-1/2	151	172	182		
1-3/4	152	173	183	193	
2	153	174	184	194	203
2-1/4	154	175	185	195	204
2-1/2	155	176	186	196	205
2-3/4	156	177	187	197	206
3			188	198	207
3-1/2					208

A-BODY, INSIDE DIAMETER	2-3/4	3	3-1/2	4	
B-BODY, OUTSIDE DIAMETER MAX.	3.130	3.380	4.005	4.505	
B-BODY, OUTSIDE DIAMETER MIN.	3.128	3.378	4.003	4.503	
WALL THICKNESS (REF.)	3/16	3/16	1/4	1/4	
L-LENGTH	DASH NO.	DASH NO.	DASH NO.	DASH NO.	
2	213	223			
2-1/4	214	224			
2-1/2	215	225	234		
2-3/4	216	226	235		
3	217	227	236	245	
3-1/2	218	228	237	246	
4		229	238	247	
4-1/2			239	248	
5				249	

NOTES:

(C) 1. MATERIAL: COPPER ALLOY, CASTING ALLOY NO. 932, TYPE OPTIONAL, CONDITION - AS CAST PER QQ-C-390.

2. SURFACE FINISH: INSIDA AND OUTSIDE DIAMETERS SHALL HAVE A 63 SURFACE FINISH, IN ACCORDANCE WITH USASI B46.1.

3. UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES.

4. BEARINGS SHALL BE CONCENTRIC WITHIN .002 TOTAL INDICATOR READING FOR UP TO 2 INCH O.D. AND .003 FOR OVER 2 INCH O.D.

5. THE MS PART NUMBER CONSISTS OF THE MS NUMBER, PLUS THE DASH NUMBER. EXAMPLE: MS 35771-1

6. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

7. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

APPROVED 31 JULY 1956 REVISED (C) FOR CHANGES SEE SHEET 1 AND 2

P.A. ARMY-AT Other Cust	TITLE BEARING, SLEEVE: PLAIN, BRONZE	MILITARY STANDARD MS 35771
PROCUREMENT SPECIFICATION FF-B-195	SUPERSEDES:	SHEET 2 OF 2

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:27Z
Check the source to verify that this is the current version before use.