
FED. SUP CLASS
5340

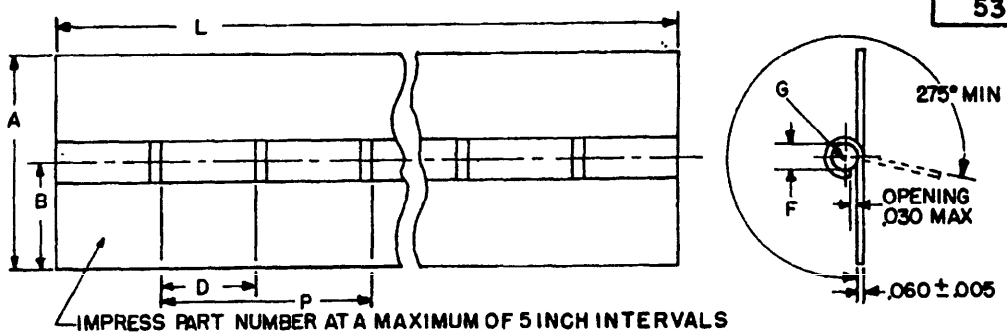


| DASH NO. | WIDTH A REF | WIDTH B ±.031 | STOCK LENGTH L ±.03 | KNUCKLE LENGTH * D | PITCH ** P | KNUCKLE DIA P | PIN DIA G |
|---|---|---|---|---|---|---|---|
| 9 | 1.062 | .531 | 84.00 SEE NOTE 7 | $.998^{+.000}_{-.015}$ | $2.000^{+.015}_{-.003}$ | $.192^{+.007}_{-.001}$ | .187±.002 |
| 10 | 1.500 | .750 | | | | | |
| 11 | 2.000 | 1.000 | | | | | |
| 12 | 2.500 | 1.250 | | | | | |
| 13 | 1.062 | .531 | 84.00 SEE NOTE 7 | $1.998^{+.000}_{-.015}$ | $4.000^{+.015}_{-.003}$ | $.192^{+.007}_{-.001}$ | .187±.002 |
| 14 | 1.500 | .750 | | | | | |
| 15 | 2.000 | 1.000 | | | | | |
| 16 | 2.500 | 1.250 | | | | | |

NOTES:

1. MATERIAL:
   - A. Aluminum - Leaf - Temper, H24 or H34 half hard, per QQ-A-250/8.
     Aluminum - Pin - Temper, half hard, per QQ-A-225/7.
   - B. Brass - Leaf - Alloy 268, temper half hard, per QQ-B-613.
     Copper - Pin - Alloy 260, temper half hard per QQ-W-321.
   - C. Corrosion Resisting Steel - Leaf - Class 301, 302 or 304, Condition A, temper annealed, per QQ-S-766.
     Corrosion Resisting Steel - Pin - Form 1, Condition B, per QQ-W-423.
   - D. Carbon Steel - Leaf - Cold-rolled, temper No. 4, per QQ-S-698.
     Carbon Steel - Pin - Composition 1010, 1020 per QQ-W-461.
   - E. Carbon Steel - Leaf - Cold-rolled, temper No. 4, per QQ-S-698.
     Copper - Pin - Alloy 260, temper half hard, per QQ-W-321.
2. FINISH: Materials A, B, C, and D shall be plain (uncoated).
   Materials D when specified, shall be zinc plated type II, Class 2 of QQ-Z-325 or Cadmium plated type II, Class 1 of QQ-P-416.
   Materials E shall be cadmium plated type II, Class 1 of QQ-P-416.
3. DIMENSIONS: All dimensions are in inches unless otherwise specified.
4. PART NUMBER: The MS part number consists of the MS number plus the dash number followed by the applicable letter for material from note 1.
   Example: MS35826-9A or MS35826-12D.
   When protective finish is required for materials "D", add F to the dash number.
   Example: MS35826-12DF.

*5. End knuckles shall be a minimum 1/2 of knuckle.

**6. Cumulative tolerance on pitch is ±.015 in any 36 inch segment.

7. Hinges shall be stocked and issued in lengths of 84.00 inches. Application may be of any length within the above length.

8. For design feature purposes, this standard takes precedence over procurement documents referenced herein.

9. Reference documents shall be of the issue in effect on date of invitations for bid.

(D) DASH NOS. 1 THRU 8 CANCELLED AND NEW DASH NOS. ASSIGNED FOR "L" DIM. (84.00")

REVIEWER: AT, EL, GL, IS, MI
USER: AV, EA, MC, ME.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

APPROVED 24 JUNE 1957 REVISED (A) 3 AUG 1961 (B) 10 DEC 1971 (C) 22 JAN 1976 (D) 28 OCT 1977

| P.A. AR | TITLE | MILITARY STANDARD |
|---|---|---|
| Other Cust AS 82 | HINGE, BUTT, CONTINUOUS (PIANO) .060 THICKNESS .187 PIN DIA | MS35826 |
| PROCUREMENT SPECIFICATION MIL-H-9850 | SUPERSEDES: | SHEET 1 OF 1 |

DD FORM 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. 5340-1235

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:29Z
Check the source to verify that this is the current version before use.