FED. SUP CLASS
2330

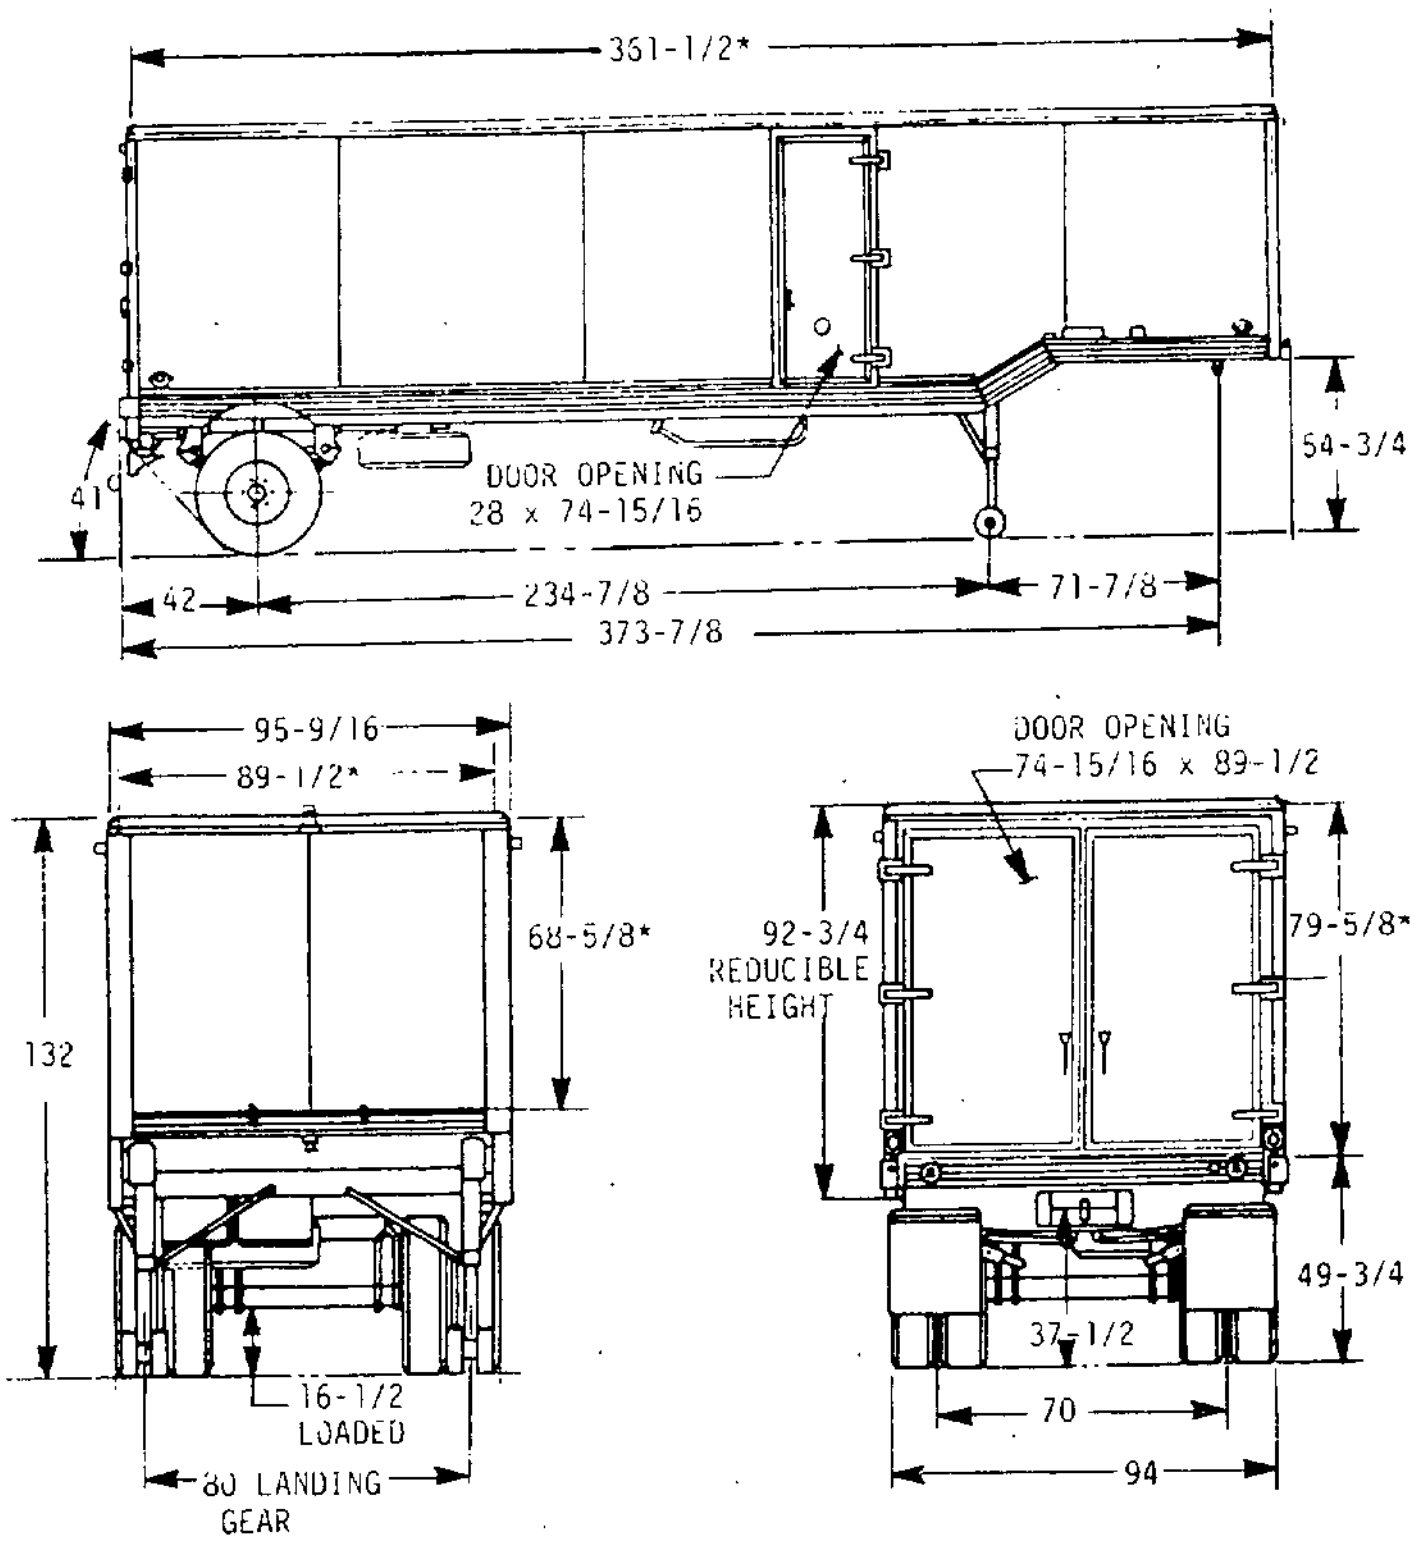

* — INSIDE DIMENSIONS

Ⓑ ENTIRE STANDARD REVISED

MS PART NO.	ENGINEERING DWG NO
MS500042-1	8750511

APPROVED 11 APRIL 1966 REVISED Ⓑ 10 APR 85

P.A. **ARMY-AT**
Other Cust

TITLE
SEMITRAILER, VAN: ELECTRONIC, 6 TON, 2 WHEEL, FLIGHT OPERATIONS CONTROL CENTER, M373A2C

MILITARY STANDARD

MS500042(AT)

PROCUREMENT SPECIFICATION
MIL-S-46714

SUPERSEDES:

SHEET 1 OF 2

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of defense.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

DD FORM 1 SEP 57 672-1 (LIMITED COORDINATION) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:46Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
2330

VEHICLE CHARACTERISTICS

PRIME MOVER: TRUCK, TRACTOR, 5-TON, 6 X 6, M52 SERIES OR M818 SERIES.

CURB WEIGHT:	9430 LBS
LANDING GEAR:	4430 LBS
REAR BOGIE	5000 LBS

GENERAL USAGE: SEMITRAILER VAN IS USED TO HOUSE AND TRANSPORT ELECTRONIC EQUIPMENT OVER ALL TYPES OF ROADS AND LIMITED CROSS-COUNTRY TERRAIN.

VEHICLE/VAN RAILCAR TIEDOWNS: (6) 2 EACH SIDE DOLLY FRAME, 1 EACH SIDE FRONT UNDERCARRIAGE: MEETS MIL-STD-209 REQUIREMENTS FOR SEMITRAILER VAN WITH RATED PAYLOAD. NOTE: BOGIE RAILCAR TIEDOWNS ALSO FOR AIRCRAFT TIEDOWN OF DOLLY ASSEMBLY.

PAYLOAD:

HIGHWAY	CROSS-COUNTRY
16,000 LBS	12,000 LBS

WEIGHT DISTRIBUTION: COUPLED TO PRIME MOVER

	SEMITRAILER EMPTY:	EVENLY DISTRIBUTED PAYLOAD:	
	HIGHWAY	HIGHWAY	CROSS-COUNTRY
KINGPIN	3,390	10,740	8,890 LBS
REAR BOGIE	6,040	14,690	12,540 LBS

VAN BODY ASSEMBLY: ALUMINUM CONSTRUCTION AND WATERTIGHT. VAN BODY IS PROVIDED WITH 2 VENTS AND 3 INTERIOR DOME LIGHTS AND IS INSULATED WITH URETHANE FOAM INSULATION. COMPOSITE THERMAL CONDUCTIVITY OF VAN IS: .23 BTU/HR/SF/F. EXTERIOR SKIN IS ALUMINUM. THE INTERIOR LINER IS PAINTED PLYWOOD, COLOR: WHITE EXTERIOR TYPE, 1/4 INCH THICK. THE FLOOR IS LINOLEUM OVER 3/4 INCH THICK PLYWOOD.

LANDING GEAR: ADJUSTABLE, CRANK OPERATED, CAN BE USED AS LEVELING JACKS.

VEHICLE ELECTRICAL SYSTEM: 24 VOLT SYSTEM, LIGHTING SYSTEM AND REFLECTORS.

PINTLE: ONE, AT REAR, CENTER, NO. MS51335-1, 14,000 LBS CAPACITY.

DOOR LOCKS: ON INBOARD SURFACE OF DOORS, SIDE DOOR WITH ESCAPE - TYPE DOOR LOCK PERMITTING OPENING OF DOOR FROM INSIDE EVEN WHEN DOOR IS PADLOCKED FROM OUTSIDE, TAMPER RESISTANT.

LIFTING EYES: (4) 2 EACH SIDE FRONT AND REAR. PUSH IN/PULL OUT TYPE: MEETS MIL-STD-209 REQUIREMENTS FOR SEMITRAILER VAN WITH RATED PAYLOAD. NOTE: BOGIE RAILCAR TIEDOWNS ALSO FOR AIRCRAFT TIEDOWN OF DOLLY ASSEMBLY.

AIRCRAFT VAN BODY TIE DOWNS: TOTAL QUANTITY 18, 4 FRONT, 5 EACH SIDE, AND 4 REAR. MEET MIL-A8421F REQUIREMENTS FOR TIEDOWN OF VAN BODY (W/O BOGIE) WITH RATED PAYLOAD.

FORDING DEPTH: 5 FEET MAXIMUM.

MAXIMUM TOWING SPEEDS:

PAVED HIGHWAY	50 MPH
GRAVEL AND DIRT (SECONDARY ROADS)	30 MPH
LEVEL CROSS-COUNTRY	20 MPH
HILLY CROSS-COUNTRY	15 MPH

TIRE SIZE: 9:00 X 20, 8 PLY W/TUBE.

SUSPENSION: LEAF SPRINGS

LEVELING JACKS: TWO, REAR, ONE EACH SIDE. TO BE USED IN CONJUNCTION WITH INDEPENDENTLY OPERATED LANDING GEAR. VAN BODY CAN BE LEVELED ON SIDE SLOPES UP TO 10% AND ON LONGITUDINAL SLOPES UP TO 8% (WITH FRONT OF VAN FACING UPHILL).

DOLLY: REMOVABLE W/SPARE TIRE ASSEMBLY, W/ONE AXLE ASSEMBLY, 6-BOLT QUICK DISCONNECT DOLLY.

DOOR HINGES: TAMPER PROOF.

SPARE TIRE: SPARE TIRE CAN BE LIFTED UP/LET DOWN MANUALLY WITH SPARE TIRE HOLDER.

AXLE RATING: 14,000 LBS., CAPACITY (TACTICAL).

WHEELS: DUAL, SIZE 20 X 7-1/2, 6-1/4" OFFSET.

BRAKE SIZE: 16-1/2 X 5-1/2.

BRAKES ACTUATION: AIR OVER HYDRAULIC SERVICE.

REAR DOOR POST: REMOVABLE

MISCELLANEOUS EQUIPMENT:

CHOCK BLOCKS	2
BOARDING LADDERS	2, 3 STEP
MANUAL BOX	1
MUD PLATES, LANDING GEAR	2

INTERIOR LIGHTS: THREE SMALL "SAFETY" 24 VOLT DOME LIGHTS, WITH ON/OFF SWITCH.

KINGPIN: 2 IN. DIA.

NOTES:

1. DIMENSIONS ARE IN INCHES AND ARE SHOWN FOR ENGINEERING REFERENCE ONLY.
2. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
3. THIS VEHICLE SHALL BE IN ACCORDANCE WITH REFERENCED ENGINEERING DRAWINGS, COPIES WHICH MAY BE OBTAINED FROM: US ARMY TANK-AUTOMOTIVE COMMAND, WARREN, MICH. 48090.

Ⓑ ENTIRE STANDARD REVISED

MS PART NO.	ENGINEERING DWG NO
MS500042-1	8750511

APPROVED 11 APRIL 1966 REVISED Ⓑ 10 APR 85

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of defense.

DISTRIBUTION STATEMENT A. Approved for public release: distribution is unlimited.

P.A. **ARMY-AT**
Other Cust

TITLE
SEMITRAILER, VAN: ELECTRONIC, 6 TON, 2 WHEEL, FLIGHT OPERATIONS CONTROL CENTER, M373A2C

MILITARY STANDARD
MS500042(AT)

PROCUREMENT SPECIFICATION
MIL-S-46714

SUPERSEDES:

SHEET 2 OF 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:46Z
Check the source to verify that this is the current version before use.