

FED. SUP CLASS
5305

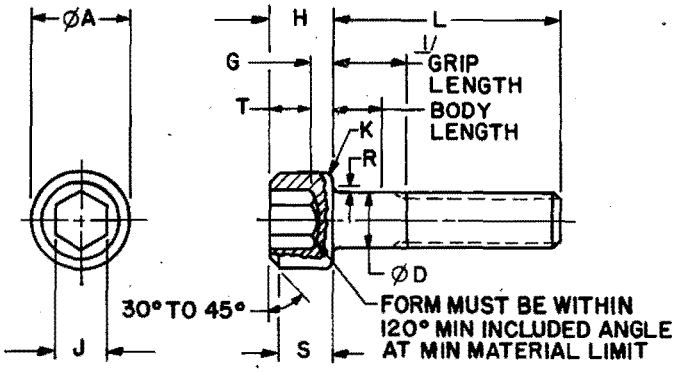



ACCEPTABLE SOCKET DESIGN

DASH NO	1/ GRIP LENGTH MAX
02	.875
05	.500
09	.500
10	.750

TABLE I. DIMENSIONS AND PART NUMBERS.

NOMINAL SIZE			.190	.250	.375	.500
THREADS PER INCH UNF - 3A			32	28	24	20
ØD - BODY DIAMETER		MAX	.1900	.2500	.3750	.5000
		MIN	.1840	.2435	.3678	.4919
ØA - HEAD DIAMETER		MAX	.3125	.3750	.5625	.750
		MIN	.3030	.3650	.5500	.7350
H - HEAD HEIGHT		MAX	.1900	.2500	.3750	.5000
		MIN	.1850	.2440	.3680	.4920
S - HEAD SIZE HEIGHT		MIN	.1710	.2250	.3370	.4500
J - SOCKET WIDTH ACROSS FLATS		MAX	.1587	.1900	.3160	.3790
		MIN	.1562	.1875	.3125	.3750
T - KEY ENGAGEMENT		MIN	.0900	.1200	.1820	.2450
G - WALL TICKNESS		MIN	.0650	.0950	.1430	.1900
K - CHAMFER OR RADIUS		MAX	.0050	.0080	.0080	.0100
R - FILLET		MAX	.0140	.0140	.0200	.0260
EXTENSION		MIN	.0090	.0090	.0150	.0200
MINIMUM TENSILE LOAD - LBS			3,200	5,800	14,000	26,000
L - LENGTH	TOLERANCE		DASH NO	DASH NO	DASH NO	DASH NO
.500 .750 1.000	+.000 -.031		01	03 04	06	
1.250 1.500 2.000 2.500	+.000 -.040		02 1/	05 1/	07 08 09 1/	10 1/

1/ GRIP LENGTH MAX

USER ACTIVITIES:
ARMY-ME, MI
NAVY-MC

REVIEWER ACTIVITIES:
ARMY-EA
NAVY-OS
AIRFORCE-82
DLA-IS
NSA-NS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

APPROVED 1 AUG 84 REVISED

P.A.	AR	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
Other Cust	SH 99		SCREW, CAP, SOCKET HEAD, ALLOY STEEL, UNF-3A	MS51480
PROCUREMENT SPECIFICATION: FF-S-86		SUPERSEDES:		PAGE 1 OF 2

DD FORM 1 MAY 73 672-1 (COMBINATED) 5305-1492

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:02Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5305

REQUIREMENTS:

1. MATERIAL. ALLOY STEEL IN ACCORDANCE WITH PROCUREMENT SPECIFICATION HAVING A MINIMUM TENSILE STRENGTH OF 160,000 PSI.

2. FINISH. ZINC COATING IN ACCORDANCE WITH ASTM B633-78, $Fe/Zn5$ (5 µm). TYPE II.

3. THREADS. THE THREADS SHALL BE IN ACCORDANCE WITH FED-STD-H28/2. ACCEPTABILITY OF SCREW THREADS SHALL BE IN ACCORDANCE WITH FED-STD-H28/20, SYSTEM 21.

4. THREAD LENGTH. SCREWS, DASH NUMBERS 01, 03, 04, 06, 07, AND 08 SHALL HAVE COMPLETE (FULL FORM) THREADS EXTENDING WITHIN TWO THREADS OF THE HEAD AS MEASURED WITH A THREAD RING GAGE. THREADS SHALL NOT EXTEND TO THE FILLET EXTENSION NOR SHALL THREADS EXTEND TO AND UNDERCUT THE HEAD OF THE SCREW.

5. PART NUMBER. THE BASIC MS PART NUMBER IS FOLLOWED BY A DASH NUMBER FROM TABLE I.

EXAMPLE: MS51480-01 - SCREW, CAP, SOCKET HEAD, ALLOY STEEL, .190-32UNF-3A, LENGTH .750, ZINC COATED

NOTES:

1. ALL DIMENSIONS ARE IN INCHES.

2. THE HEAD MAY OR MAY NOT BE KNURLED AT THE MANUFACTURER'S OPTION. TYPE OF KNURLING OPTIONAL.

3. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BIDS OR REQUEST FOR PROPOSAL, EXCEPT THAT REFERENCED ADOPTED INDUSTRY DOCUMENTS SHALL GIVE THE DATE OF THE ISSUE ADOPTED.

4. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

USER ACTIVITIES:
ARMY-ME,MI
NAVY-MC

REVIEWER ACTIVITIES:
ARMY-EA
NAVY-OS
AIRFORCE-82
DLA-IS
NSA-NS

APPROVED 1 AUG 84 REVISED

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

P.A.	AR	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
Other Cust	SH 99		SCREW, CAP, SOCKET HEAD, ALLOY STEEL, UNF-3A	MS51480
PROCUREMENT SPECIFICATION: FF-S-86		SUPERSEDES:		PAGE 2 OF 2

DD FORM 1 MAY 73 672-1 (Continued on page 2) 5305-1492

Source: https://assist.dla.mil -- Downloaded: 2026-10-28T18:02Z
Check the source to verify that this is the current version before use.