
FED. SUP CLASS 5306

MS9536

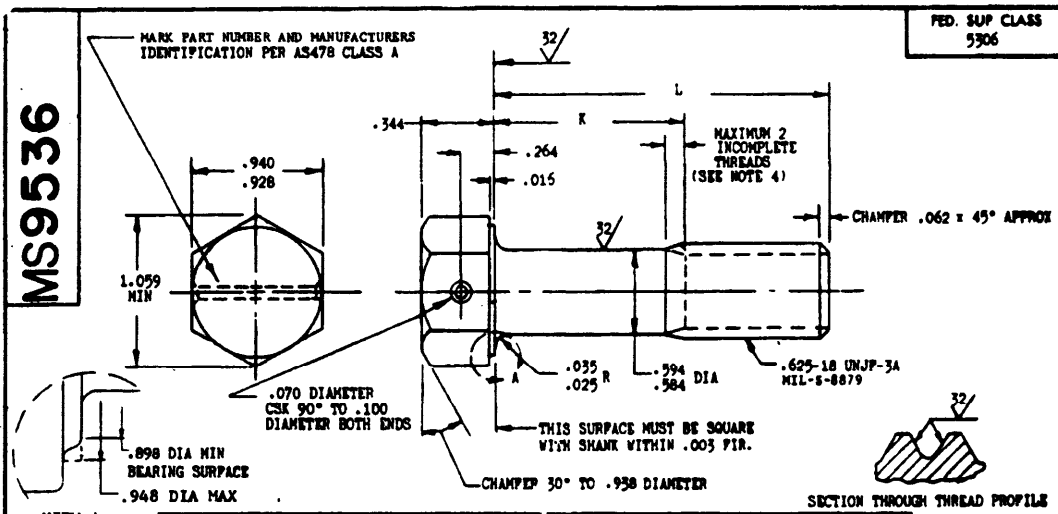

PART NUMBER	L	K	APPROX WEIGHT LB/100
MS9536-03	.938	.118-.138	14.53
MS9536-04	1.000	.118-.138	15.01
MS9536-05	1.062	.118-.138	15.49
MS9536-06	1.125	.118-.138	15.97
MS9536-07	1.188	.118-.138	16.45
MS9536-08	1.250	.118-.138	16.93
MS9536-09	1.312	.118-.138	17.41
MS9536-10	1.375	.118-.138	17.89
MS9536-11	1.438	.118-.138	18.36
MS9536-12	1.500	.118-.138	18.84
MS9536-13	1.562	.118-.138	19.32
MS9536-14	1.625	.118-.138	19.80
MS9536-15	1.688	.128-.188	20.28
MS9536-16	1.750	.190-.250	20.76
MS9536-17	1.812	.252-.312	21.24
MS9536-18	1.875	.315-.375	21.71
MS9536-19	2.000	.440-.500	22.67
MS9536-20	2.125	.565-.625	23.63
MS9536-21	2.250	.690-.750	24.59
MS9536-22	2.375	.815-.875	25.54
MS9536-23	2.500	.940-1.000	26.50
MS9536-24	2.625	1.065-1.125	27.46
MS9536-25	2.750	1.190-1.250	28.41
MS9536-26	2.875	1.315-1.375	29.37
MS9536-27	3.000	1.440-1.500	30.33
MS9536-28	3.125	1.565-1.625	31.28
MS9536-29	3.250	1.690-1.750	32.24
MS9536-30	3.375	1.815-1.875	33.20
MS9536-31	3.500	1.940-2.000	34.16
MS9536-32	3.625	2.065-2.125	35.11
MS9536-33	3.750	2.190-2.250	36.07
MS9536-34	3.875	2.315-2.375	37.03
MS9536-35	4.000	2.440-2.500	37.98
MS9536-36	4.125	2.565-2.625	38.94
MS9536-37	4.250	2.690-2.750	39.90
MS9536-38	4.375	2.815-2.875	40.86
MS9536-39	4.500	2.940-3.000	41.81
MS9536-40	4.625	3.065-3.125	42.77
MS9536-41	4.750	3.190-3.250	43.73
MS9536-42	4.875	3.315-3.375	44.68
MS9536-43	5.000	3.440-3.500	45.64
MS9536-44	5.125	3.565-3.625	46.60
MS9536-45	5.250	3.690-3.750	47.55
MS9536-46	5.375	3.815-3.875	48.51
MS9536-47	5.500	3.940-4.000	49.47
MS9536-48	5.625	4.065-4.125	50.43
MS9536-49	5.750	4.190-4.250	51.38
MS9536-50	5.875	4.315-4.375	52.34
MS9536-51	6.000	4.440-4.500	53.30

1. SHANK SHALL BE STRAIGHT WITHIN .002 PER INCH OF BOLT LENGTH.
2. THE CONCENTRICITY OF THREAD PD IN RELATION TO THE SHANK SHALL BE WITHIN .006 FIR.
3. THE CONCENTRICITY OF THE SHANK IN RELATION TO THE WASHER FACE DIAMETER AND HEXAGON SHALL BE WITHIN .020 FIR.
4. INCOMPLETE THREADS NOT TO ENTER FILLET.
5. MATERIAL: STEEL AMS 6322.
6. HARDNESS: ROCKWELL C26-32.
7. FINISH: CADMIUM PLATE PER AMS 2400. DIMENSIONS SPECIFIED ARE AFTER PLATING.
8. MAGNETIC PARTICLE INSPECTION PER AMS 2640.
9. MANUFACTURING SPECIFICATION: AMS 7452 EXCEPT HEAD MUST BE UPSET.
10. SURFACE TEXTURE: USAS B46.1-1962. UNLESS OTHERWISE SPECIFIED SURFACES TO BE 125 MICROINCHES, EXCEPT HEXAGON.
11. BREAK SHARP EDGES .003 - .015 UNLESS OTHERWISE SPECIFIED.
12. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: LINEAR DIMENSIONS ± .010, ANGULAR DIMENSIONS ± 5°.
13. DO NOT USE UNASSIGNED PART NUMBERS.

CERTAIN PROVISIONS OF THIS STANDARD ARE THE SUBJECT OF INTERNATIONAL STANDARDIZATION AGREEMENT ASCC AIR STD 17/2. WHEN REVISION OR CANCELLATION OF THIS STANDARD IS PROPOSED, THE DEPARTMENTAL CUSTODIANS WILL INFORM THEIR RESPECTIVE DEPARTMENTAL STANDARDIZATION OFFICES SO THAT APPROPRIATE ACTION MAY BE TAKEN RESPECTING THE INTERNATIONAL AGREEMENT CONCERNED.

· AS & AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC. PUBLICATIONS.
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE MILITARY SERVICES BY THE S.A.E. AEROSPACE PROPULSION DIVISION.

Reviewer activities:

This military standard has been approved by the Department of Defense and is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. USAF-11	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
Other Cust NAVY-AS ARMY-AV		BOLT, MACHINE-STEEL AMS 6322, CADMIUM PLATE, DRILLED, 1 HOLE, HEXAGON HEAD, .625-18 UNJF-3A	MS9536
PROCUREMENT SPECIFICATION NONE		SUPERSEDES:	SHEET 1 OF 1

APPROVED 2 Feb 1968 REVISED

DD FORM 672-1 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

☆ U. S. GOVERNMENT PRINTING OFFICE 1968-301-516-4203

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:19Z
Check the source to verify that this is the current version before use.