FED SUP CLASS
5306

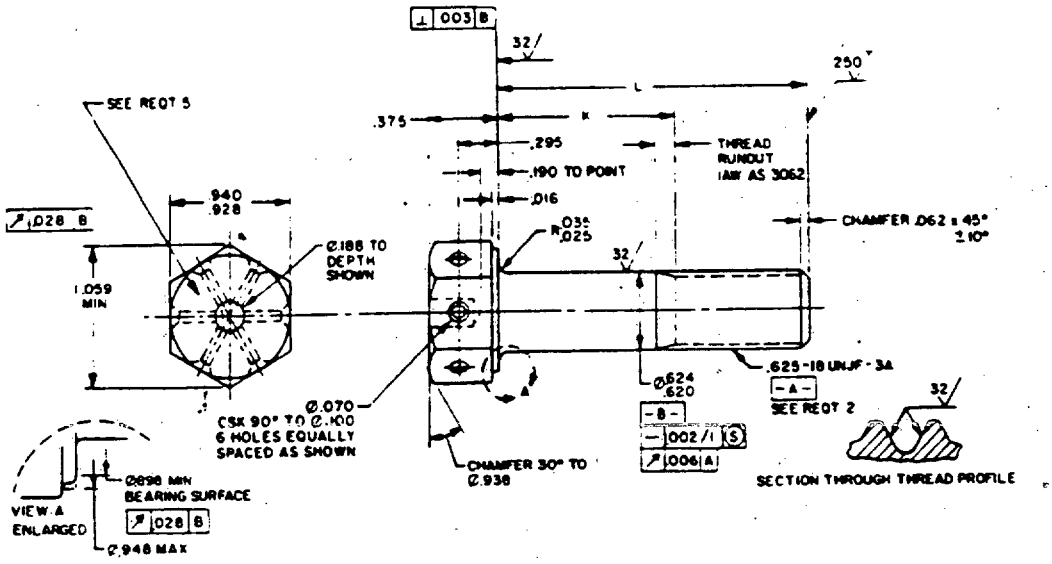


TABLE I. DASH NUMBERS AND DIMENSIONS

DASH NO	L	K	APPROX WEIGHT LB/100
-03	.938	.118-.138	15.95
-04	1.000	.118-.138	16.49
-05	1.062	.118-.138	17.03
-06	1.125	.118-.138	17.57
-07	1.188	.118-.138	18.12
-08	1.250	.118-.138	18.66
-09	1.312	.118-.138	19.20
-10	1.375	.118-.138	19.75
-11	1.438	.118-.138	20.29
-12	1.500	.118-.138	20.93
-13	1.562	.118-.138	21.37
-14	1.625	.118-.138	21.92
-15	1.688	.128-.188	22.47
-16	1.750	.190-.250	23.01
-17	1.812	.252-.312	23.55
-18	1.875	.315-.375	24.09
-19	2.000	.440-.500	25.16
-20	2.125	.565-.625	26.26
-21	2.250	.690-.750	27.35
-22	2.375	.815-.875	28.44
-23	2.500	.940-1.000	29.52
-24	2.625	1.065-1.125	30.61
-25	2.750	1.190-1.250	31.70
-26	2.875	1.315-1.375	32.78
-27	3.000	1.440-1.500	33.87

DASH NO	L	K	APPROX WEIGHT LB/100
-28	3.125	1.565-1.625	34.96
-29	3.250	1.690-1.750	36.04
-30	3.375	1.815-1.875	37.13
-31	3.500	1.940-2.000	38.22
-32	3.625	2.065-2.125	39.30
-33	3.750	2.190-2.250	40.39
-34	3.875	2.315-2.375	41.48
-35	4.000	2.440-2.500	42.56
-36	4.125	2.565-2.625	43.65
-37	4.250	2.690-2.750	44.73
-38	4.375	2.815-2.875	45.82
-39	4.500	2.940-3.000	46.91
-40	4.625	3.065-3.125	47.99
-41	4.750	3.190-3.250	49.08
-42	4.875	3.315-3.375	50.17
-43	5.000	3.440-3.500	51.25
-44	5.125	3.565-3.625	52.34
-45	5.250	3.690-3.750	53.43
-46	5.375	3.815-3.875	54.51
-47	5.500	3.940-4.000	55.60
-48	5.625	4.065-4.125	56.69
-49	5.750	4.190-4.250	57.77
-50	5.875	4.315-4.375	58.86
-51	6.000	4.440-4.500	59.95
-52	1.938	.378-.438	24.62

Ⓓ ENTIRE STANDARD REVISED

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

USER ACTIVITIES

REVIEWER ACTIVITIES
AIR FORCE – 82
ARMY – MI
DLA – IS

AMSC N/A

APPROVED 5 MAY 1965
REVISED Ⓓ 30 SEPT 87

PA	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
NAVY – AS		BOLT, MACHINE-HEXAGON HEAD, DRILLED, 6 HOLES, FULL SHANK, .625-18 UNJF-3A	MS9590
Other Cust: AIR FORCE-99			
PROCUREMENT SPECIFICATION: AMS7477	SUPERSEDES		PAGE 1 OF 2

DD FORM 672-1 (COORDINATED)


5306-1185

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:21Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. MATERIAL: CORROSION AND HEAT RESISTANT STEEL IN ACCORDANCE WITH AMS 5731 (UNS S66286).
2. THREADS: THREADS IN ACCORDANCE WITH MIL-S-8879. INCOMPLETE THREADS NOT TO ENTER FILLET.
3. FLUORESCENT PENETRANT INSPECTION: FLUORESCENT PENETRANT INSPECTION SHALL BE IN ACCORDANCE WITH AMS 2645.
4. SURFACE TEXTURE: SURFACE TEXTURE IN ACCORDANCE WITH ANSI B46.1. UNLESS OTHERWISE SPECIFIED, SURFACE TO BE 125 MICROINCHES EXCEPT UPSET HEAD.
5. MARKING: MARK PART NUMBER AND MANUFACTURER'S IDENTIFICATION IN ACCORDANCE WITH AS 478 CLASS A.
6. DIMENSIONING AND TOLERANCING: DIMENSIONING AND TOLERANCING SHALL BE IN ACCORDANCE WITH ANSI Y14.5M.
7. TOLERANCES: UNLESS OTHERWISE SPECIFIED, TOLERANCES SHALL BE FOR LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±2°.
8. EDGES: BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
9. PART NUMBER: THE PART NUMBER SHALL CONSIST OF THE BASIC MS NUMBER FOLLOWED BY A DASH NUMBER FROM TABLE 1.

EXAMPLE: MS9590-03



MS9590-03 INDICATES - BOLT, MACHINE-HEXAGON HEAD, DRILLED, 6 HOLES, FULL SHANK AMS 5731, .625-18 UNJF-3A x .938 LONG

NOTES:

1. ALL DIMENSIONS ARE IN INCHES.
2. DO NOT USE UNASSIGNED PART NUMBERS.
3. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.
4. REFERENCED GOVERNMENT (OR NON-GOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DoDISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.
5. THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE SAE AEROSPACE PROPULSION DIVISION.
6. AS AND AMS ARE SAE PUBLICATIONS.

USER ACTIVITIES:

REVIEWER ACTIVITIES:
AIR FORCE – 82
ARMY – MI
DLA – IS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

APPROVED 5 MAY 1965 REVISED (D) FOR CHANGES SEE PAGES 1 AND 2

P.A. NAVY – AS	INTERNATIONAL INTEREST	TITLE BOLT, MACHINE-HEXAGON HEAD, DRILLED,	MILITARY STANDARD
Other Cust AIR FORCE-99		6 HOLES, FULL SHANK, .625-18 UNJF-3A	MS9590
PROCUREMENT SPECIFICATION AMS7477	SUPERSEDES		PAGE 2 OF 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:21Z
Check the source to verify that this is the current version before use.