
MS9762 (ASG)

FED SUP CLASS 5306

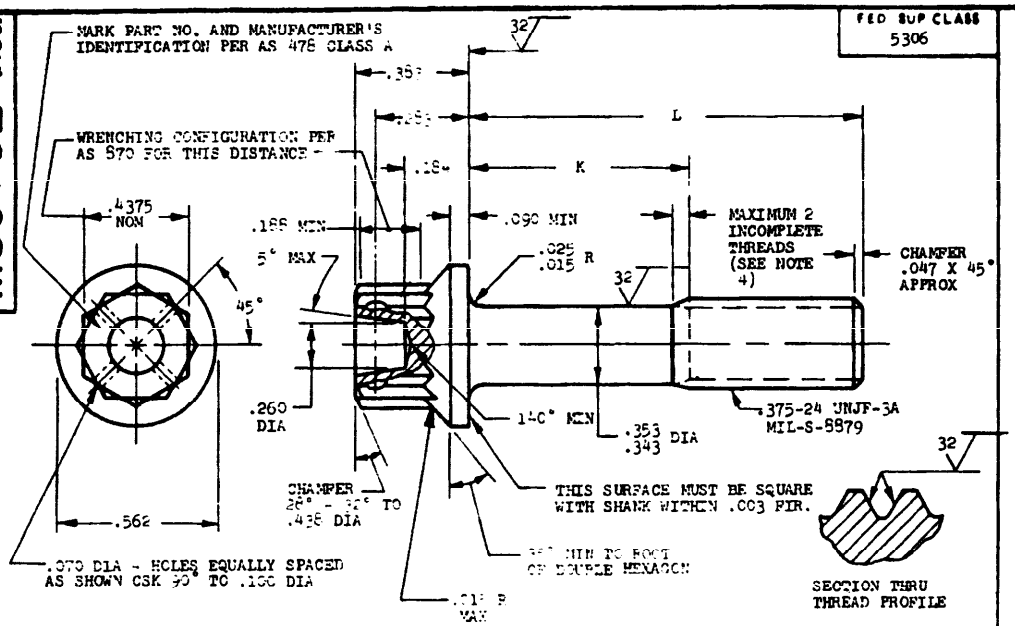

PART NO.	L	K	APPROX WEIGHT LB/100
MS9762-04	.625	.088-.108	1.64
MS9762-05	.688	.088-.108	3.05
MS9762-06	.750	.088-.108	3.14
MS9762-07	.812	.088-.108	3.23
MS9762-08	.875	.088-.108	3.33
MS9762-09	.938	.088-.108	3.42
MS9762-10	1.000	.088-.108	3.52
MS9762-11	1.062	.088-.108	3.61
MS9762-12	1.125	.088-.108	3.71
MS9762-13	1.188	.088-.108	3.80
MS9762-14	1.250	.088-.108	3.90
MS9762-15	1.312	.088-.108	3.99
MS9762-16	1.375	.088-.108	4.08
MS9762-17	1.438	.088-.108	4.18
MS9762-18	1.500	.088-.108	4.27
MS9762-19	1.562	.088-.108	4.37
MS9762-20	1.625	.088-.108	4.46

PART NO.	L	K	APPROX WEIGHT LB/100
MS9762-21	1.688	.088-.108	4.56
MS9762-22	1.750	.088-.108	4.65
MS9762-23	1.812	.088-.108	4.74
MS9762-24	1.875	.088-.108	4.84
MS9762-25	1.938	.088-.108	4.93
MS9762-26	2.000	1.000-1.020	5.03
MS9762-27	2.062	1.020-1.040	5.12
MS9762-28	2.125	1.040-1.060	5.22
MS9762-29	2.188	1.060-1.080	5.31
MS9762-30	2.250	1.080-1.100	5.41
MS9762-31	2.312	1.100-1.120	5.50
MS9762-32	2.375	1.120-1.140	5.60
MS9762-33	2.438	1.140-1.160	5.69
MS9762-34	2.500	1.160-1.180	5.79
MS9762-35	2.562	1.180-1.200	5.88
MS9762-36	2.625	1.200-1.220	5.98
MS9762-37	2.688	1.220-1.240	6.07
MS9762-38	2.750	1.240-1.260	6.17

PART NO.	L	K	APPROX WEIGHT LB/100
MS9762-39	2.812	2.810-2.830	6.26
MS9762-40	2.875	2.830-2.850	6.36
MS9762-41	2.938	2.850-2.870	6.45
MS9762-42	3.000	2.870-2.890	6.55
MS9762-43	3.062	2.890-2.910	6.64
MS9762-44	3.125	2.910-2.930	6.74
MS9762-45	3.188	2.930-2.950	6.83
MS9762-46	3.250	2.950-2.970	6.93
MS9762-47	3.312	2.970-2.990	7.02
MS9762-48	3.375	2.990-3.010	7.12
MS9762-49	3.438	3.010-3.030	7.21
MS9762-50	3.500	3.030-3.050	7.31
MS9762-51	3.562	3.050-3.070	7.40
MS9762-52	3.625	3.070-3.090	7.50
MS9762-53	3.688	3.090-3.110	7.59
MS9762-54	3.750	3.110-3.130	7.69
MS9762-55	3.812	3.130-3.150	7.78
MS9762-56	3.875	3.150-3.170	7.88
MS9762-57	3.938	3.170-3.190	7.97
MS9762-58	4.000	3.190-3.210	8.07

1. SHANK SHALL BE STRAIGHT WITHIN .002 PER INCH OF BOLT LENGTH.
2. THE RUNOUT OF THREAD PITCH IN RELATION TO THE SHANK SHALL BE WITHIN .005 FIR.
3. THE RUNOUT OF THE SHANK IN RELATION TO THE WASHER FACE DIAMETER AND DOUBLE HEXAGON SHALL BE WITHIN .003 FIR.
4. INCOMPLETE THREADS NOT TO ENTER FILLET.
5. MATERIAL: TITANIUM AMS 4967.
6. HARDNESS: ROCKWELL C36-42.
7. MANUFACTURING SPECIFICATION: AMS 7-61, EXCEPT MATERIAL AS NOTED.
8. FLUORESCENT PENETRANT INSPECTION PER AMS 2644.
9. SURFACE TEXTURE: USAS B46.1-1962. UNLESS OTHERWISE SPECIFIED, SURFACES TO BE 125 MICROINCHES EXCEPT UPSET HEAD.
10. BREAK SHARP EDGES .003-.010 UNLESS OTHERWISE SPECIFIED.
11. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMAL DIMENSIONS ±.010, ANGULAR DIMENSIONS ±1°.
12. DO NOT USE UNASSIGNED PART NUMBERS

AS & AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC. PUBLICATIONS.
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE MILITARY SERVICES BY THE DAF AEROSPACE PART STANDARDS DIV.

APPROVED [illegible] REVISED

P.A. [illegible]	TITLE	MILITARY STANDARD
Other Cust [illegible] Navy - AS	BOLT, MACHINE - DOUBLE HEXAGON EXTENDED WASHER HEAD, DRILLED, FF SHANK, TITANIUM AMS 4967, .375-2 UNJF-3A	MS9762 (ASG)
PROCUREMENT SPECIFICATION	SUPERSEDES:	SHEET [illegible] OF [illegible]

DD FORM 1 SEP 67 672-1 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

This military standard is approved by the Department of the Air Force and the Naval Air Systems Command and is mandatory for use by these activities. All other military activities are required to employ this standard where suitable.

Review activities: DSAF-82, 85

Source: https://assist.dla.mil -- Downloaded: 202610-23T13:24Z
Check the source to verify that this is the current version before use.