MILITARY SPECIFICATION

MOTOR, ALTERNATING CURRENT

This specification has been approved by the
Bureau of Naval Weapons, Department of the Navy.

1. SCOPE

1.1 Scope. - This specification describes the requirements for the procurement of four types of alternating current motors. The alternating current motors are hysteresis synchronous motors having two stator windings which are excited by alternating-current voltage and produce a rotating magnetic field, and a rotor on which a permanent magnet is mounted and which has no windings. Alternating current motor types I, II, and III are energized by 400-cycle power, and alternating current motor type IV is energized by 60-cycle power. Alternating current motor type I has an internal gear train to reduce the output shaft speed. The alternating current motors can be operated directly from two-phase power, and with an external capacitor from single-phase power.

1.2 Classification. - The alternating current motors shall be of the following types:

Type I	BUWEPS Drawing No. 1884873	Motor, Alternating Current, Internal Gear Head
Type II	BUWEPS Drawing No. 1884687	Motor-Alternating Current, Hysteresis Synchronous
Type III	BUWEPS Drawing No. 1885092	Motor, Alternating Current, Hysteresis Synchronous
Type IV	BUWEPS Drawing No. 1931448	Motor, Alternating Current

2. APPLICABLE DOCUMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:11Z
Check the source to verify that this is the current version before use.

2.1 The following specifications, standards, drawings, and publications, or such portion thereof as may be designated herein, of the issue in effect on the date of invitation for bids, form a part of this specification.

SPECIFICATIONS

FEDERAL

UU-P-268	Paper, Kraft, Untreated, Wrapping
QQ-A-355	Aluminum Alloy Plate and Sheet 2024
PPP-B-601	Boxes, Wood, Cleated-Plywood
PPP-B-621	Boxes, Wood, Nailed and Lock-corner
PPP-B-636	Boxes, Fiber

MILITARY

MIL-P-116	Preservation, Methods of
MIL-S-901	Shockproof Equipment Class HI (High Impact) Shipboard Application, Tests for
MIL-E-5272	Environmental Testing, Aeronautical and Associated Equipment, General Specification for
MIL-L-10547	Liners, Case, Waterproof
MIL-P-16298	Preservation, Packaging, Packing and Marking of Electronic Machines Having Rotating Parts and Associated Repair Parts
MIL-F-18870	Fire Control, Optical and Associated Equipment Intended for Shipboard Use, the General Specification for Design and Procurement of
MIL-W-21927	Weapons, Handling and Preparation for Delivery of; General Requirements for

Source: https://assist.dla.mil -- Downloaded: 20260-19T12:11Z
Check the source to verify that this is the current version before use.

STANDARDS

MILITARY

MIL-STD-106	Mathematical Symbols
MIL-STD-129	Marking for Shipment and Storage
MIL-STD-167	Mechanical Vibrations of Shipboard Equipment

DRAWINGS

NAVY DEPARTMENT

BUWEPS Dwg. No. 1884687	Motor-Alternating Current, Hysteresis Synchronous
BUWEPS Dwg. No. 1884873	Motor, Alternating Current, Internal Gear Head
BUWEPS Dwg. No. 1885092	Motor, Alternating Current, Hysteresis Synchronous
BUWEPS Dwg. No. 1981448	Motor, Alternating Current

PUBLICATIONS

BUREAU OF NAVAL WEAPONS

NAVWEPS OS 6341	Miscellaneous General Ordnance Design Requirements

(Copies of specifications, standards, drawings, and publications requested by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. - The following documents form a part of this specification. Unless otherwise indicated, the issue in effect on date of invitation for bids shall apply.

NATIONAL BUREAU OF STANDARDS PUBLICATION

Handbook H28	Screw-thread Standards for Federal Services

Source: https://assist.dla.mil -- Downloaded: 202610-19T12:11Z
Check the source to verify that this is the currentversion before use.

(Application for copies should be addressed to the Superintendent of Documents, Government Printing Office, Washington 25, D.C.)

AMERICAN GEAR MANUFACTURERS ASSOCIATION PUBLICATION

AGMA 207.04 — 20 Degree Involute Fine-Pitch System for Spur and Helical Gears

(Application for copies should be addressed to American Gear Manufacturers Association, 1 Thomas Circle, N.W., Washington 5, D.C.)

CONSOLIDATED CLASSIFICATION COMMITTEE PUBLICATION

Consolidated Freight Classification Rules

(Application for copies should be addressed to the Consolidated Classification Committee, 202 Union Station, Chicago 6, Ill.)

AMERICAN TRUCKING ASSOCIATION, INC. PUBLICATION

Motor Freight Classification Rules

(Application for copies should be addressed to the Issuing Officer, American Trucking Association, Inc., 1424 16th Street, N.W., Washington 6, D.C.)

3. REQUIREMENTS

3.1 General requirements.

3.1.1 Pre-production samples. - Unless otherwise specified in the contract or order, pre-production samples of the alternating current motor shall be manufactured using the methods and procedures proposed for the production lot. These samples will be tested as specified in section 4 herein and are for the purpose of determining that the contractor, prior to his starting production, is capable of producing items that comply with the technical requirements of the contract. Provision of samples shall be in accordance with 4.1.1.

3.1.2 Materials. - Unless otherwise specified in the contract, requisition, or order, all materials and purchased parts entering into the final assembly of the alternating current motor shall conform to the detailed requirements given on the applicable BUWEPS drawing, in the specifications listed thereon, and in Specification MIL-F-18870.

Source: https://assist.dla.mil -- Downloaded: 20260-19T12:11Z
Check the source to verify that this is the current version before use.

3.1.3 Finishes, coatings, construction, and dimensions. - Finishes, coatings, construction, and dimensions for the alternating current motor shall be in accordance with the applicable BUWEPS drawing, and with the specifications and publications listed thereon.

3.1.4 Moisture, fungus, and corrosion. - The alternating current motors shall be rendered moisture, fungus, and corrosion resistant in accordance with detail requirements specified on the applicable BUWEPS drawing, and in the specifications listed thereon.

3.1.5 Marking. - Marking of assemblies shall be in accordance with the applicable BUWEPS drawing.

3.1.6 Gages. - The contractor shall provide himself with whatever gages are necessary and adequate to ensure that the material to which this specification applies will meet the requirements shown on the applicable drawings. If so stipulated in the contract, order, or requisition, the Government will furnish drawings of pertinent Navy Final Inspection Gages for guidance in the design of the contractor's inspection gages. However, such procedure shall not relieve the contractor of his responsibility in the design and manufacture of such gages as may be required for the satisfactory fulfillment of the contract requirements, but is intended to facilitate acceptance of all components and assemblies by Navy Final Inspection Gages.

3.1.7 Threads. - Unless otherwise specified, all threads shall be in accordance with the National Bureau of Standards Handbook H28. The class or fit for threads shall be as specified on the applicable drawings, and the NOT-GO gaging practice shall be as set forth in the aforementioned Handbook H28.

3.1.8 Requests for deviation. - Each request that a deviation be authorized shall have been submitted to the Procuring Activity, and the deviation shall have been authorized by the Bureau of Naval Weapons or by a Naval Activity delegated such authority, prior to the production of the affected item, or prior to the performance of a particular operation on the item. The deviation shall apply only to this specific item or operation. The request shall define the suggested deviation in sufficient detail to permit the Procuring Activity to evaluate its effect on performance and reliability, and the reasons for the suggested deviation shall be stated. Each request that a deviation be authorized, and the authorization, shall state specifically the extent of the departure, the identifying number of the item, the contractor (or bidder) and the contract number. A deviation is essentially temporary in character, and usually represents a departure limited to a specific period, to a specific number of items, or to the contract to which it applies. It may require a equitable reduction in contract price if a decrease in the cost of performance results therefrom.

Source: https://assist.dla.mil -- Downloaded: 20260-19T12:11Z
Check the source to verify that this is the current version before use.

3.1.9 Conflicting requirements. - Conflicting requirements arising between this specification or any specification, publication, or drawing listed herein shall be referred in writing to the procuring agency or appointed agent for interpretation, clarification, and resolution (or correction).

3.2 Definitions. - Definitions applicable to this specification and associated drawings are as follows:

3.2.1 Continuous duty synchronous motor. - A synchronous motor designated to operate with rated torque output at the highest specified operating ambient temperature for an indefinite period without exceeding the safe temperature limits for the insulation and lubricant used in its fabrication.

3.2.2 Synchronous speed. - Synchronous speed is the rotor speed which is determined by the equation: $N = 120\ F/P$, where N is the rotor speed in revolutions per minute, F is the frequency of the excitation voltage in cycles per second, and P is the number of poles. Mathematical symbols shall be interpreted in accordance with Standard MIL-STD-106.

3.2.3 Shaft synchronous speed. - Shaft synchronous speed is equal to synchronous speed divided by the motor gear train speed reduction ratio when the motor has an internal gear train. If the motor has no internal gear train, shaft synchronous speed is the same as synchronous speed. See 3.2.2.

3.2.4 Rated torque output. - Rated output torque is a specified value of shaft torque, at which it is required that the rotor slip speed be zero.

3.2.5 Ambient temperature. - Ambient temperature is the temperature of the air surrounding the unit, measured along the shaft axis 1.5 plus 1.0 inch away from the end of the unit opposite the shaft.

3.2.6 Temperature rise. - Winding temperature rise (degrees centigrade) is given by:

$$(234.5 + T_C)\ \frac{R_H - R_C}{R_C}$$

where R_H = resistance of the windings at temperature T_H,
R_C = resistance of the windings at temperature T_C,
T_H = temperature of windings when energized (degrees centigrade),
T_C = ambient temperature.

Source: https://assist.dla.mil -- Downloaded: 202610-19T12:11Z
Check the source to verify that this is the current version before use.

3.2.7 Tropical environment. - Tropical environment is defined as conditions of high humidity, high temperatures, and spore exposure, which present an opportunity for fungi growth.

3.3 Performance requirements and product characteristics. - The alternating current motor shall meet the following performance requirements and product characteristics:

3.3.1 Mechanical requirements.

3.3.1.1 End play. - When measured in accordance with 4.4.4.1, the end play of the shaft shall meet the requirements of the applicable BUWEPS drawing.

3.3.1.2 Radial play. - When measured in accordance with 4.4.4.2, the radial play of the shaft shall meet the requirements of the applicable BUWEPS drawing.

3.3.1.3 Perpendicularity. - When measured in accordance with 4.4.4.3, the axial run-out of each mounting face shall not exceed 0.001 inch total indicator reading per inch of mounting face diameter.

3.3.1.4 Concentricity. - When measured in accordance with 4.4.4.4, the radial run-out of each mounting diameter of alternating current motor types I, III, and IV shall meet the requirements of the applicable BUWEPS drawing.

3.3.1.5 Shaft run-out. - When measured in accordance with 4.4.4.5, the run-out of the shaft for alternating current motor types I, III, and IV shall meet the requirements of the applicable BUWEPS drawing.

3.3.1.6 Pinion. - The pinion gear teeth of alternating current motor type II shall conform to ACMA 207.04.

3.3.1.6.1 Pitch diameter run-out. - When measured in accordance with 4.4.4.6.1, the pitch diameter run-out of alternating current motor type II shall not exceed 0.001 inch total indicator reading.

3.3.1.6.2 Total composite error. - When measured in accordance with 4.4.4.6.2, the total composite error of alternating current motor type II shall meet the requirements of BUWEPS drawing 1884687.

3.3.1.6.3 Center distance. - When measured in accordance with 4.4.4.6.3, the center distance of alternating current motor type II shall meet the requirements of BUWEPS drawing 1884687.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:11Z
Check the source to verify that this is the current version before use.

3.3.2 Electrical requirements.

3.3.2.1 Dielectric strength and insulation resistance.

3.3.2.1.1 Dielectric strength. - When tested in accordance with 4.4.4.7.1, the alternating current motor shall withstand the dielectric test voltage specified in 4.4.4.7.1 without damage, arcing, or breakdown.

3.3.2.1.2 Insulation resistance. - When measured in accordance with 4.4.4.7.2, the minimum insulation resistance between each winding and the housing and between the two windings shall meet the requirements of table I.

3.3.2.2 Direction of rotation. - When checked in accordance with 4.4.4.8, the direction of shaft rotation shall be as specified on the applicable BUWEPS drawing.

3.3.2.3 Speed at no torque load. - When measured in accordance with 4.4.4.9, the shaft speed shall be equal to shaft synchronous speed.

3.3.2.4 Speed at rated torque load. - When measured in accordance with 4.4.4.10, the shaft speed shall be equal to shaft synchronous speed.

3.3.2.5 Input current and power at rated torque output. - When measured in accordance with 4.4.4.11, the input current and power to the alternating current motor shall meet the requirements of table I.

3.4 Environmental requirements. - The alternating current motor shall meet the other applicable requirements of this specification during or after tests defined or specified in 4.5.

3.4.1 Vibration

3.4.1.1 Vibration, transportation. - The alternating current motor shall be capable of withstanding the vibration tests specified in 4.5.1.1, and thereafter shall show no damage and shall meet all the requirements of section 3.

3.4.1.2 Vibration, operating condition. - The alternating current motor shall withstand the Type I vibration requirements specified in Standard MIL-STD-167, shall function during and after vibration tests, and thereafter shall show no damage and shall meet all the performance requirements and product characteristics of this specification.

3.4.2 Shock

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:11Z
Check the source to verify that this is the current version before use.

3.4.2.1 Shock, transportation, storage and handling. - The alternating current motor shall be capable of withstanding the shock tests specified in 4.5.2.1, and thereafter shall show no damage and shall meet all the requirements of section 3.

3.4.2.2 Shock, non-operating condition. - The alternating current motor shall withstand the Type A shock requirements specified in Specification MIL-S-901, and thereafter shall show no damage and shall meet all the performance requirements and product characteristics of this specification.

3.4.3 Temperature

3.4.3.1 Temperature, operating condition. - The alternating current motor shall withstand operational ambient temperatures of between minus 4 degrees Fahrenheit (minus 20 degrees centigrade) and 185 degrees Fahrenheit (85 degrees centigrade) in accordance with Specification MIL-F-18870, shall function during and after temperature tests, and thereafter shall show no damage or corrosion and shall meet all the performance requirements and product characteristics of this specification.

3.4.3.2 Temperature, non-operating condition. - The alternating current motor shall withstand storage temperatures of between minus 80 degrees Fahrenheit (minus 62 degrees centigrade) and 185 degrees Fahrenheit (85 degrees centigrade) in accordance with Condition II of QS 6341, and thereafter shall show no corrosion or damage and shall meet all the performance requirements and product characteristics of this specification.

3.4.4 Humidity. - The alternating current motor shall withstand operational ambient humidities in accordance with Specification MIL-F-18870, and thereafter shall show no corrosion or damage and shall meet all the performance requirements and product characteristics of this specification.

3.4.5 Tropical environment. - The alternating current motor shall withstand the tropical environmental conditions specified in Specification MIL-E-5272 under "Fungus Resistance Tests", and thereafter shall show no fungus growth, corrosion, or other damage, and shall meet all the performance requirements and product characteristics of this specification.

3.4.6 Pinion hardness. - When measured in accordance with 4.5.6, the hardness of the pinion of alternating motor type II shall be 28 minimum on the Rockwell C scale.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:11Z
Check the source to verify that this is the current version before use.

3.4.7 Temperature rise at rated torque output. - When measured in accordance with 4.5.7, the temperature rise shall meet the requirements of table I.

3.4.8 Operating life. - The alternating current motor shall withstand the operating life test described in 4.5.8, and thereafter shall meet all the performance requirements and product characteristics of this specification.

3.5 Clean-up. - Prior to and after final assembly, all parts, components and the assembly shall be thoroughly cleaned of loose, spattered, or excess solder, metal chips, and other foreign matter. Burrs and sharp edges, as well as rosin flash, shall be removed.

3.6 Workmanship. - The equipment, including all parts and accessories, shall be constructed and finished in a manner to assure compliance with all requirements of this specification. Particular attention shall be paid to neatness and thoroughness of soldering, marking of parts, and assemblies, riveting, machine screw assemblage, and freedom of parts from burrs and sharp edges.

3.6.1 The workmanship exhibited in the pre-production sample will be evaluated to determine acceptability. The approved standards of workmanship will thereby become a minimum production requirement for all units offered for acceptance.

4. QUALITY ASSURANCE PROVISIONS

4.1 Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own or any other commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Pre-production sample. - Unless otherwise specified for each contract or order, a representative sample of one alternating current motor shall be manufactured by the methods and procedures proposed for the production lot. It shall be submitted for pre-production tests at an activity designated by the Bureau of Naval Weapons, for purposes of determining compliance with the requirements of the contract, specifications, and drawings. Further production of the item by the contractor prior to approval of the contracting activity on the completion of tests on the pre-production samples shall be at the contractor's risk. Pre-production samples accepted will be applied as part of the quantity specified by the contract or order, but shall not be used in any equipment manufactured for the Government.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:11Z
Check the source to verify that this is the current version before use.

4.1.2 Periodic production samples. - The tests of 4.4 and 4.5 shall be performed in steps as specified below. Periodic production samples accepted will be applied as part of the quantity specified by the contract or order, but shall not be used in any equipment manufactured for the Government.

Step 1. - Upon initiation of production, select one (1) unit from each group of ten (10) units for submission to an activity designated by the procuring agency.

Step 2. - Upon satisfactory compliance of each unit from three (3) consecutive groups, select one (1) unit from each group of twenty-five (25).

Step 3. - Upon satisfactory compliance of each unit from three (3) consecutive groups, select one (1) unit from each group of fifty (50) units. Continue this procedure until a defective unit is found.

Step 4. - When a defective unit is found in any group, the group represented by the sample shall be rejected. Shift to step 1 and proceed as indicated. Disposition of groups represented by failing samples shall be made by the Government.

4.2 Classification of tests. - The inspection and testing of the alternating current motor shall be classified as follows:

4.2.1 Acceptance tests. - These tests shall be accomplished on each alternating current motor submitted for acceptance under contract. These tests are detailed in 4.4.

4.2.2 Pre-production and periodic production tests. - Pre-production and periodic production tests shall be accomplished on samples selected as specified in 4.1.1 and 4.1.2 which are representative of the production of the alternating current motor after the award of the contract, to determine that the production meets the requirements of this specification. These tests are detailed in 4.5. Acceptance shall be based on no defects in the sample. Failure of the sample to comply with these requirements will result in the rejection of the lot or the cessation of production, as determined by the procuring activity.

4.2.3 Tests after delivery. - Unless otherwise specified in the contract, the Government reserves the right to conduct any or all the tests specified herein, as deemed necessary, after installation of the alternating current motor. Any defects discovered during or after these tests due to the contractor's failure to comply with drawings or specifications for this equipment shall be corrected by the contractor at no [illegible] to the Government, provided the contractor is notified of such [illegible] within the guarantee period of the contract.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:11Z
Check the source to verify that this is the current version before use.

4.3 Test equipment.- The following items of test equipment are required to perform the acceptance tests set forth in this specification:

4.3.1 End play tester.- An end play tester or bench lathe capable of securing the Alternating Current Motor in a vertical or horizontal position and mounting a dial indicator.

4.3.2 Center distance tester.- A test fixture capable of securing Alternating Current Motor type II in a vertical position, mounting a dial indicator, and measuring center distance to an accuracy of plus or minus 0.0002 inch. The standard inspection master gear of the center distance tester shall be that specified on the applicable BUWEPS drawing, and a constant force of 8 ounces shall be maintained between the pinion and the standard inspection master gear.

4.3.3 Dial indicator.- A dial indicator which can be mounted on the testers of 4.3.1 and 4.3.2, and which measures with an accuracy of plus or minus 0.0001 inch.

4.3.4 Mechanical loads.

4.3.4.1 Reversing 3-ounce load.- A reversing 3-ounce load which can be applied axially to the shaft of the Alternating Current Motor.

4.3.4.2 Reversing 1/2-pound load.- A reversing 1/2-pound load which can be applied radially to the shaft of the Alternating Current Motor.

4.3.4.3 Reversing 1-pound load.- A reversing 1-pound load which can be applied axially to the shaft of the Alternating Current Motor.

4.3.4.4 Low speed, high torque dynamometer.- A dynamometer capable of applying a torque of 25 ounce-inches at a speed of 5 revolutions per minute, and having an accuracy of plus or minus 5 percent.

4.3.4.5 High speed, low torque dynamometer.- A dynamometer capable of applying torque in the range of 0.2 to 0.8 ounce-inch at speeds up to 10,000 rpm, and having an accuracy of plus or minus 5 percent.

4.3.5 Heat sinks.

4.3.5.1 Alternating Current Motor types I and III.- The heat sink shown in figure 1 for Alternating Current Motor types I and III.

4.3.5.2 Alternating Current Motor type II.- The heat sink shown in figure 1 for Alternating Current Motor type II.

Source: https://assist.dla.mil -- Downloaded: 202610-19T12:11Z
Check the source to verify that this is the current version before use.

4.3.5.3 Alternating Current Motor type IV.- The heat sink shown in figure 1 for Alternating Current Motor type IV.

4.3.6 High-potential tester.- A high-potential tester capable of applying up to 1000 volts root-mean-square (r.m.s.), 60 cycles per second. The rate of change of output voltage shall not exceed 75 volts per second when the unit is turned on or off.

4.3.7 Insulation resistance tester.- An insulation resistance tester capable of applying 500 volts direct current, and measuring resistance up to 100 megohms.

4.3.8 Power sources.

4.3.8.1 400-cycle motor power supply.- A 400-cycle, single-phase power supply having the following characteristics:

(a) Volt-ampere rating.- 25 volt-amperes minimum,
(b) Voltage.- 36 volts plus or minus 2 percent,
(c) Frequency.- 400 cycles per second plus or minus 1.5 percent,
(d) Waveform.- Sinusoidal, with harmonic content not greater than 5 percent of the voltage of fundamental frequency.

4.3.8.2 60-cycle motor power supply.- A 60-cycle, single-phase power supply having the following characteristics:

(a) Volt-ampere rating.- 25 volt-amperes minimum,
(b) Voltage.- 40 volts plus or minus 2 percent,
(c) Frequency.- 60 cycles per second plus or minus 1.5 percent,
(d) Waveform.- Sinusoidal, with harmonic content not greater than 5 percent of the voltage of fundamental frequency.

4.3.8.3 60-cycle equipment power supply.- A 60-cycle power source capable of supplying adequate volt-amperes to any 60-cycle test equipment used in conducting the tests of this specification. The voltage shall be 115 plus or minus 2 volts, the frequency 60 plus or minus 3 cycles per second, and the waveform shall be sinusoidal with harmonic content not greater than 5 percent of the voltage of fundamental frequency.

4.3.9 Meters.

4.3.9.1 Voltmeter.- An alternating-current voltmeter, 50 volts full scale, having an accuracy of plus or minus 1 percent of full scale, and an input impedance not less than 1000 ohms per volt.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:11Z
Check the source to verify that this is the current version before use.

4.3.9.2 Milliammeter.- An alternating-current milliammeter, 500 milliamperes full scale, having an accuracy of plus or minus 2 percent of full scale, and an impedance not greater than 0.15 ohm.

4.3.9.3 Wattmeter.- A wattmeter capable of measuring up to 15 watts which can be used with voltages up to 50 volts and currents up to 0.5 ampere, and which has an accuracy of plus or minus 2 percent of full scale.

4.3.10 Decade capacitor.- A decade capacitor which can be set so that its capacitance equals within plus or minus 3 percent the nominal capacitance of the phase-shifting capacitor shown on the applicable BUWEPS drawing in the circuit for checking direction of rotation.

4.3.11 Stopwatch.- A stopwatch capable of measuring lengths of time up to 15 minutes minimum, calibrated to 0.2 second, which does not gain or lose time at a rate greater than one minute in 24 hours.

4.3.12 Stroboscope.- A stroboscope, suitable for observing shaft speed up to 10,000 revolutions per minute, which has provision for external triggering.

4.3.13 Wave shapers.

4.3.13.1 400-cycle wave shaper.- A device capable of converting the output voltage of the 400-cycle motor power supply of 4.3.8.1 to an output pulse train having pulse repetition rate equal to one-third the frequency of the input wave, and wave shape and amplitude suitable for triggering the stroboscope of 4.3.12.

4.3.13.2 60-cycle wave shaper.- A device capable of converting the output voltage of the 60-cycle motor power supply of 4.3.8.2 to an output pulse train having pulse repetition rate equal to the frequency of the input wave, and wave shape and amplitude suitable for triggering the stroboscope of 4.3.12.

4.4 Acceptance tests.

4.4.1 The contractor shall conduct acceptance tests as specified in 4.2.1 to assure that the alternation current Motor is in compliance with the requirements of 3.1, 3.3, 3.5, and 3.6. Manufacturer's certification of materials specified in the applicable drawings shall be used in lieu of material tests.

4.4.2 Test conditions.- Unless otherwise specified, the Alternating Current Motor shall be subjected to acceptance tests under the following conditions:

Source: https://assist.dla.mil -- Downloaded: 20260-19T12:11Z
Check the source to verify that this is the current version before use.

4.4.2.1 Temperature: Room ambient 65 to 95 degrees Fahrenheit (18 to 35 degrees centigrade).

4.4.2.2 Altitude: Normal ground atmospheric pressure.

4.4.2.3 Vibration: None.

4.4.2.4 Humidity: Room ambient to 95 percent relative maximum.

4.4.3 Test and inspection equipment and facilities.- The manufacturer shall furnish and maintain all necessary test equipment, facilities, and personnel for performing all acceptance tests. The test equipment shall be adequate in quantity, and unless definite requirements are specified, shall be of sufficient accuracy and quality to permit performance of the required acceptance tests.

4.4.4 Test procedure.- The detailed test procedure listed in the following paragraphs shall be followed.

4.4.4.1 End play.- With the Alternating Current Motor mounted horizontally in the tester of 4.3.1, the housing held stationary, and the indicator of 4.3.3 mounted to measure axial movement of the shaft, the reversing load specified below shall be applied axially to the shaft, and the total indicator reading shall be observed to determine compliance with the requirements of 3.3.1.1.

Alternating Current Motor Type	Reversing Axial Load
I	3 ounce (See 4.4.4.1)
II	3 ounce (See 4.4.4.1)
III	3 ounce (See 4.4.4.1)
IV	1 pound (See 4.4.4.3)

4.4.4.2 Radial play.- With the Alternating Current Motor mounted horizontally in the tester of 4.3.1, the housing held stationary, and the indicator of 4.3.3 mounted to measure radial movement of the shaft 1/8 inch from the face of the bearing, the reversing 1/2-pound load of 4.3.4.2 shall be applied radially to the shaft 1/4 inch from the face of the bearing, and total indicator reading shall be observed to determine compliance with the requirements of 3.3.1.2.

4.4.4.3 Perpendicularity.- The following procedure shall be followed for each mounting face. With the Alternating Current Motor mounted vertically in the tester of 4.3.1, the shaft held stationary,

Source: https://assist.dla.mil -- Downloaded: 202610-19T12:11Z
Check the source to verify that this is the current version before use.

CLASSIFICATION IS UNLIMITED

and the indicator of 4.3.3 mounted to measure axial movement of the mounting face not more than 0.062 inch from its outside diameter, the housing shall be rotated by hand, and the total indicator reading shall be as noted to determine compliance with the requirements of 3.3.1.3.

4.4.4.4 Concentricity.- The following procedure shall be followed for each mounting diameter of Alternating Current Motor types I, III, and IV. With the Alternating Current Motor mounted vertically in the tester of 4.3.1, the shaft held stationary, and the indicator of 4.3.3 mounted to measure radial movement of the mounting diameter, the housing shall be rotated by hand and the total indicator reading shall be noted to determine compliance with the requirements of 3.3.1.4.

4.4.4.5 Shaft run-out.- With Alternating Current Motor type I, III, or IV mounted in the tester of 4.3.1, the housing held stationary, and the indicator of 4.3.3 mounted to measure radial movement of the shaft 1/8 inch from the end of the shaft, the shaft shall be rotated by hand, and the total indicator reading shall be observed to determine compliance with the requirements of 3.3.1.5.

4.4.4.6 Pinion.- The following procedure shall be followed to determine compliance with the requirements of 3.3.1.6. The tests of 4.4.4.6.1, 4.4.4.6.2, and 4.4.4.6.3 need not be performed separately, as the test of 4.4.4.6.3 supplies the data required for 4.4.4.6.1, 4.4.4.6.2, and 4.4.4.6.3.

4.4.4.6.1 Pitch diameter run-out.- With Alternating Current Motor type II mounted vertically in the tester of 4.3.2, the housing held stationary, and the indicator of 4.3.3 mounted to measure radial movement of the standard inspection master gear, the pinion shall be rotated by hand, and the total indicator reading shall be observed to determine compliance with the requirements of 3.3.1.6.1.

4.4.4.6.2 Total composite error.- With Alternating Current Motor type II mounted vertically in the tester of 4.3.2, the housing held stationary, and the indicator of 4.3.3 mounted to measure radial movement of the standard inspection master gear, the maximum and minimum indicator reading obtained as the shaft is rotated by hand shall be noted for three different positions of the housing 120 degrees apart, and the difference between the smallest and the largest of the six indicator readings obtained shall be noted to determine compliance with the requirements of 3.3.1.6.2.

4.4.4.6.3 Center distance.- With Alternating Current Motor type II mounted vertically in the tester of 4.3.2, the housing held stationary, and the indicator of 4.3.3 mounted to measure radial movement of the

Source: https://assist.dla.mil -- Downloaded: 202610-19T12:11Z
Check the source to verify that this is the current version before use.

standard inspection master gear, the maximum and minimum center distance obtained as the shaft is rotated by hand shall be noted for three different positions of the housing 120 degrees apart, and the smallest and the largest of the six center distance readings obtained shall be noted to determine compliance with the requirements of 3.3.1.6.3.

Note 1.- For the tests of 4.4.4.7 through 4.4.4.11, the following conditions shall obtain.

1. Mounting.

(a) Alternating Current Motor types I and III shall be mounted on the heat sink of 4.3.5.1,
(b) Alternating Current Motor type II shall be mounted on the heat sink of 4.3.5.2,
(c) Alternating Current Motor type IV shall be mounted on the heat sink of 4.3.5.3,
(d) The heat sink shall be mounted on a heat-insulating base,
(e) The mounted Alternating Current Motor shall be shielded from room air currents.

2. Environmental conditions.

(a) Ambient temperature.- 68 to 86 degrees Fahrenheit (20 to 30 degrees centigrade),
(b) Atmospheric pressure.- 30 plus or minus 2 inches of mercury,
(c) Vibration.- None,
(d) Relative humidity.- 75 percent maximum.

3. Connections.- The Alternating Current Motor shall be energized in accordance with the schematic for checking direction of rotation given on the applicable BUWEPS drawing, using the power supply of 4.3.8.1 or 4.3.8.2, as applicable, and the decade capacitor of 4.3.10.

4. Warm-up.- The Alternating Current Motor shall be given a warm-up period of one hour, connected as specified above.

5. Application of torque load.- Except for the tests of 4.5.10 and 4.5.11, torque load shall be applied as briefly as possible to avoid increasing the temperature of the Alternating Current Motor from its temperature at the end of the warm-up period.

4.4.4.7 Dielectric strength and insulation resistance.

4.4.4.7.1 Dielectric strength.- Using the high-potential tester of

Source: https://assist.dla.mil -- Downloaded: 202610-19T12:11Z
Check the source to verify that this is the current version before use.

cycles per second, and E is the number of volts. Mathematical symbols used

4.3.6, the following voltages shall be applied for 15 plus or minus 5 seconds (with no other connections made to the Alternating Current Motor) while observing the Alternating Current Motor to determine compliance with the requirements of 3.3.2.1.1. The high-potential voltages specified below are for testing by the vendor of the Alternating Current Motor. Testing by users of the Alternating Current Motor shall be at 80 percent of these voltages. Excessive high-potential testing should be avoided.

(a) Winding to housing.- 500 volts r.m.s. for windings rated at 60 volts r.m.s. or less, 1000 volts r.m.s. for windings rated at greater than 60 volts r.m.s.,

(b) Winding to winding.- 500 volts r.m.s. when both windings are rated at 60 volts r.m.s. or less, 1000 volts r.m.s. when either or both windings are rated at greater than 60 volts r.m.s.

4.4.4.7.2 Insulation resistance.- Immediately after application of high-potential voltage in accordance with 4.4.4.7.1, the insulation resistance shall be measured between each winding and every other winding and between each winding and the housing, using the insulation resistance tester of 4.3.7, to determine compliance with the requirements of 3.3.2.1.2.

4.4.4.8 Direction of rotation.- With the Alternating Current Motor connected in accordance with note 1, the direction of shaft rotation shall be noted to determine compliance with the requirements of 3.3.2.2.

4.4.4.9 Speed at no torque load.

4.4.4.9.1 Alternating Current Motor type I.- With Alternating Current Motor type I connected in accordance with note 1, the stopwatch of 4.3.11 shall be used to measure the time required for the shaft to make exactly 50 revolutions. The output speed shall be computed by dividing 50 by the measured length of time to determine compliance with the requirements of 3.3.2.3.

4.4.4.9.2 Alternating Current Motor types II and III.- With Alternating Current Motor types II and III connected in accordance with note 1, and the shaft illuminated by the stroboscope of 4.3.12 triggered by the wave shaper of 4.3.13.1, the shaft shall be observed for any indication of slip to determine compliance with the requirements of 3.3.2.3.

4.4.4.9.3 Alternating Current Motor type IV.- With Alternating Current Motor type IV connected in accordance with note 1, and the shaft illuminated by the stroboscope of 4.3.12 triggered by the wave shaper of 4.3.13.2, the shaft shall be observed for any indication of slip to

Source: https://assist.dla.mil -- Downloaded: 20260-19T12:11Z
Check the source to verify that this is the current version before use.

determine compliance with the requirements of 3.3.2.3.

4.4.4.10 Speed at rated torque load.

4.4.4.10.1 Alternating current motor type I. - With alternating current motor type I connected in accordance with note 1, and the dynamometer of 4.3.4.4 used to apply rated torque output as specified on BUWEPS drawing 1884873, the stopwatch 4.3.11 shall be used to measure the time required for the shaft to make exactly 50 revolutions. The output speed shall be computed by dividing 50 by the measured length of time to determine compliance with the requirements of 3.3.2.4.

4.4.4.10.2 Alternating current motor types II and III. - With alternating current motor types II and III connected in accordance with note 1, the dynamometer of 4.3.4.5 used to apply rated torque output as specified on the applicable BUWEPS drawing, and the shaft illuminated by the stroboscope of 4.3.12 triggered by the wave shaper of 4.3.13.1, the shaft shall be observed for any indication of slip to determine compliance with the requirements of 3.3.2.4.

4.4.4.10.3 Alternating current motor type IV. - With alternating current motor type IV connected in accordance with note 1, the dynamometer of 4.3.4.5 used to apply rated torque output as specified on the applicable BUWEPS drawing, and the shaft illuminated by the stroboscope of 4.3.12 triggered by the wave shaper of 4.3.13.2, the shaft shall be observed for any indication of slip to determine compliance with the requirements of 3.3.2.4.

4.4.4.11 Input current and power at rated torque output. - With the alternating current motor connected in accordance with note 1, and the dynamometer of 4.3.4.4 or 4.3.4.5, as applicable, used to apply rated torque output as specified on the applicable BUWEPS drawing, the input current and power to the alternating current motor shall be measured, using the milliammeter of 4.3.9.2 and the wattmeter of 4.3.9.3, to determine compliance with the requirements of 3.3.2.5.

4.4.5 Preservation, packing and packaging. - Preservation, packing and packaging of the alternating current motor shall conform to section 5 of this specification.

4.5 Pre-production and periodic production sample tests.

4.5.1 Vibration

Source: https://assist.dla.mil -- Downloaded: 202610-19T12:11Z
Check the source to verify that this is the current version before use.

4.5.1.1 Vibration, transportation. - The alternating current motor, packaged and packed as specified in section 5, shall be vibration tested as specified in Specification MIL-W-21927.

4.5.1.2 Vibration, operating condition. - The alternating current motor, rigidly mounted in a suitable vibration fixture, shall be subjected to vibration tests so as to meet the requirements specified in 3.4.1.2 and shall meet all the performance requirements and product characteristics of this specification during and after the vibration tests.

4.5.2 Shock

4.5.2.1 Shock, transportation, storage and handling. - The alternating current motor, packaged and packed as defined in section 5, shall be subjected to the appropriate rough handling tests specified in Specification MIL-W-21927.

4.5.2.2 Shock, non-operating condition. - The alternating current motor, rigidly mounted in a suitable shock fixture, shall be subjected to shock tests so as to meet the requirements specified in 3.4.2.1 and thereafter shall meet all the performance requirements and product characteristics of this specification.

4.5.3 Temperature

4.5.3.1 Temperature, operating condition. - The alternating current motor shall be subjected to temperature tests so as to meet the requirements specified in 3.4.3.1 and thereafter shall meet all the performance requirements and product characteristics of this specification.

4.5.3.2 Temperature, non-operating condition. - The alternating current motor shall be subjected to temperature tests so as to meet the requirements specified in 3.4.3.2 and thereafter shall meet all the performance requirements and product characteristics of this specification.

4.5.4 Humidity. - The alternating current motor shall be subjected to humidity tests so as to meet the requirements specified in 3.4.4, and thereafter shall meet all the performance requirements and product characteristics of this specification.

4.5.5 Tropical environment. - The alternating current motor shall be exposed to fungus tests so as to meet the requirements specified in 3.4.5, and thereafter shall meet all the performance requirements and product characteristics of this specification.

Source: https://assist.dla.mil -- Downloaded: 202610-19T12:11Z
Check the source to verify that this is the current version before use.

4.5.6 Pinion hardness. - The hardness of the pinion shall be measured by making an indentation on the flat end surface of the pinion of alternating current motor type II, near its center, using a suitable hardness testing machine, and measuring the size of the indentation to determine compliance with the requirements of 3.4.6.

Note 2. - For the tests of 4.5.7 and 4.5.8, the conditions listed in note 1 shall obtain.

4.5.7 Temperature rise at rated torque output. - With the alternating current motor connected in accordance with note 1, and the dynamometer of 4.3.4.4 or 4.3.4.5, as applicable, used to apply rated torque output as specified on the applicable BUWEPS drawing through a heat-insulating coupling, operation shall be continued until the change of winding resistance over a five-minute period is less than 0.4 percent of the nominal resistance at room temperature. When this condition is reached, the temperature rise shall be computed using the formula of 3.2.6 to determine compliance with the requirements of 3.4.7.

4.5.8 Operating life. - With the alternating current motor connected in accordance with note 1, the dynamometer of 4.3.4.4 or 4.3.4.5, as applicable, used to apply rated torque output as specified on the applicable BUWEPS drawing (through a single gear mesh - a 120 pitch gear for this purpose must be attached to the shaft of the alternating current motor types I, III, and IV), and mounting such that the shaft is horizontal, the alternating current motor shall be operated for 1000 hours, reversing the direction of rotation every 24 hours by interchanging the red and green leads.

4.6 Wavier of tests. - Tests specified in 4.5.1.1 and 4.5.2.1 may be waived by the procuring agency for level C packs only, provided the contractor guarantees safe delivery to the using activity.

4.7 Functional tests. - At the conclusion of the tests specified in 4.5.1.1 and 4.5.2.1, functional and other tests, as applicable, shall be conducted on the alternating current motor to determine freedom from operational malfunction and compliance with all the requirements of section 3.

4.8 Failure of the alternating current motor to meet any of the requirements and tests of this specification shall be considered cause for rejection.

5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging.

Source: https://assist.dla.mil -- Downloaded: 202610-19T12:11Z
Check the source to verify that this is the current version before use.

5.1.1 Level A. - In addition to the following, Level A packaging shall be in accordance with Specification MIL-P-16298.

5.1.1.1 Cleaning, drying and preservative application. - Not applicable.

5.1.1.2 Unit packaging. - Unit packaging of the motor shall be in accordance with Method IIe of Specification MIL-P-116. The unit package shall contain one motor packaged in a fiber box in accordance with Specification PPP-B-636, Class 2, with Kraft paper overwrap in accordance with Specification UU-P-268.

5.1.1.3 Intermediate package. - Not applicable.

5.1.1.4 Cushioning. - The unit package and pack shall incorporate sufficient cushioning material, bracing, or other adequate shock absorbing devices, to ensure that the motor will meet all the requirements of section 3 after being tested in accordance with 4.5.1.1 and 4.5.2.1.

At the time of packaging or packing, the moisture content of the cushioning material shall be no more than 5 percent. The pH range of the material shall be between 6.0 and 8.0.

5.1.2 Level B. - Not applicable.

5.1.3 Level C.

5.1.3.1 Cleaning, drying and preservative application. - Not applicable.

5.1.3.2 Unit packaging. - Unit packaging of the motor shall be in accordance with Method III of Specification MIL-P-116. The unit package shall contain one motor.

5.1.3.3 Intermediate package. - Not applicable.

5.2 Packing.

5.2.1 Level A. - In addition to the following, Level A packing shall be in accordance with Specification MIL-P-16293.

5.2.1.1 Exterior containers. - Motors packaged as described in 5.1.1.2 shall be packed in a wood box in accordance with Specification PPP-B-601, overseas type, or PPP-B-621, Class 2 (gross weight not to exceed 150 lbs) or in fiber boxes in accordance with Specification PPP-B-636, Class 2 (gross weight not to exceed 70 lbs).

Source: https://assist.dla.mil -- Downloaded: 20261O-19T12:11Z
Check the source to verify that this is the current version before use.

5.2.1.2 Case liners. - Wood exterior containers shall be provided with case liners in accordance with Specification MIL-L-10547.

5.2.2 Level B. - In addition to the following, level B packing shall be in accordance with Specification MIL-P-16298.

5.2.2.1 Exterior containers. - Motors packaged as described in 5.1.1.2 shall be packed in a wood box in accordance with Specification PPP-B-601, domestic type, or PPP-B-621, Class 1 (gross weight not to exceed 150 lbs) or in fiber boxes in accordance with Specification PPP-B-636, Class 1 (gross weight not to exceed 70 lbs).

5.2.2.2 Case liners. - Wood exterior containers shall be provided with case liners in accordance with Specification MIL-L-10547.

5.2.3 Level C. - Motors packaged in accordance with 5.1.3.2 shall be packed to afford protection against damage during shipment from the supply source to the first receiving activity for immediate use. Containers shall comply with Consolidated Freight Classification Rules or other common carrier regulations applicable to the mode of transportation.

5.3 Marking.

5.3.1 Special markings. - None, unless otherwise specified.

5.3.2 Normal markings. - In addition to the markings required by contract or order, unit packages and shipping containers shall be marked in accordance with the requirements of MIL-STD-129, including serial numbers.

6. NOTES

6.1 Intended use. - The alternating current motor is intended for use in the Angle Solvers Mark 18 Mod 2 and Mod 3, the Fire Control System Mark 112 Mod 1, the Sonar Receiver Sets AN/BQG-1, -2, -3, -4, or other suitable application.

6.2 Ordering data. - Procurement documents should specify the specific title, number, and date of this specification and exceptions to this specification; applicable drawings and other documents; selection of applicable levels of packaging and packing; number of unit containers per pack; and guarantee clause (see 6.5).

6.3 Criteria for use of the proper level of preservation, packaging, and packing shall be as follows:

Source: https://assist.dla.mil -- Downloaded: 202640-19T12:11Z
Check the source to verify that this is the currentversion before use.

For level A. - This level shall be used for those items which are to be shipped to indeterminate destinations or stored under indeterminate conditions for redistribution anywhere.

For level B. - This level shall be used only when it is definitely known that the item will be held in covered storage in overseas locations for six months or less or in domestic locations for an indefinite period.

For level C. - This level shall be used only when it is definitely known that the packaged item is to be shipped to domestic installations for immediate use at the first receiving activity.


6.4 The attention of the contracting officer is invited to the Quality Assurance Provisions and options in Specification MIL-P-116 and to para. 4.6.

6.5 Guarantee. - The contract or order shall include a requirement for a guarantee stating that any alternating current motor which fails to meet the requirements of this specification within one year after delivery because of a defect in material or workmanship or because of the vendor's failure to comply with the requirements of the applicable drawings and specifications shall be replaced by the vendor at no cost to the Government.

6.6 The contract or order shall include a sufficient number of extra items to cover production and pre-production testing samples.

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented inventions that may in any way be related thereto.

Source: https://assist.dla.mil -- Downloaded: 202640-19T12:11Z
Check the source to verify that this is the currentversion before use.

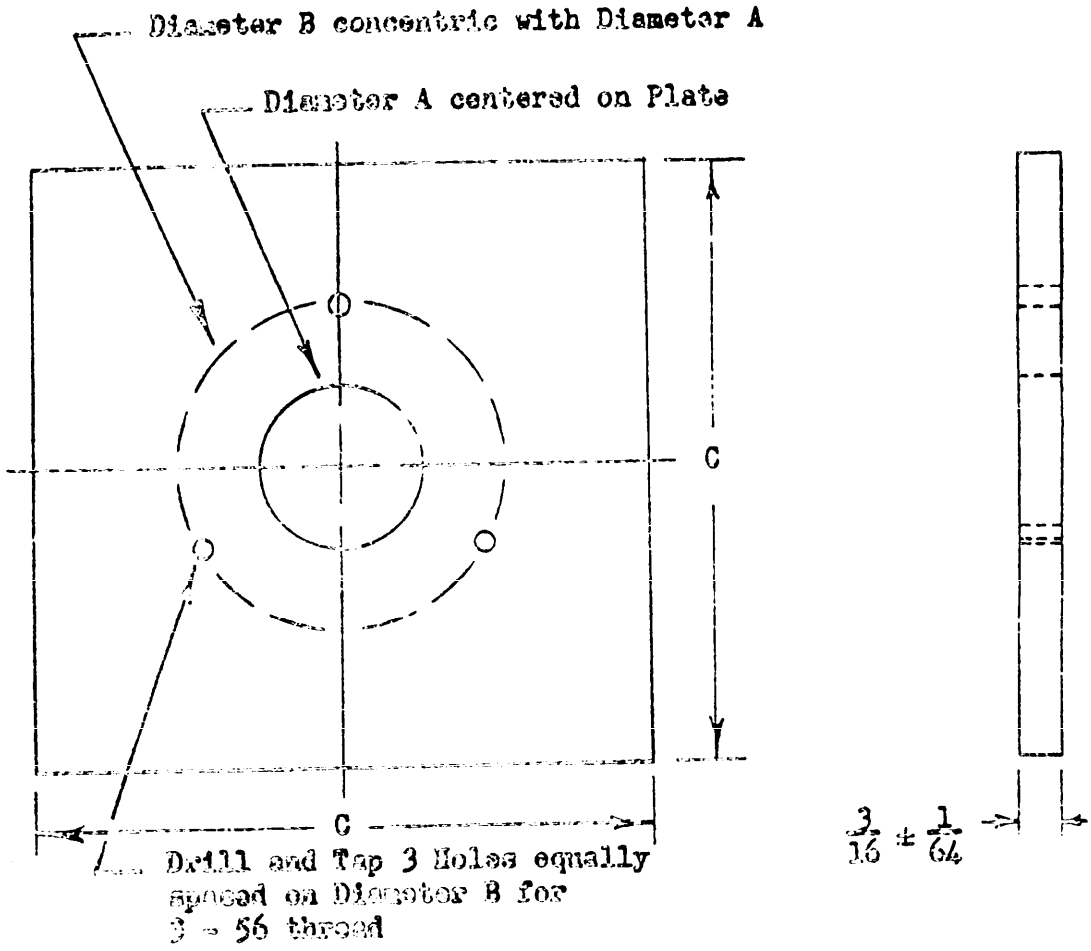

Material: Aluminum, flat sheet, temper T3, Specification QQ-A-355
Finish: Black anodized

Alternating Current Motor Type	A +.001 -.000 Inch	B +.002 -.002 Inches	C +.050 -.050 Inches
I, III	0.626	1.375	3.20
II	0.501	1.375	3.20
IV	0.876	1.688	4.30

Figure 1. Alternating Current Motor Heat Sinks

Source: https://assist.dla.mil -- Downloaded: 202610-19T12:11Z
Check the source to verify that this is the current version before use.

TABLE I. ALTERNATING CURRENT MOTOR REQUIREMENTS

Quantity	Alternating Current Motor Type			
	I	II	III	IV
Insulation Resistance (Min)	50 Megohms	50 Megohms	50 Megohms	50 Megohms
Input Current at Rated Torque Output (Max)	0.290 A.	0.312 A.	0.312 A.	0.263 A.
Input Power at Rated Torque Output (Max)	7.9 W.	9.24 W.	9.24 W.	10.4 W.
Temperature Rise at Rated Torque Output (Max)	70° C.	70° C.	70° C.	70° C.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:11Z
Check the source to verify that this is the current version before use.

:TIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in g comments and suggestions for improvements. All users of military standardization documents are invited to provide us. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and n block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the . Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an dgement will be mailed to you within 30 days to let you know that your comments were received and are being d.

This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of ion requirements on current contracts. Comments submitted on this form do not constitute or imply authorization any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

MENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

USINESS
FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Commander
Naval Sea Systems Command
Engineering Support Division
ATTN: SEA 981
Department of the Navy
Washington, DC 20360

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:11Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions - Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: ____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 20260119T12:11Z
Check the source to verify that this is the current version before use.