MIL-S-22432/17C
15 October 1974
SUPERSEDING
MIL-S-22432/17B
10 MARCH 1969


MILITARY SPECIFICATION SHEET
SERVOMOTOR, TYPE 11SM4o

This Specification is Mandatory for Use by All Departments and Agencies of the Department of Defense.


THE COMPLETE REQUIREMENTS FOR PROCURING THE SERVOMOTOR DESCRIBED HEREIN SHALL CONSIST OF THIS DOCUMENT AND THE ISSUE IN EFFECT OF SPECIFICATION MIL-S-22432.

SPUR GEAR DATA	
TEETH	13
PITCH	120
OUTSIDE DIAMETER	.1267 +.0000 -.0010
PRESSURE ANGLE	20°
TOOTH FORM	FULL DEPTH INVOLUTE
DESIGN TO MEET AGMA 207.04 (ASA-B-6.7-1956) "20 DEGREE INVOLUTE FINE PITCH SYSTEM" PRECISION GRADE 1 TESTED TO AGMA 236.04 (ASA-B-6.11-1956) INSPECTION OF FINE GEARS.	

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCE ON FRACTIONS ±1/64
DECIMALS ±.005 ANGLES ±5°

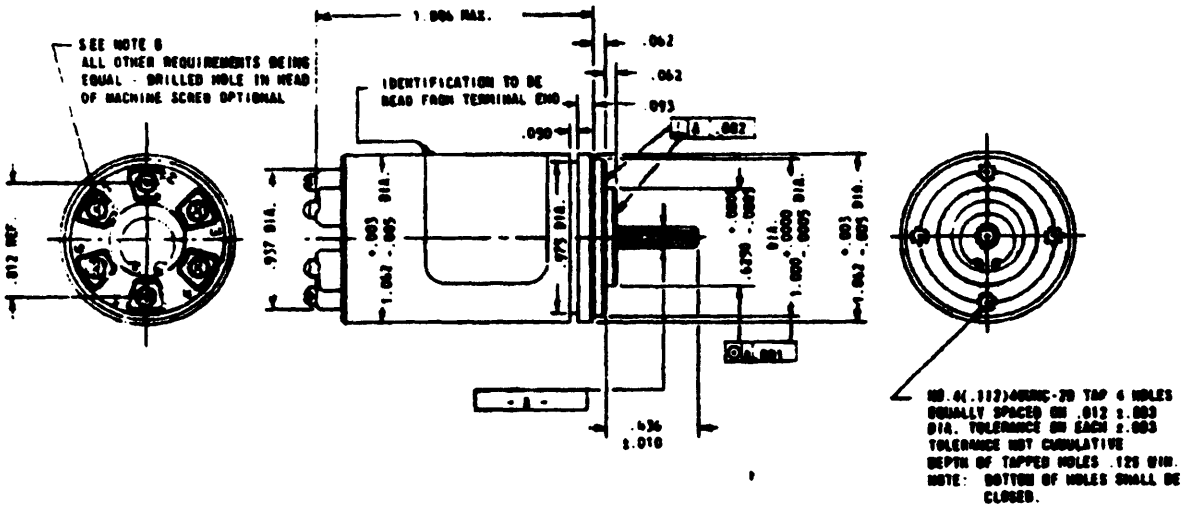

NO.4(.112)-40UNC-2B TAP 4 HOLES EQUALLY SPACED ON .812 ±.003 DIA. TOLERANCE ON EACH ±.003 TOLERANCE NOT CUMULATIVE DEPTH OF TAPPED HOLES .125 MIN. NOTE: BOTTOM OF HOLES SHALL BE CLOSED.

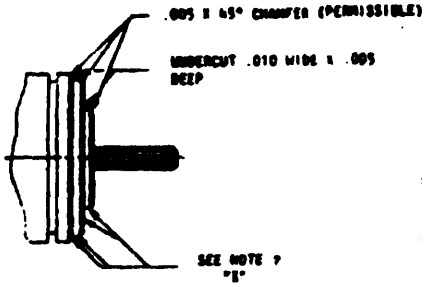

NOTES:

1. PERPENDICULARITY AND CONCENTRICITY SHALL BE MEASURED WITH THE UNIT IN A VERTICAL POSITION SUPPORTED BY THE SHAFT. THEN THE HOUSING SHALL BE ROTATED
2. RUNOUT OF FEATURE 'A' SHALL NOT EXCEED .0014 TIR.
3. END PLAY AND RADIAL PLAY SHALL BE MEASURED DURING THE REVERSAL OF THE FOLLOWING LOADS:
   END PLAY - 1 POUND RADIAL PLAY - 1/2 POUND
4. THE DESIGN OF THIS UNIT SHALL PROVIDE FOR THE TERMINAL BLOCK TO REMAIN FIXED WHEN TERMINAL SCREWS ARE REMOVED
5. THE END CAP DESIGN SHALL BE SUCH THAT THE TERMINAL LUG MAY BE INSTALLED WITH THE BARREL INBOARD OR 180° POSITION OUTBOARD. RECESSES FOR LUGS SHALL BE OF WIDTH AND DEPTH TO PREVENT TURNING OF THE LUGS.
6. THE FOLLOWING LIST OF HARDWARE, MS-35270-202 MACHINE SCREW (8 REQUIRED) MS-35338 134 LOCK WASHER (8 REQUIRED) SHALL BE PACKAGED IN A VENTILATED ENVELOPE MADE OF MATERIAL HAVING A PH VALUE OF 6.0 THAT IS COMPATIBLE WITH THE WEIGHT OF THE CONTENTS. THEN THE PACKAGED HARDWARE SHALL BE PLACED IN THE UNIT SERVOMOTOR PACKAGE.
7. HOUSING SHALL BE STAINLESS STEEL. SURFACES MARKED 'B' SHALL BE BRIGHT METALLIC FINISH (AS PER MIL-C 13924)
8. DIMENSIONS AND TOLERANCES COMPLY WITH ANSI Y14.5.
9. PENDING ISSUANCE OF A QUALIFIED PRODUCTS LIST (QPL) A SAMPLE OF THE SERVOMOTORS TO BE FURNISHED UNDER THIS SPECIFICATION SHALL BE SUBJECTED TO THE PREPRODUCTION TESTS AS SPECIFIED IN SPECIFICATION MIL S-22432

FSC 6105

FIGURE 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:16Z
Check the source to verify that this is the current version before use.

TABLE I (Continued)

Requirements	Value	Unit	Tolerance
Rotor Moment of Inertia	1.1	$gm\text{-}cm^2$	maximum
Radial Play	.0008	inch	maximum
End Play	.0045	inch	maximum
	.0020	inch	minimum
Temperature Rise	75	degrees C	maximum
Noise, Mechanical	not excessive		
Time Constant	.01	seconds	nominal
Reversing Time	.017	seconds	nominal
Theoretical Acceleration at Stall	66000	$radians/second^2$	nominal
Maximum Power Output	1.1	watts	nominal
Weight	4.6	ounces	maximum

Notes:


1. The servomotor identified herein shall conform to all requirements, and shall be subjected to all tests delineated in MIL-S-22432, with the following exceptions:

Salt Atmosphere Resistance, paragraph 3.30
Audible Noise, paragraph 3.31

2. Type 11SM4a servomotors shall be capable of operation in ambient temperatures ranging from -55°C to 125°C.

3. This servomotor was formerly identified as the BUORD Mark 14 Mod 4.

4. Connection diagram:

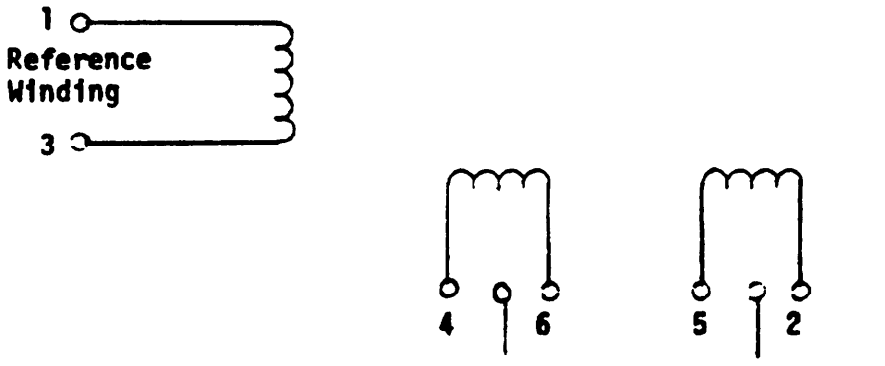

Control Winding Excitation 400 cps

Figure 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:16Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Commanding Officer
Naval Air Engineering Center
Engineering Specifications & Standards
Department (ESSD) Code 93
Lakehurst, NJ 08733

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:16Z
Check the source to verify that this is the current version before use.