MILITARY SPECIFICATION SHEET
SERVOMOTOR, TYPE 11SM4a

This amendment forms a part of military specification MIL-S-22432/17C, dated 22 August 1974, and is approved for use by all departments and agencies of the Department of Defense.

Page 1


Under "Spur Gear Data", delete the following:

"Design to meet AGMA 207.04 (ASAB6.7 1956)" 20 Degree Involute Fine Pitch System" Precision Grade 1 tested to AGMA 236.04 (ASAB6.11 1956) Inspection of Fine Gears".

and substitute:

"Design to AGMA 207.05 ANSI B6.7-1967) "Tooth Proportions for Fine Pitch Involute Spur and Helical Gears": Tested to AGMA 390.03 "AGMA Gear Handbook, Vol. 1, Gear Classification, Materials and Measuring Methods for Unassembled Gears"

Figure 1: Delete the place of the maximum body length designation at the shaft end of the unit and substitute as follows:

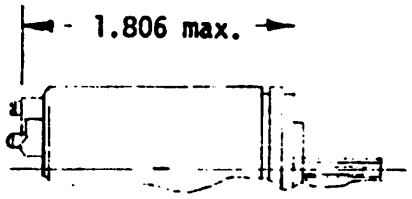

Custodians:

Army - MU
Navy - AS
Air Force - 11

Review Activities:

Army - EL, MI, MU
Navy - SH, AS, OS, EC
Air Force - 11, 82

User Activities:

Army - ME, AV
Navy - OS, MC, CG

Preparing Activity:

Navy - AS

DOD Project Number:

6105-0116

FSC 6105

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:16Z
Check the source to verify that this is the current version before use.