
MIL-C-39024/1B
17 April 1978
SUPERSEDING
MIL-C-39024/1A
20 December 1971

MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, TEST POINT TYPE, PANEL TYPE; SINGLE TEST POINT (THREADED), LOW VOLTAGE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the connectors described herein shall consist of this document and the latest issue of Specification MIL-C-39024.

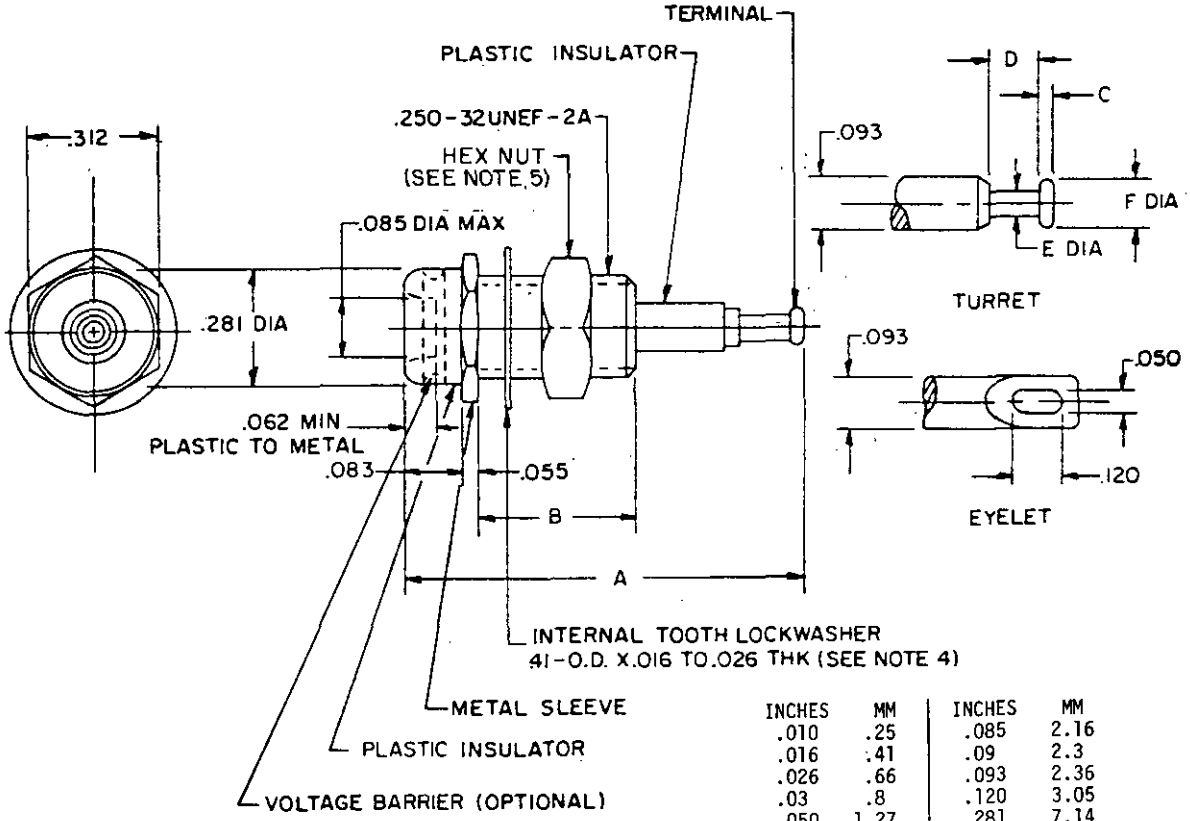

INCHES	MM	INCHES	MM
.010	.25	.085	2.16
.016	.41	.09	2.3
.026	.66	.093	2.36
.03	.8	.120	3.05
.050	1.27	.281	7.14
.055	1.40	.312	7.92
.062	1.57	.34	8.6
.083	2.11	.41	10.4

NOTES:
1. Dimensions are in inches. (See table I for dimensions not shown on figure.)
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerances are ±.010 (.25 mm) for three place decimals and ±.03 (.8 mm) for two place decimals.
4. Parts supplied unassembled.
5. Hex nut .338 (8.59 mm) ±.006 (.15 mm) across flats X .09 (2.3 mm) ±.03 (.8 mm) thick.

FIGURE 1. Configuration and dimensions.

FSC 5935

(B) denotes change.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:23Z
Check the source to verify that this is the current version before use.

TABLE I. Design and identification data.

Dash number	Terminal style	Dimensions (in inches 1/)						Insulation	
		A	B	C	D	E	F	Color	Number per FED-STD-595
-01	Turret	1.000 max (25.40)	0.428 (10.87)	0.030 (0.76)	0.130 (3.30)	0.070 (1.78)	0.100 (2.54)	White	17875
-02								Red	11105
-03								Black	17038
-04								Brown	10075
-05								Green	14110
-06								Orange	12246
-07								Blue	15123
-08								Yellow	13655
-09								Gray	16187
-10								Purple	27144
-11	Turret	.703 / .672 (17.86) / (17.07)	.250 (6.35)	.020 (0.51)	.105 (2.67)	.060 (1.52)	.093 (2.36)	White	17875
-12								Red	11105
-13								Black	17038
-14								Brown	10075
-15								Green	14110
-16								Orange	12246
-17								Blue	15123
-18								Yellow	13655
-19								Gray	16187
-20								Purple	27144
-21	Eyelet	1.000 max (25.40)	.428 (10.87)	---	---	---	---	White	17875
-22								Red	11105
-23								Black	17038
-24								Brown	10075
-25								Green	14110
-26								Orange	12246
-27								Blue	15123
-28								Yellow	13655
-29								Gray	16187
-30								Purple	27144
-31	Eyelet	.750 / .719 (19.05) / (18.26)	.250 (6.35)	---	---	---	---	White	17875
-32								Red	11105
-33								Black	17038
-34								Brown	10075
-35								Green	14110
-36								Orange	12246
-37								Blue	15123
-38								Yellow	13655
-39								Gray	16187
-40								Purple	27144

1/ Metric equivalents are shown in parentheses.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:23Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:
Dimensions and configuration: See figure 1 and table I.
Terminals: Shall be capable of being wired with two type E-20 wires per MIL-W-16878/4. Configuration shall be as shown in figure 1 (see table I).
(B) Test probe: 0.080 ±0.001 inch in diameter and 7/16-inch (min) length.
Contact current rating: 5 amperes (max).

Contact resistance: A test probe in accordance with MIL-C-39024 shall be fully inserted in the connector. With a current of 5 amperes, potential drop shall be measured between the connector terminal and the extreme end of the solder cup on the test probe. Measured values shall be 20 millivolts (max).

Dielectric withstanding voltage (at sea level):
Test voltage shall be as follows:

Dash numbers	Volts, rms (60 Hz)
-01 thru -10	3,000
-11 thru -20	2,500
-21 thru -30	3,000
-31 thru -40	2,500

Insertion and withdrawal forces:
Insertion force: 4.5 pounds (max).
Withdrawal force: 0.4 pound (min).

Identification marking:
Part number: M39024/1-(dash number from table I).

OPERATING NOTES:

1. Operating voltage is as follows:

Dash numbers	At sea level	At 50,000 feet
-01 thru -10 and -21 thru -30	2,000 volts rms, 60 Hz	525 volts rms, 60 Hz
-11 thru -20 and -31 thru -40	1,800 volts rms, 60 Hz	500 volts rms, 60 Hz

2. Maximum thickness of panel on which these connectors may be used is as follows:

Dash numbers	Max panel thickness
-01 thru -10	0.234 inch
-11 thru -20	0.094 inch
-21 thru -30	0.234 inch
-31 thru -40	0.094 inch

Custodians:
Army - EL
Navy - EC
Air Force - 85

Review activities:
Army - ME
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - MI, AR, WC
Navy - AS, YD, MC, CG, OS, SH
Air Force - 19

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5935-3066-1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:23Z
Check the source to verify that this is the current version before use.