| INCH-POUND |


MIL-C-39024/1C
14 August 1991
SUPERSEDING
MIL-C-39024/1B
17 April 1978

MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, TEST POINT TYPE, PANEL TYPE; SINGLE TEST POINT (THREADED), LOW VOLTAGE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

© The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-39024.

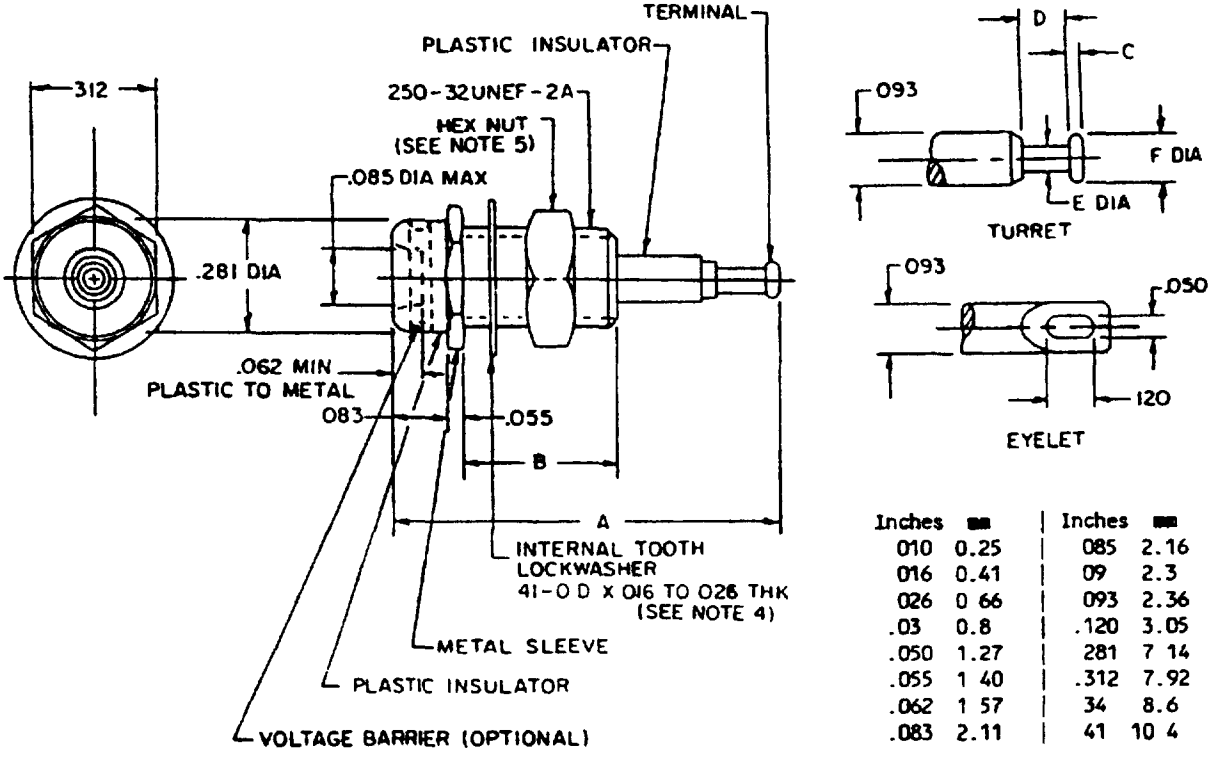

Inches	mm	Inches	mm
.010	0.25	.085	2.16
.016	0.41	.09	2.3
.026	0 66	.093	2.36
.03	0.8	.120	3.05
.050	1.27	.281	7 14
.055	1 40	.312	7.92
.062	1 57	34	8.6
.083	2.11	41	10 4

NOTES:
1. Dimensions are in inches (See table I for dimensions not shown on figure)
2. Metric equivalents are given for general information only
3. Unless otherwise specified, tolerances are ± 010 (0.25 mm) for three place decimals and ± 03 (0.8 mm) for two place decimals
4. Parts supplied unassembled
5. Hex nut .338 (8 59 mm) ± 006 (0 15 mm) across flats x .09 (2 3 mm) ± 03 (0 8 mm) thick

FIGURE 1 Configuration and dimensions

© denotes changes

DISTRIBUTION STATEMENT A Approved for public release, distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:23Z
Check the source to verify that this is the current version before use.

TABLE I Design and identification data

Dash number	Terminal style	Dimensions 1/						Insulation	
		A	B	C	D	E	F	Color	Number in accordance with FED-STD-595
-01	Turret	1.000 max (25.40)	.428 (10.87)	.030 (0.76)	.130 (3.30)	.070 (1.78)	.100 (2.54	White	17875
-02	"	"	"	"	"	"	"	Red	11105
-03	"	"	"	"	"	"	"	Black	17038
-04	"	"	"	"	"	"	"	Brown	10075
-05	"	"	"	"	"	"	"	Green	14110
-06	"	"	"	"	"	"	"	Orange	12246
-07	"	"	"	"	"	"	"	Blue	15123
-08	"	"	"	"	"	"	"	Yellow	13655
-09	"	"	"	"	"	"	"	Gray	16187
-10	"	"	"	"	"	"	"	Purple	27144
-11	Turret	.703 .672 (17.86) (17.07)	.250 (6.35)	.020 (0.51)	.105 (2.67)	.060 (1.52)	.093 (2.36)	White	17875
-12	"	"	"	"	"	"	"	Red	11105
-13	"	"	"	"	"	"	"	Black	17038
-14	"	"	"	"	"	"	"	Brown	10075
-15	"	"	"	"	"	"	"	Green	14110
-16	"	"	"	"	"	"	"	Orange	12246
-17	"	"	"	"	"	"	"	Blue	15123
-18	"	"	"	"	"	"	"	Yellow	13655
-19	"	"	"	"	"	"	"	Gray	16187
-20	"	"	"	"	"	"	"	Purple	27144
-21	Eyelet	1.000 max (25.40)	.428 (10.87)	---	---	---	---	White	17875
-22	"	"	"	"	"	"	"	Red	11105
-23	"	"	"	"	"	"	"	Black	17038
-24	"	"	"	"	"	"	"	Brown	10075
-25	"	"	"	"	"	"	"	Green	14110
-26	"	"	"	"	"	"	"	Orange	12246
-27	"	"	"	"	"	"	"	Blue	15123
-28	"	"	"	"	"	"	"	Yellow	13655
-29	"	"	"	"	"	"	"	Gray	16187
-30	"	"	"	"	"	"	"	Purple	27144

See footnote at end of table

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:23Z
Check the source to verify that this is the current version before use.

TABLE I Design and identification data - Continued

Dash number	Terminal style	Dimensions 1/						Insulation	
		A	B	C	D	E	F	Color	Number in accordance with FED-STD-595
-31	Eyelet	.750 719 (19.05) (18.26)	.250 (6.35)	---	---	---	---	White	17875
-32	"	"	"	"	"	"	"	Red	11105
-33	"	"	"	"	"	"	"	Black	17038
-34	"	"	"	"	"	"	"	Brown	10075
-35	"	"	"	"	"	"	"	Green	14110
-36	"	"	"	"	"	"	"	Orange	12246
-37	"	"	"	"	"	"	"	Blue	15123
-38	"	"	"	"	"	"	"	Yellow	13655
-39	"	"	"	"	"	"	"	Gray	16187
-40	"	"	"	"	"	"	"	Purple	27144

1/ Metric equivalents are in parentheses.

REQUIREMENTS.

Design and construction:

Dimensions and configuration See figure 1 and table I.

Terminals: Shall be capable of being wired with two type E-20 wires in accordance with MIL-W-16878/4. Configuration shall be specified on figure 1 and table I.

Test probe: .080 ±.001 inch in diameter and 438 inch (min) length.

Contact current rating 5 amperes (max)

Contact resistance: A test probe in accordance with MIL-C-39024 shall be fully inserted in the connector. With a current of 5 amperes, potential drop shall be measured between the connector terminal and the extreme end of the solder cup on the test probe Measured values shall be 20 millivolts (max).

Dielectric withstanding voltage (at sea level):

Test voltage shall be as follows:

Dash numbers	Volts, rms (60 Hz)
-01 thru -10	3,000
-11 thru -20	2,500
-21 thru -30	3,000
-31 thru -40	2,500

Insertion and withdrawal forces

Insertion force: 4 5 pounds (max)

Withdrawal force 0 4 pound (min)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:23Z
Check the source to verify that this is the current version before use.

Identification marking.

© Part or Identifying Number (PIN) M39024/1-(dash number from table I)

OPERATING NOTES:

1. Operating voltage is as follows

Dash numbers	At sea level	At 50,000 feet
-01 thru -10 and -21 thru -30	2,000 volts rms, 60 Hz	525 volts rms, 60 Hz
-11 thru -20 and -31 thru -40	1,800 volts rms, 60 Hz	500 volts rms, 60 Hz

2 Maximum thickness of panel on which these connectors may be used is as follows

Dash numbers	Max panel thickness
-01 thru -10	234 inch
-11 thru -20	094 inch
-21 thru -30	.234 inch
-31 thru -40	094 inch

© QUALIFICATION. Not applicable

Quality conformance inspection Groups A and B tests of MIL-C-39024 shall be applicable.

CONCLUDING MATERIAL

Custodians.
Army - CR
Navy - EC
Air Force - 85

Review activities
Army - ME
Air Force - 11, 17, 99
DLA - ES

User activities
Army - AR, MI
Navy - AS, CG, MC, OS, SH, YD
Air Force - 14, 19

Preparing activity
Navy - EC

Agent
DLA - ES

Project 5935-3809-01)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:23Z
Check the source to verify that this is the current version before use.