
INCH-POUND
MIL-C-39024/2C
14 August 1991
SUPERSEDING
MIL-C-39024/2B
17 April 1978


MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, TEST POINT TYPE, PANEL TYPE, SINGLE TEST POINT (THREADED), HIGH VOLTAGE


This specification is approved for use by all Departments and Agencies of the Department of Defense.

Ⓒ The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-39024

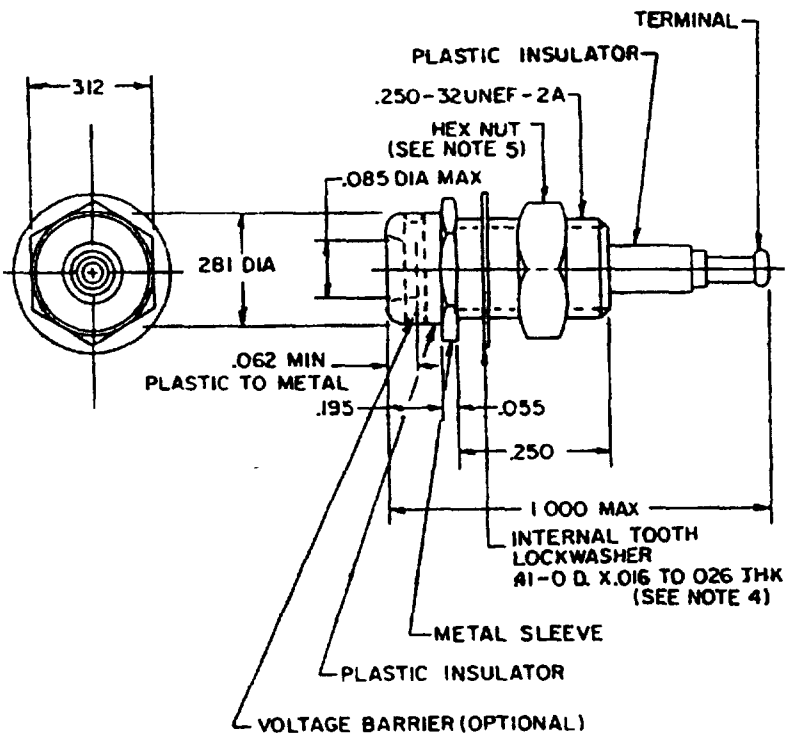



TURRET



EYELET

Inches	mm	Inches	mm
.010	0.25	.100	2.54
.016	0.41	.120	3.05
.026	0.66	.130	3.30
.030	0.76	.195	4.95
.050	1.27	.250	6.35
.055	1.40	.281	7.14
.062	1.57	.312	7.92
.070	1.78	.34	8.6
.085	2.16	.41	10.4
.09	2.3	1.000	25.40

NOTES.
1. Dimensions are in inches
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±.010 (0.25 mm) for three place decimals and ± .03 (0.8 mm) for two place decimals.
4. Parts supplied unassembled
5. Hex nut .338 (8.59 mm) ± .006 (0.15 mm) across flats x .09 (2.3 mm) ±.03 (0.8 mm) thick

FIGURE 1 Configuration and dimensions

Ⓒ denotes changes

DISTRIBUTION STATEMENT A Approved for public release, distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:23Z
Check the source to verify that this is the current version before use.

TABLE I Design and identification data

Dash number	Terminal style	Insulation	
		Color	Number in accordance with FED-STD-595
-01	Turret	White	17875
-02	"	Red	11105
-03	"	Black	17038
-04	"	Brown	10075
-05	"	Green	14110
-06	"	Orange	12246
-07	"	Blue	15123
-08	"	Yellow	13655
-09	"	Gray	16187
-10	"	Purple	27144
-11	Eyelet	White	17875
-12	"	Red	11105
-13	"	Black	17038
-14	"	Brown	10075
-15	"	Green	14110
-16	"	Orange	12246
-17	"	Blue	15123
-18	"	Yellow	13655
-19	"	Gray	16187
-20	"	Purple	27144

REQUIREMENTS:

Design and construction.

Dimensions and configuration See figure 1.

Terminals: Shall be capable of being wired with two type E-20 wires in accordance with MIL-W-16878/4 Configuration shall be specified on figure 1 and table I

Operating temperature: -65°C to +200°C

Test probe: 080 ± 001 inch in diameter and 438 inch (min) length

Contact current rating. 5 amperes (max)

Contact resistance: A test probe in accordance with MIL-C-39024 shall be fully inserted in the connector. With a current of 5 amperes, potential drop shall be measured between the connector terminal and the extreme end of the solder cup on the test probe. Measured values shall be 20 millivolts (max).

Dielectric withstanding voltage (at sea level):

Measurements shall be made between current carrying parts and ground as specified in MIL-C-39024.

Test voltage 5,000 volts rms, 60 hertz.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:23Z
Check the source to verify that this is the current version before use.

Insertion and withdrawal forces

Insertion force: 4 5 pounds (max)

Withdrawal force: 0 4 pound (min).

Thermal shock. Shall be in accordance with method 107 of MIL-STD-202, condition C

Identification marking:

© Part or Identifying Number (PIN). M39024/2-(dash number from table I)

OPERATING NOTES:

1. Operating voltage, when applied between ground and current carrying parts, is: 3,700 volts rms, 60 hertz at sea level; and 1,000 volts rms, 60 hertz at 50,000 feet.

2. Maximum thickness of panel on which these connectors may be used is .094 inch

© QUALIFICATION: Not applicable

Quality conformance inspection Quality conformance inspection: Groups A and B tests of MIL-C-39024 shall be applicable

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Army - ME
Air Force - 11, 17, 99
DLA - ES

User activities.
Army - AR, MI
Navy - AS, CG, MC, OS, SH, YD
Air Force - 14, 19

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5935-3809-02)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:23Z
Check the source to verify that this is the current version before use.