| INCH-POUND |


MIL-C-39024/3B
14 August 1991
SUPERSEDING
MIL-C-39024/3A
17 April 1978

MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, TEST POINT TYPE, PRINTED WIRING, SINGLE TEST POINT (RIGHT ANGLE, 2-LEG MOUNTING), LOW VOLTAGE

This specification is approved for use by all Departments and Agencies of the Department of Defense

(B) The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation MIL-C-39024.

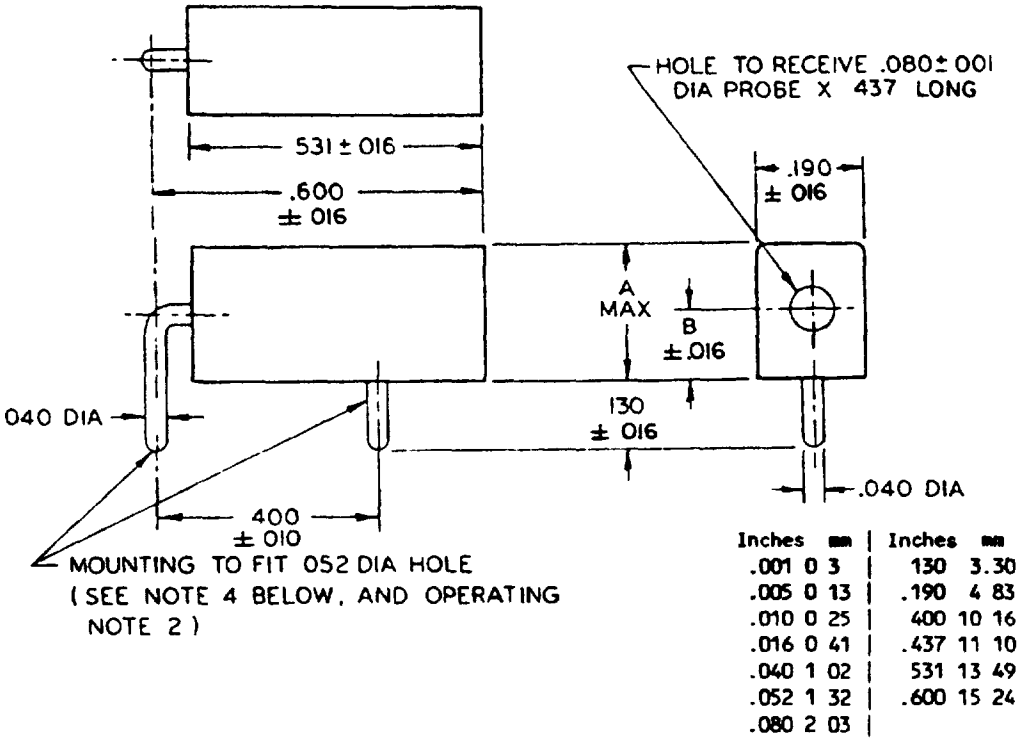

Inches	mm	Inches	mm
.001	0 3	130	3.30
.005	0 13	.190	4 83
.010	0 25	400	10 16
.016	0 41	.437	11 10
.040	1 02	531	13 49
.052	1 32	.600	15 24
.080	2 03		

NOTES:
1. Dimensions are in inches
2. Metric equivalents are given for general information only
3. Unless otherwise specified, tolerance is ±.005 (0 13 mm)
4. Terminal contour is optional provided that mounting hole and mounting center requirements are met

FIGURE 1 Configuration and dimensions

(B) denotes changes

DISTRIBUTION STATEMENT A Approved for public release; distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:23Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions and color code

Dash number	Dimensions 1/		Color	Number in accordance with FED-STD-595
	A (max)	B		
-01	230 (5 84)	130 (3.30) ±.015 (0.38)	White	17875
-02	"	"	Red	11105
-03	"	"	Black	17038
-04	"	"	Brown	10075
-05	"	"	Green	14110
-06	"	"	Orange	12246
-07	"	"	Blue	15123
-08	"	"	Yellow	13655
-09	"	"	Gray	16187
-10	"	"	Purple	27144
-11	467 (11.86)	.375 (9.53)	White	17875
-12	"	"	Red	11105
-13	"	"	Black	17038
-14	"	"	Brown	10075
-15	"	"	Green	14110
-16	"	"	Orange	12246
-17	"	"	Blue	15123
-18	"	"	Yellow	13655
-19	"	"	Gray	16187
-20	"	"	Purple	27144

1/ Metric equivalents are in parentheses

REQUIREMENTS.

Design and construction

Dimensions and configuration. See figure 1 and table I

Test probe tip - Connector jack shall accept a .080 ±.001 inch diameter and .438 inch (min) length, test probe tip

Insulation resistance. For test circuit, see figure 2 in MIL-C-39024

Dielectric withstanding voltage (at sea level) A test voltage of 2,500 volts rms, 60 hertz shall be applied. (For test circuit, see figure 2 in MIL-C-39024)

Insertion and withdrawal forces

Insertion force 4 5 pounds (max)

Withdrawal force 0.5 pound (min).

Identification marking.

(B) Part or Identifying Number (PIN) M39024/3-(dash number from table I)

OPERATING NOTES·

1 Operating voltage at sea level is 1,800 volts rms, 60 hertz, and at 50,000 feet is 500 volts rms, 60 hertz

2 Maximum thickness of printed wiring board is .125 inch.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:23Z
Check the source to verify that this is the current version before use.

(B) QUALIFICATION Not applicable

Quality conformance inspection Groups A and B tests of MIL-C-39024 shall be applicable

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities
Army - ME
Navy - SH
Air Force - 11, 17, 99
DLA - ES

User activities.
Army - AR, MI
Navy - AS, CG, MC, OS, YD
Air Force - 14, 19

Preparing activity.
Navy - EC

Agent
DLA - ES

(Project 5935-3809-03)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:23Z
Check the source to verify that this is the current version before use.