INCH-POUND
MIL-PRF-39023/4B
1 February 1999
SUPERSEDING
MIL-R-39023/4A
3 June 1974

PERFORMANCE SPECIFICATION

RESISTORS, VARIABLE, NONWIRE-WOUND, PRECISION, STYLE RQ200

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for style RQ200, variable, nonwire-wound, precision resistors.

1.2 Classification.

1.2.1 Part or Identifying Number (PIN). The PIN will be in the following form:

Single-section (cup) resistors

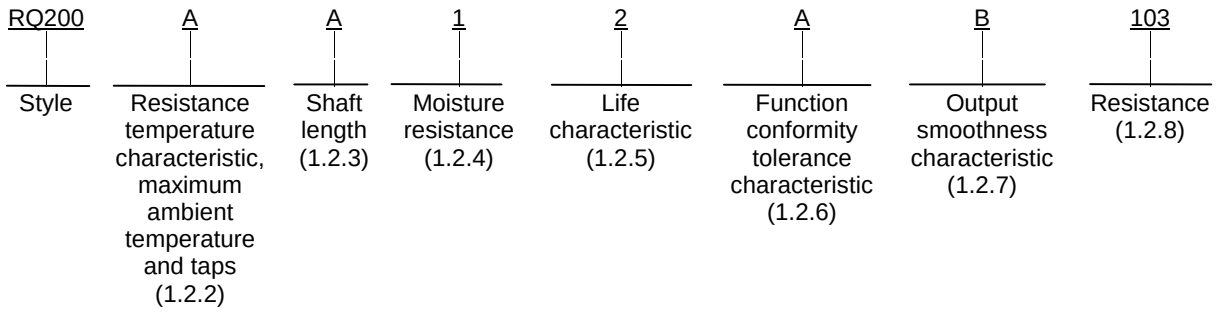

1.2.2 Resistance temperature characteristic, maximum ambient temperature and taps. The resistance temperature characteristic, maximum ambient temperature and taps applicable to this specification are symbols A and B.

1.2.3 Shaft length. The shaft length applicable to this specification are symbols A to F, inclusive.

1.2.4 Moisture resistance. The moisture resistance applicable to this specification are symbols 1 and 2.

1.2.5 Life Characteristic. The life characteristics applicable to this specification are 1 to 4, inclusive.

1.2.6 Function conformity tolerance characteristic. The function conformity tolerance characteristic applicable to this specification are symbols A to F, inclusive.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Defense Supply Center, Columbus, ATTN: DSCC/VAM, 3990 East Broad Street, Columbus, OH 43213-1199 by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 5905
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:19Z
Check the source to verify that this is the current version before use.

1.2.7 Output smoothness characteristic. The output smoothness characteristic applicable to this specification are symbols A to E, inclusive.

1.2.8 Resistance. The nominal total resistance values and maximum end voltage applicable to this specification will be in accordance with table I.

TABLE I. Nominal total resistance values and maximum end voltage.

Nominal total resistance values	Maximum end voltage (percent of total applied voltage)
Ohms	Percent
100	3.0
500	2.0
1,000	1.4
2,000	1.2
5,000	1.1
10,000	1.1
20,000	1.1
50,000	1.1
0.10 Megohm	1.1
0.20 Megohm	1.1
0.50 Megohm	1.1
1.00 Megohm	1.1

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3 and 4 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements documents cited in sections 3 and 4 of this specification, whether or not they are listed.

2.2 Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DoDISS) and supplement thereto, cited in the solicitation (SEE 6.2).

SPECIFICATION

DEPARTMENT OF DEFENSE

MIL-PRF-39023 - Resistors, Variable, Nonwire-Wound, Precision, General Specification for.

(Unless otherwise indicated, copies of the above specifications, standards, and handbooks are available from the Defense Automated Printing Service, Building 4D (DPM-DODSSP), 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:19Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 General. The requirements for acquiring the product described herein shall consist of this document and MIL-PRF-39023.

3.2 Interface and physical dimensions. The resistors shall meet the interface and physical dimension specified in figure 1.

3.3 Minimum total resistance. The minimum total resistance value shall be 100 ohms.

3.4 Maximum total resistance. The maximum total resistance value shall be 1.0 megohm.

3.5 Mechanical travel. The mechanical travel shall be 360 degrees continuous.

3.6 Theoretical electrical travel. The theoretical electrical travel shall be 350 degrees.

3.7 Ganged cups. There shall be no more than 3 cups ganged.

3.8 Phasing. The phasing shall be for simultaneous conformity.

3.9 Weight. The maximum weight shall be 5.0 ounces and each additional cup shall be 2.0 ounces.

3.10 Function conformity. The type of conformity shall be independent linearity.

4. VERIFICATION

4.1 Sampling for delivery shall be in accordance with MIL-PRF-39023.

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When actual packaging of materiel is to be performed by DoD personnel, these personnel need to contact the responsible packaging activity to ascertain requisite packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activity within the Military Department or Defense Agency, or within the Military Department's System Command. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

(This section contains information of general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The intended use specified in MIL-PRF-39023 will be applicable to this specification.

6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number, and date of this specification, and the complete PIN (see 1.2).

b. Issue of DoDISS to be cited in the solicitation, and if required, the specific issue of the individual documents referenced (see 2.1).

c. Packaging requirements (see 5.1).

6.3 PIN. This specification requires a PIN that describes technology and appropriate references to associated documents (see 1.2 and 3.1).

6.4 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the change.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:19Z
Check the source to verify that this is the current version before use.

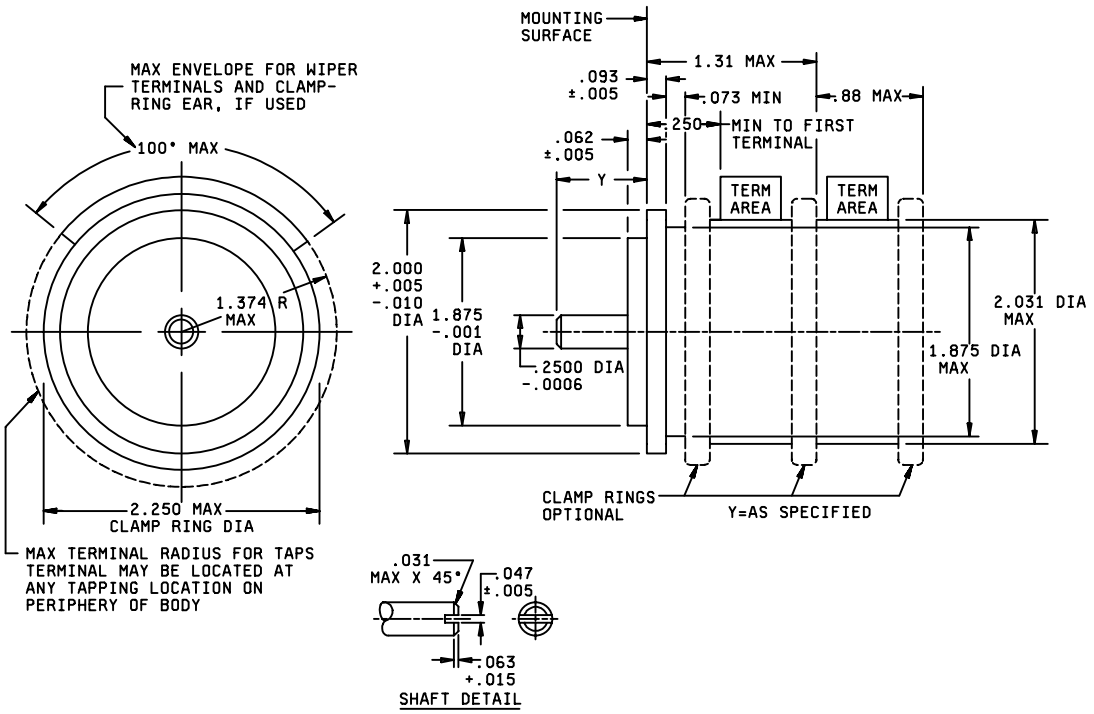

Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm
.0006	0.02	.015	0.38	.063	1.60	.88	22.35	2.000	50.80
.001	0.03	.031	0.79	.073	1.85	1.31	33.27	2.031	51.59
.005	0.13	.047	1.19	.093	2.36	1.375	34.93	2.250	57.15
.010	0.25	.062	1.57	.250	6.35	1.875	47.63		

NOTE: Dimensions are in inches. Metric equivalents (to the nearest 0.01 mm) are given for general information only and are based on 1 inch = 25.4 mm.

Style	Turns	Maximum continuous working voltage (volts)	Power rating (watts) 1/	Maximum starting and running torque (ounce-inch)			
				Single cup		Per each additional cup	
				Starting	Running	Starting	Running
RQ200	single	250	2.0	1.5	1.0	1.5	1.0

1/ When 2 single units are ganged, the first cup shall be rated at 75 percent of single unit wattage rating and second cup shall be rated at 60 percent of rated wattage. When 3 single units are ganged, the first unit shall be rated at 75 percent, the second at 50 percent, and the third at 60 percent of the rated wattage of single units.

Figure 1. Style RQ200

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:19Z
Check the source to verify that this is the current version before use.

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities
Army - AR, AT, AV, CR4, MI
Navy - AS, CG, MC, OS
Air Force - 17, 19, 99

Preparing activity:
DLA - CC

(Project 5905-1506-04)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:19Z
Check the source to verify that this is the current version before use.