NOTE The document identifier and heading has been changed on this page to reflect that this is a performance specification There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.

INCH-POUND


MIL-PRF-39012/36G
26 September 1994
SUPERSEDING
MIL-C-39012/36F
14 December 1987

PERFORMANCE SPECIFICATION SHEET

CONNECTORS, PLUG, ELECTRICAL, COAXIAL, RADIO FREQUENCY
(SERIES SC (CABLED), SOCKET CONTACT, CLASS 2)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-PRF-39012.

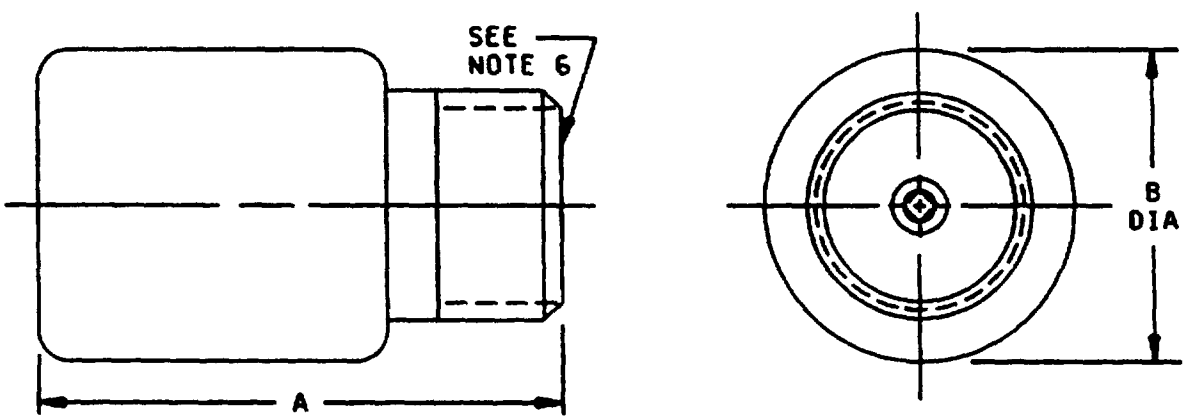


NOTES:
1. For dimensions A and B, see tables I and III.
2. Dimension B is the largest overall diameter of the connector.
3. Wrench flats to accommodate standard wrench in accordance with FED-STD-H28, appendix 10.
4. Dimension A defines the maximum length of the connector when assembled to the appropriate cable.
5. All undimensioned pictorial configurations are for reference purposes only.
6. Series SC, socket contact interface, in accordance with MIL-STD-348, 309.2.

FIGURE 1 General configuration

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:55Z
Check the source to verify that this is the current version before use.

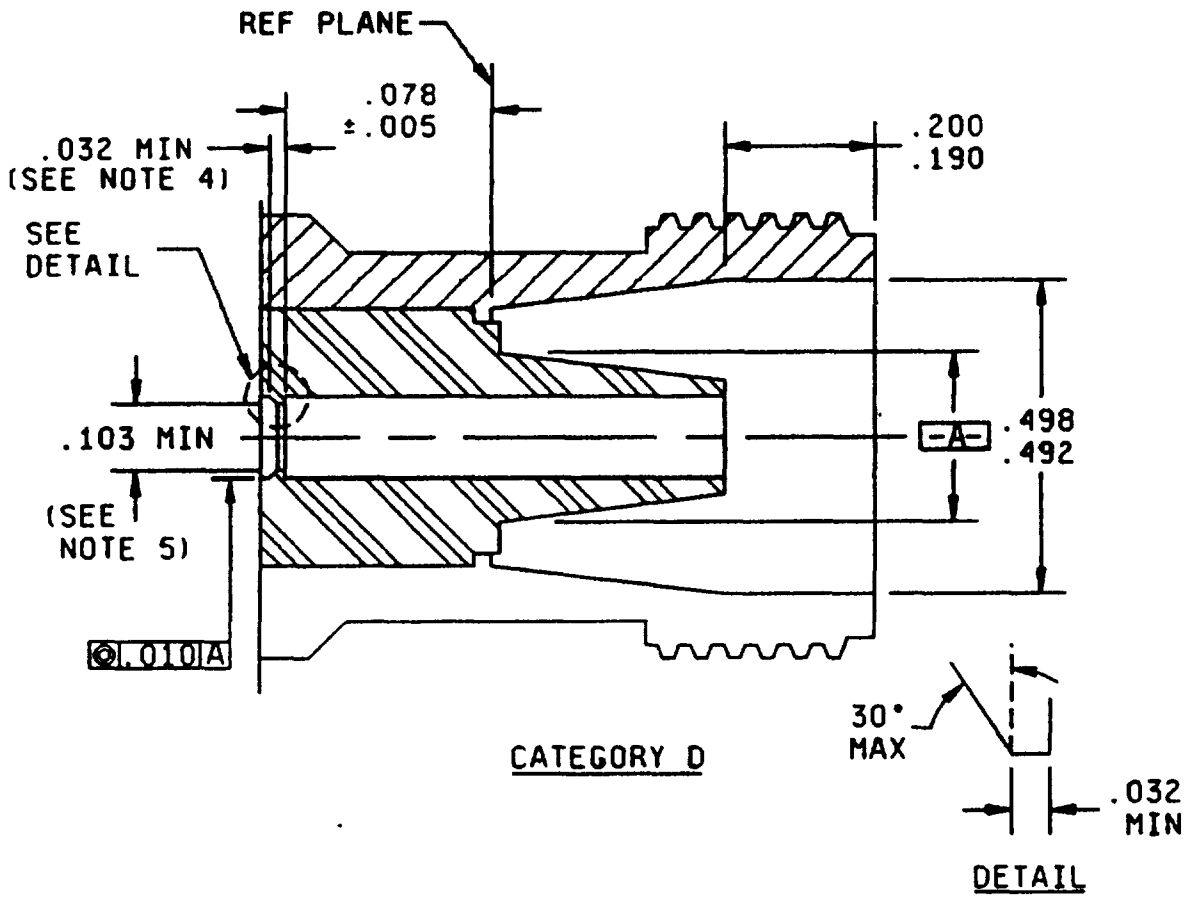

Inch	mm
.005	0 13
.010	0.25
.032	0 81
078	1.98
103	2 61
190	4.82
.200	5.08
.492	12.49
.498	12.65

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. All undimensioned pictorial configurations are for reference purposes only
4. Chamfer is optional. If chamfer is used, put chamfer on a 30° maximum
5. Dimension to meet connector performance requirements

FIGURE 2. Mating dimensions for socket termination

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:55Z
Check the source to verify that this is the current version before use.

TABLE I. Dash numbers, cross-reference, and dimensions

Dash no 1/	Applicable cable M17/ 2/	Dimensions	Inches (millimeters) maximum
CATEGORY A - FIELD SERVICEABLE (NO SPECIAL TOOLS REQUIRED) 3/			
0016 Cable group VIII	2-RG6 180-00001 73-RG212 162-00001 188-00001 199-00001 112-RG304 5/ 171-00001		
0015 Cable group X	6-RG11 4/ 181-00001 4/ 62-RG144 4/ 65-RG165 159-00001 74-RG213 189-00001 163-00001 75-RG214 190-00001 164-00001 86-00001 6/ 127-RG393 5/ 174-00001 77-RG216 4/ 191-00001 4/	A B	1.687 (42.85) .760 (19.30)
0018 Cable group XII	78-RG217 5/ 165-00001 188-00001	A B	1.875 (47.63) 891 (22 63)
0019 Cable group XIII	72-RG211 161-00001	A B	2.250 (57.15) 1.328 (33 73)
0020 Cable group XIV	79-RG218 5/ 166-00001 193-00001		
0017 Cable group XI	74-RG215 5/ 189-00002	A B	2 500 (63.50) 891 (22.63)
0021 Cable group IX	92-RG115 5/ 6/ 168-00001	A B	1 687 (42.85) 760 (19.30)

See footnotes at end of table

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:55Z
Check the source to verify that this is the current version before use.

TABLE I. Dash numbers, cross-reference, and dimensions - Continued.

Dash no. 1/	Applicable cable M17/ 2/	Dimensions	Inches (millimeters) maximum
CATEGORY C - FIELD REPLACEABLE (MIL-C-22520 CRIMP TOOL) SEE FOOTNOTE NEXT TO APPLICABLE CABLE FOR CRIMP DIE 3/ 7/			
0009 Cable group VIII	2-RG6 4/ 8/ 180-00001 4/ 8/ 73-RG212 8/ 162-00001 8/ 188-00001 8/ 199-00001 8/ 112-RG304 5/8/ 171-00001 8/	A B	1.875 (47 63) .766 (19 46)
0007 Cable group XA	65-RG165 5/6/9/ 159-00001 9/ 74-RG213 9/ 189-00001 9/ 163-00001 9/		
0008 Cable group XB	75-RG214 9/ 190-00001 9/ 164-00001 9/ 86-00001 6/9/ 127-RG393 5/9/ 174-00001 9/		
0010 Cable group XC	6-RG11 4/9/ 181-00001 4/9/ 62-RG144 4/5/6/9/		
0027 Cable group IX	92-RG115 5/6/9/ 168-00001 9/		
CATEGORY D - FIELD REPLACEABLE - DEFINED PIECE PART 3/7/10/11/			
0501 Cable group XB	75-RG214 190-00001 164-00001 86-00001 6/ 127-RG393 5/ 174-00001	A B	1.875 (47.63) .766 (19.46)
0502 Cable group XA	65-RG165 5/ 159-00001 74-RG213 189-00001 163-00001		
0503 Cable group VIB	60-RG142 6/ 158-00001 84-RG223 167-00001 194-00001 200-00001 128-RG400 5/ 175-00001	A B	1.875 (47.63) 766 (19 46)

See footnotes at end of table

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:55Z
Check the source to verify that this is the current version before use.

TABLE I. Dash numbers, cross-reference, and dimensions - Continued.

1/ For cross-reference of dash number to superseded PIN or type designation, see table IV.

2/ The latest version of each cable shall be applicable.

3/ These connectors have captivated center contacts.

4/ These are not 50-ohm cables; therefore, when attached to the specified connectors, VSWR, RF leakage, and insertion loss are not applicable.

5/ Cable to be used when performing tests requiring cable except as in 4/ and 6/.

6/ Cable to be used for the 200°C temperature cycling tests.

7/ These connectors are assembled, using the applicable crimp tool, to the specified cable stripper as shown on figure 4.


8/ M22520/5-35 closure A or M22520/5-55 closure A.

9/ M22520/5-61.

10/ Complete connector assembly shall consist of a body, center contact, ferrule, and assembly instructions

11/ Not to be used in army equipment.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:55Z
Check the source to verify that this is the current version before use.

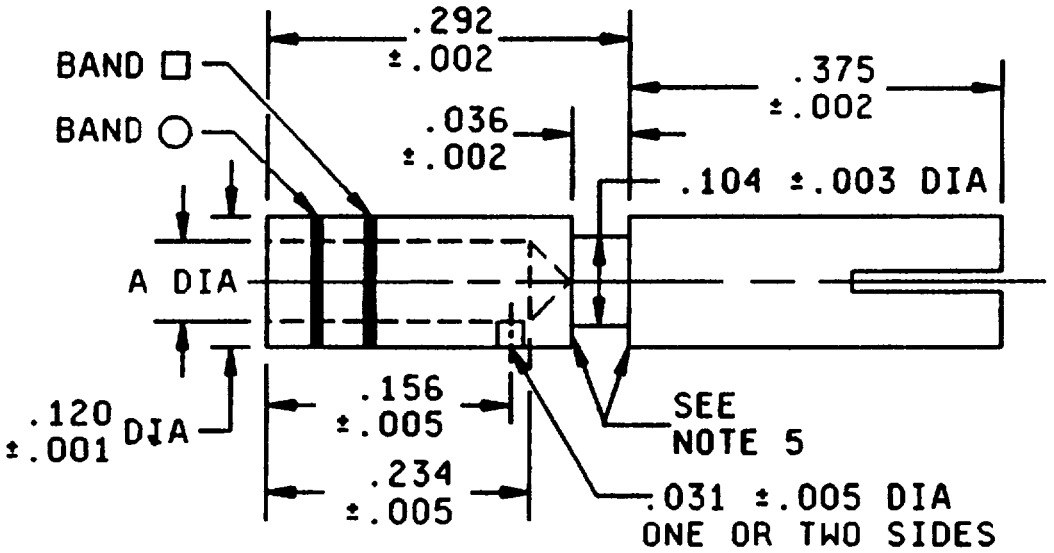

CENTER CONTACT

Inches	mm	Inches	mm	Inches	mm	Inches	mm
001	0.03	.043	1.09	.250	6.35	.492	12.50
.002	0.05	.098	2 49	.292	7.42	.500	12 70
.003	0.08	104	2.64	.351	8 92	.510	12.95
005	0 13	120	3 05	.375	9 52	600	15.24
.015	0.38	.156	3 96	.418	10.62		
.031	0.79	.220	5 59	.438	11.13		
.036	0.91	.234	5.94	.460	11.68		


Dash no.	Contact no 1/	A (inches)	Basic crimp tool 2/	Crimp die or positioner	Crimp tensile minimum	Color band □	Color band ○
0501 0502	36-10	098 ± 002	M22520/1-01	M22520/1-14	60 pounds	Red	White
0503	36-11	.043 +.001 -.002			20 pounds	Blue	

1/ Contacts numbers are for identification only
2/ Class 2 tool may be used by OEM (see MIL-C-22520)

NOTES:
1 Dimensions are in inches
2 Metric equivalents are given for information only
3 Contact material shall be phosphor bronze or copper beryllium
4 Crimp tensile test shall be in accordance with MIL-C-39029
5 Maximum break of .003 inch (0 08 mm)
6 Copyright notice All information disclosed in these specification sheet which is or may be copyrighted is reproduced herein with the express permission of the copyright owner
7 Color bands shall be positioned such that no coloring material enters the inspection hole

FIGURE 3 Contact and ferrule dimensions for category D only

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:55Z
Check the source to verify that this is the current version before use.

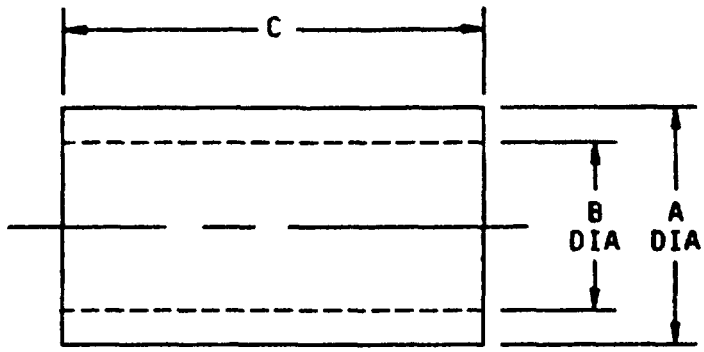


Dash number	Ferrule number 1/	A	B	C ±.015	Basic crimp tool 2/	Crimp die or positioner M22520/5-
0501	36-50	.492 ±.003	.438 ±.003	.600	M22520/5-01	25 Closure A or 61
0502	36-51	.492 ±.003	.418 ±.003	.600		
0503	36-52	.250 ±.003	.220 ± 003	.500		5, 11, 57 Closure A or 19 Closure B

1/ Ferrule numbers are for identification only.

2/ Class 2 tools may be used by OEM (see MIL-C-22520).

FIGURE 3 Contact and ferrule dimensions for category D only - Continued.

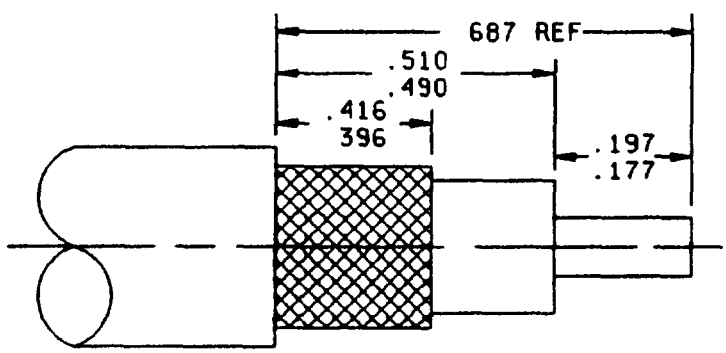

Inches	mm
.177	4.50
.197	5.00
.396	10.06
.416	10 57
490	12 45
.510	12 95
.687	17.45

NOTES.
1 Dimensions are in inches.
2 Metric equivalents are given for information only.

FIGURE 4 Cable stripping dimensions for field replaceable connectors

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:55Z
Check the source to verify that this is the current version before use.

ENGINEERING DATA:

Nominal impedance 50 ohms

Frequency range 0 to 11,000 MHz

Voltage rating

1,000 volts rms maximum working voltage at sea level

250 volts rms maximum at 70,000 feet

Temperature rating -65°C to +165°C.

REQUIREMENTS:

Design and configuration: See figure 1.

Force to engage and disengage:

Longitudinal force. Not applicable.

Torque: 6 inch-pounds maximum.

Coupling proof torque Not applicable.

Inspection conditions: Coupling torque. 6 to 10 inch-pounds.

Mating characteristics See figure 2 and MIL-STD-348 for dimensions.

Center contact (socket):

Oversize test pin .098 diameter minimum, 16 microinch finish (nonclosed entry contacts only).

Insertion depth. .125 minimum

Number of insertions: 1.

Insertion force test· Steel test pin diameter .092 minimum.

Test pin finish 16 microinches

Insertion force 2 pounds maximum

Withdrawal force test Steel test pin diameter 090 maximum.

Withdrawal force 2 ounces minimum

Test pin finish 16 microinches

Hermetic seal Not applicable.

Leakage (pressurized connectors). Not applicable

Insulation resistance Method 302 of MIL-STD-202, test condition B 5,000 megohms minimum.

Center contact retention (Applicable to captivated-center-contact connectors only) 15 pounds minimum axial force for all cables except RG400 and RG142, 6 pounds minimum for RG400 and RG142

Corrosion (salt spray) Method 101 of MIL-STD-202, test condition B

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:55Z
Check the source to verify that this is the current version before use.

Voltage standing wave ratio (VSWR): From 500 to 11,000 MHz, or approximately 80 percent of upper cutoff frequency of the cable, whichever is lower; 1.30 maximum.

Swept frequency VSWR test setup

Item 6: VSWR shall be less than 1.015 +.005 F (F in GHz)

Item 16: VSWR shall be less than 1.015 +.005 F (F in GHz).

Second step of VSWR checkout procedure - VSWR shall be less than 1.045 +.019 F (F in GHz).

Group B inspection - VSWR shall be less than 1.10 +.01 F (F in GHz).

Qualification and group C inspection - VSWR shall not exceed 1.15.

Connector durability. 500 cycles minimum at 12 cycles/minute maximum. The connector shall meet the mating characteristics and force to engage and disengage requirements.

Contact resistance: In milliohms maximum.

	Initial	After environment
Center contact	1.0	1.5
Outer contact	.15	Not applicable
Braid to body	.05	Not applicable

Dielectric withstanding voltage: Method 301 of MIL-STD-202. 3,000 volts rms minimum at sea level for connectors using other than RG400 and RG142, 1,500 volts rms minimum for connectors using RG400 and RG142

Vibration, high frequency: Method 204 of MIL-STD-202, test condition B No discontinuity permitted

Shock: Method 213 of MIL-STD-202, test condition I. No discontinuity permitted.

Thermal shock: Method 107 of MIL-STD-202, test condition B, except test high temperature shall be +85°C. High temperature shall be +200°C for connectors using +200°C cables (see table I and III).

Moisture resistance: Method 106 of MIL-STD-202. No measurements at high humidity Insulation resistance shall be at least 200 megohms within 5 minutes after removal from humidity.

Corona level

Voltage: 750 volts rms minimum

Altitude: 70,000 feet.

RF high potential withstanding voltage:

Voltage and frequency: 2,500 volts rms tested at a frequency from 5 to 7 5 MHz

Leakage current. Not applicable

Cable retention force:

Noncrimp assemblies: 75 pounds minimum

Crimp assemblies

50 lbs minimum for cables .155-.189 OD
60 lbs minimum for cables 190- 229 OD
75 lbs minimum for cables 230- 249 OD.
90 lbs minimum for cables 250 OD and larger

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:55Z
Check the source to verify that this is the current version before use.

Coupling mechanism retention force: Not applicable.

RF leakage. -90 dB minimum, tested at a frequency between 2 and 3 GHz.

Insertion loss:

.15 dB maximum at 9 GHz

.05 $\sqrt{F\ (GHz)}$ dB max tested at 3 GHz and 6 GHz.

Part or Identifying Number (PIN): M39012/36- (dash number from table I or "B" number from table III).

TABLE II. Group qualification. 1/

Group	Submission and qualification of any of the following connectors 2/ M39012/36	Qualifies the following connectors M39012/36
I	-0015	-0015 -0016 -0017 -0018 -0019 -0020 -0021
II	B0022	B0022 B0023 B0024 B0025 B0026
III	-0007	-0007 -0008 -0009 -0010 -0027
IV	-0501 -0502	-0501 -0502 -0503
V	-0503	-0503

1/ If a connector manufacturer produces a connector which meets all the requirements for two or more connector PIN's (within the same series), the manufacturer may receive qualification approval for two or more connector PIN's by qualifying the one connector It is not necessary that such connectors be in the same group Each connector, however, must be marked with its own appropriate PIN For group qualification, the connectors must be of similar design

2/ For qualification retention, where more than one part is listed in a group in this column, data may be supplied on any of those parts in order to retain qualification for those parts in the corresponding right-hand column The part does not necessarily have to be the part initially qualified

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:55Z
Check the source to verify that this is the current version before use.

TABLE III. CATEGORY B - NONFIELD REPLACEABLE (SPECIAL TOOLS MAY BE REQUIRED). 1/

NOT FOR ARMY, NAVY, OR AIR FORCE USE. FOR OEM USE ONLY

PIN 2/ 3/ M39012/36B	Applicable cable 4/ M17/	Dimensions	Inches (millimeters)
			Maximum
0022	65-RG165 5/ 74-RG213 6/	A B	1.875 (47.63) .766 (19.63)
0023	75-RG214 6/ RG-225/U 5/		
0024	73-RG212 6/ 112-RG304		
0025	6-RG11 6/7/ 62-RG144 5/7/		
0026	92-RG115 5/ 62-RG144 6/7/		

1/ For maintenance replacements for category B, see table V.

2/ For cross-reference of dash number to superseded PIN or type designation, see table IV.

3/ These connectors have captivated center contacts.

4/ The latest version of each cable shall be applicable.

5/ Cable to be used for the +200°C temperature cycling tests

6/ Cable to be used when performing tests requiring cable except as in 5/ and 7/.

7/ These are not 50-ohm cables; therefore, when attached to the specified connectors, VSWR, RF leakage, and insertion loss are not applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:55Z
Check the source to verify that this is the current version before use.

TABLE IV. Cross-reference of PIN's. 1/

Preferred PIN M39012/36	Substitute for PIN or type designation
-0007	
-0008	
-0009	
-0010	
-0014	
-0015	M39012/36-0001
-0016	M39012/36-0002
-0017	M39012/36-0011
-0018	M39012/36-0012
-0019	M39012/36-0013
-0020	M39012/36-0014
-0021	
B0022	M39012/36-0003, M23329/5-01, M23239/5-07, M23329/5-10, M39012/36-0022
B0023	M39012/36-0004, M23329/5-06, M23239/5-08, M39012/36-0023
B0024	M39012/36-0005, M39012/36-002
B0025	M39012/36-0006, M39012/36-0025
B0026	M39012/36-0026
-0027	
-0501	
-0502	
-0503	

1/ The superseded PIN or the type designation is for cross-reference only Where a superseded PIN or type designation is not given, none was assigned or will be assigned The PIN M39012/36-XXXX shall be used in all cases for marking and identifying the connector.

TABLE V. Maintenance replacements for category B

Category B number 1/	Category C dash number	Category A dash number	Category D dash number
B0022	0007	0015	0502
B0023	0008	0015	0501
B0024	0009	0016	---
B0025	0010	---	---
B0026	0027	0021	---

1/ Category B connectors are for original installation only They will not be stocked or procured by the Government

Revision letters are not used to denote changes due to the extensiveness of the changes

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:55Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - EC
Air Force - 85
NASA - NA

Review activities:
Army - AT, AV, EA, MI
Navy - AS, MC, OS, SH
Air Force - 11, 19, 99

Preparing activity:
DLA - ES

(Project 5935-3932-26)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:55Z
Check the source to verify that this is the current version before use.